
WHIT BSW, BSF, BSP




Same insert for External and Internal thread

Insert size	Pitch TPI	Ordering code	Toolholder
SL 26	14	**SL 26 - 14 W**	SR ..... - SL26 - ...
	11	**SL 26 - 11 W**	
SL 40	14	**SL 40 - 14 W**	SR ..... - SL40 - ...
	11	**SL 40 - 11 W**	

For Toolholders see pages B03-8 and 9

NPT



Conical pipe thread inserts are one-sided and may be used for both External and Internal threading

Insert size	Pitch TPI	Ordering code	Toolholder
SL 26	14	**SL 26 - 14 NPT**	SR ..... - SL26 - ...
	11.5	*** SL 26 - 11.5 NPT**	

* Cannot be used with Toolholder SRT17-...-SL26-2

For Toolholders see pages B03-8 and 9

For carbide grade and cutting speed see page B12-6

Slim MT

High productivity, Slim cost


A new product line of indexable Mill-Thread inserts and toolholders including multiple straight flutes for machining long threads from small to large diameters.

- **Advanced carbide and coating combination for extended tool life and improved productivity**
- **Most inserts are double sided**
- **Nickel coated holders for high wear resistance**
- **Unique clamping mechanism**
- **Large variety of holders & inserts in accordance to international standards**

Product Identification

Inserts

SL	26	I	1.5	ISO	MT17
Slim MT	Insert Size 26 = 26 mm 40 = 40 mm	I = Internal E = External - = Ex + In	Thread Pitch	ISO UN WHIT NPT BSPT	Carbide Grade

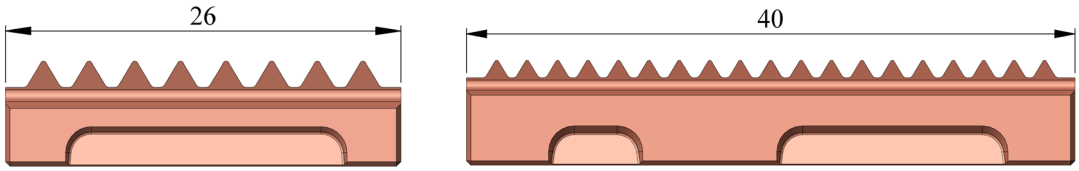

Toolholders

SR	T	22		45	SL26	3	C
SR Type	For Conical Inserts	Cutting Diameter 17 = 17 mm	Shank Diameter D1	Neck Length	Insert Size SL26 SL40	Number Of Inserts	Carbide Shank