


## ISO - metric Vertical

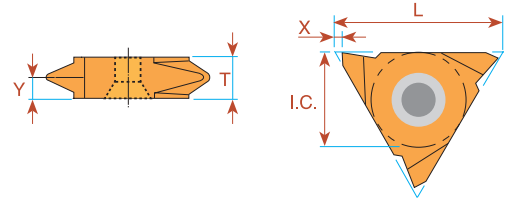


| Pitch<br>mm | L  | I.C.<br>in | <b>EXTERNAL</b>        |                        | <b>INTERNAL</b>        |                        | X   | Y   | T    |
|-------------|----|------------|------------------------|------------------------|------------------------|------------------------|-----|-----|------|
|             |    |            | Right Hand             | Left Hand              | Right Hand             | Left Hand              |     |     |      |
| 0.5         | 16 | 3/8        | <b>16V ER 0.5 ISO</b>  | <b>16V EL 0.5 ISO</b>  |                        |                        | 1.0 | 0.6 | 3.6  |
| 0.75        | 16 | 3/8        | <b>16V ER 0.75 ISO</b> | <b>16V EL 0.75 ISO</b> |                        |                        | 1.0 | 0.6 | 3.6  |
| 0.8         | 16 | 3/8        | <b>16V ER 0.8 ISO</b>  | <b>16V EL 0.8 ISO</b>  |                        |                        | 1.0 | 0.6 | 3.6  |
| 1.0         | 16 | 3/8        | <b>16V ER 1.0 ISO</b>  | <b>16V EL 1.0 ISO</b>  |                        |                        | 1.0 | 0.7 | 3.6  |
| 1.25        | 16 | 3/8        | <b>16V ER 1.25 ISO</b> | <b>16V EL 1.25 ISO</b> |                        |                        | 1.0 | 0.9 | 3.6  |
| 1.5         | 16 | 3/8        | <b>16V ER 1.5 ISO</b>  | <b>16V EL 1.5 ISO</b>  |                        |                        | 1.0 | 0.9 | 3.6  |
| 1.75        | 16 | 3/8        | <b>16V ER 1.75 ISO</b> | <b>16V EL 1.75 ISO</b> |                        |                        | 1.0 | 1.2 | 3.6  |
| 2.0         | 16 | 3/8        | <b>16V ER 2.0 ISO</b>  | <b>16V EL 2.0 ISO</b>  |                        |                        | 1.0 | 1.3 | 3.6  |
| 2.5         | 16 | 3/8        | <b>16V ER 2.5 ISO</b>  | <b>16V EL 2.5 ISO</b>  |                        |                        | 1.0 | 1.5 | 3.6  |
| 3.0         | 16 | 3/8        | <b>16V ER 3.0 ISO</b>  | <b>16V EL 3.0 ISO</b>  |                        |                        | 1.0 | 1.7 | 3.6  |
| * 8.0       | 27 | 5/8        | <b>27V ER 8.0 ISO</b>  | <b>27V EL 8.0 ISO</b>  | <b>27V IR 8.0 ISO</b>  | <b>27V IL 8.0 ISO</b>  | 1.8 | 5.2 | 10.4 |
| ** 10.0     | 27 | 5/8        | <b>27V ER 10.0 ISO</b> | <b>27V EL 10.0 ISO</b> | <b>27V IR 10.0 ISO</b> | <b>27V IL 10.0 ISO</b> | 1.8 | 5.2 | 10.4 |

Order example: 16V ER 1.5 ISO BMA

\* Minimum bore: Ø60 mm

\*\* Minimum bore: Ø72 mm

## Multitooth

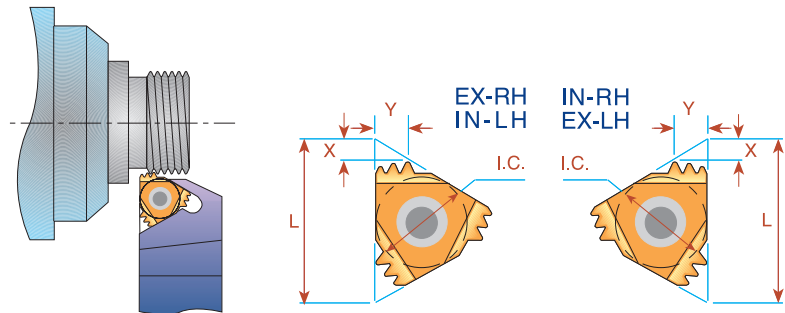

| Pitch<br>mm | L  | I.C.<br>in | Number<br>of Teeth | <b>EXTERNAL</b>         | Anvil | <b>INTERNAL</b>         | Anvil | X   | Y   |
|-------------|----|------------|--------------------|-------------------------|-------|-------------------------|-------|-----|-----|
|             |    |            |                    | Ordering Code           |       | Ordering Code           |       |     |     |
| 1.0         | 16 | 3/8        | 3                  | <b>16 ER 1.0 ISO 3M</b> | AE16M | <b>16 IR 1.0 ISO 3M</b> | AI16M | 1.7 | 2.5 |
| 1.5         | 16 | 3/8        | 2                  | <b>16 ER 1.5 ISO 2M</b> | AE16M | <b>16 IR 1.5 ISO 2M</b> | AI16M | 1.5 | 2.3 |
| 2.0         | 16 | 3/8        | 2                  | <b>16 ER 2.0 ISO 2M</b> | AE16M | <b>16 IR 2.0 ISO 2M</b> | AI16M | 2.0 | 3.0 |
| 1.5         | 22 | 1/2        | 3                  | <b>22 ER 1.5 ISO 3M</b> | AE22M | <b>22 IR 1.5 ISO 3M</b> | AI22M | 2.3 | 3.7 |
| 2.0         | 22 | 1/2        | 2                  | <b>22 ER 2.0 ISO 2M</b> | AE22M | <b>22 IR 2.0 ISO 2M</b> | AI22M | 2.0 | 3.0 |
| 2.0         | 22 | 1/2        | 3                  | <b>22 ER 2.0 ISO 3M</b> | AE22M | <b>22 IR 2.0 ISO 3M</b> | AI22M | 3.1 | 5.0 |
| 2.5         | 22 | 1/2        | 2                  | <b>22 ER 2.5 ISO 2M</b> | AE22M | <b>22 IR 2.5 ISO 2M</b> | AI22M | 2.4 | 3.7 |
| 2.5         | 22 | 1/2        | 3                  | <b>22 ER 2.5 ISO 3M</b> | AE22M | <b>22 IR 2.5 ISO 3M</b> | AI22M | 3.8 | 6.2 |
| 3.0         | 27 | 5/8        | 2                  | <b>27 ER 3.0 ISO 2M</b> | AE27M | <b>27 IR 3.0 ISO 2M</b> | AI27M | 2.9 | 4.6 |

Order example: 22 IR 2.0 ISO 2M BMA

For recommended number of passes see page A04-4

For carbide grade and cutting speed see page A04-2 and 3

## Carbide Grade Selection

Choose the CPT grade specifically formulated for your application from the following list:

### Coated Grades

**HBA**  
(H10-H25)  
(S10-S25)

Extra-fine sub-micron grade with high toughness, for optimized performance on hardened steels and cast iron up to 62HRC, titanium alloys and super alloys (hastelloy, inconel and nickel based alloys).

**BLU**  
(M10-M20)  
(K05-K20)  
(N10-N20)  
(S10-S20)

PVD triple layer coated sub-micron grade for stainless steels, cast iron, titanium, non ferrous metals and most of the high temperature alloys.

**BMA**  
(P20-P40)  
(K20-K30)

PVD TiAlN coated sub-micrograin grade for stainless steels and exotic materials at medium to high cutting speeds.

**P25C**  
(P15-P35)

PVD TiN coated grade for treated and hard alloy steels (25 HRc & up) at medium to low cutting speeds.

**MXC**  
(K10-K20)  
(P10-P25)

PVD TiN coated micrograin for free cutting untreated alloy steels (below 30 HRc), for stainless steels and cast iron.

**BXC**  
(P30-P50)  
(K25-K40)

PVD TiN coated grade for low cutting speed. Works well with wide range of stainless steels.

### Uncoated Grades

**P30\***  
(P20-P30)

Carbide grade for carbon and cast steels, works well at medium to low cutting speeds.

**K20\***  
(K10-K30)

Carbide grade for non ferrous metals, aluminum and cast iron.

\* Upon request


**Note:** Due to our unique and specialized production techniques, CPT coated inserts provide superior cutting performance and exceptionally long tool life.

### Grade availability per inserts size

| Grade        | HBA            | BLU              | BMA                          | P25C                | MXC                 | BXC    | P30                 | K20                         |
|--------------|----------------|------------------|------------------------------|---------------------|---------------------|--------|---------------------|-----------------------------|
| Insert sizes | 11, 16, 22, 27 | 11, 16, 22       | 06, 08, 11, 16, 22, 27, 33U, | 11, 16, 22, 27, 33U | 11, 16, 22, 27, 33U | 06, 08 | 11, 16, 22, 27, 33U | 06, 08, 11, 16, 22, 27, 33U |
|              |                | Type-B<br>11, 16 | Type-B<br>11, 16             |                     |                     |        |                     |                             |

## Type B - Threading Inserts

A combination of ground profile, and sintered chip-breaker threading inserts. Unlike most other manufacturers inserts, this combination ensures a consistent high quality thread, with precise shape and dimensions. Two different unique styles of chip-breaker were designed to suit the different specific requirements of Internal threads and External threads. All of CPT Type B inserts are made of BMA Sub-Micrograin grade.



## Recommended cutting speed (m/min) for thread turning inserts

| ISO Standard                                 | Material  |                              | Condition                |         |         |         |         |         |         |         |
|--|---|------------------------------|--------------------------|---------|---------|---------|---------|---------|---------|---------|
|  |   |                              |                          | HBA     | BLU     | BMA     | P25C    | MXC     | BXC     | K20     |
| <b>P</b>                                     | Non-Alloy Steel and Cast Steel, Free Cutting Steel              | <0.25%C                      | Annealed                 | 110-210 | 120-180 | 100-180 | 100-180 | 70-150  | 50-130  |         |
|  |   | ≥0.25%C                      | Annealed                 |         |         |         |         |         |         |         |
|  |   | <0.55%C                      | Quenched & Tempered      |         |         |         |         |         |         |         |
|  |   | ≥0.55%C                      | Annealed                 |         |         |         |         |         |         |         |
|  | Low Alloy Steel and Cast Steel (less than 5% alloying elements) | Annealed                     |                          | 90-140  | 80-130  | 70-120  | 70-120  | 60-90   | 50-80   |         |
|  |   | Quenched & Tempered          |                          |         |         |         |         |         |         |         |
| High Alloy Steel, Cast Steel, and Tool Steel | Annealed  |                              | 70-90                    | 60-80   | 50-60   | 55-70   | 50-60   | 40-50   |         |         |
|  | Quenched & Tempered   |                              |                          |         |         |         |         |         |         |         |
| <b>M</b>                                     | Stainless Steel and Cast Steel                                  |                              | Ferritic / Martensitic   | 110-160 | 90-130  | 60-90   | 60-90   | 50-80   | 50-80   |         |
|  |   |                              | Martensitic              |         |         |         |         |         |         |         |
|  |   |                              | Austenitic               |         |         |         |         |         |         |         |
| <b>K</b>                                     | Cast Iron Nodular (GGG)   |                              | Ferritic / Pearlitic     | 120-150 | 100-130 | 80-110  | 60-90   |         |         |         |
|  |   |                              | Pearlitic                |         |         |         |         |         |         |         |
|  | Grey Cast Iron (GG)   |                              | Ferritic                 | 140-150 | 120-130 | 90-100  | 65-85   |         |         |         |
|  |   |                              | Pearlitic                |         |         |         |         |         |         |         |
| Malleable Cast Iron                          |   | Ferritic                     | 110-140                  | 100-130 | 80-100  | 60-85   |         |         |         |         |
|  |   | Pearlitic                    |                          |         |         |         |         |         |         |         |
| <b>N</b>                                     | Aluminum-Wrought Alloy  |                              | Not Cureable             | 250-500 |         |         | 200-400 | 150-400 | 200-400 | 100-400 |
|  |   |                              | Cured                    |         |         |         |         |         |         |         |
|  | Aluminum-Cast, Alloyed  | ≤12% Si                      | Not Cureable             | 280-500 |         |         | 200-500 | 150-350 | 200-500 | 110-300 |
|  |   |                              | Cured                    |         |         |         |         |         |         |         |
|  |   | >12% Si                      | High Temperature         |         |         |         |         |         |         |         |
|  | Copper Alloys   | >1% Pb                       | Free Cutting             | 190-350 |         |         | 150-250 | 110-180 | 150-250 | 90-150  |
|  |   |                              | Brass                    |         |         |         |         |         |         |         |
| Electrolytic Copper                          |   |                              |                          |         |         |         |         |         |         |         |
| Non Metallic                                 |   | Duroplastics, Fiber Plastics |                          |         |         | 200-300 | 150-210 | 100-200 | 110-150 |         |
|  |   | Hard Rubber                  |                          |         |         |         |         |         |         |         |
| <b>S</b>                                     | High Temp. Alloys, Super Alloys                                 | Fe based                     | Annealed                 | 20-80   | 30-65   | 25-60   |         |         |         |         |
|  |   |                              | Cured                    |         |         |         |         |         |         |         |
|  |   | Ni or Co based               | Annealed                 |         |         |         |         |         |         |         |
|  |   |                              | Cured                    |         |         |         |         |         |         |         |
|  | Titanium Alloys   |                              | Alpha +Beta Alloys Cured | 30-60   | 40-50   | 35-45   |         |         | 35-45   |         |
| <b>H</b>                                     | Hardened Steel  |                              | Hardened 45-50 HRc       | 30-60   | 40-50   | 35-45   |         |         |         |         |
|  |   |                              | Hardened 51-55 HRc       |         |         |         |         |         |         |         |
|  |   |                              | Hardened 56-62 HRc       |         |         |         |         |         |         |         |
|  | Chilled Cast Iron   |                              | Cast                     | 20-50   | 30-40   | 25-35   |         |         |         |         |
| Cast Iron                                    |   | Hardened                     | 20-40                    | 20-30   | 15-25   |         |         |         |         |         |


## Number of threading passes selection for single point inserts

| Pitch:           | mm<br>TPI | 0.5<br>48 | 0.8<br>32 | 1.0<br>24 | 1.25<br>20 | 1.5<br>16 | 1.75<br>14 | 2.0<br>12 | 2.5<br>10 | 3.0<br>8 | 4.0<br>6 | 6.0<br>4 |
|------------------|-----------|-----------|-----------|-----------|------------|-----------|------------|-----------|-----------|----------|----------|----------|
| Number of Passes |           | 3-6       | 4-7       | 4-9       | 6-10       | 5-11      | 9-12       | 6-13      | 7-15      | 8-17     | 10-20    | 11-22    |

### NOTES:


1. For most standard applications the middle of the range is a good starting point.
2. For most materials, the tougher the material, the higher the number of cutting passes you should select.
3. As a general rule of thumb, fewer passes are better than more speed.

## Thread Turning Methods

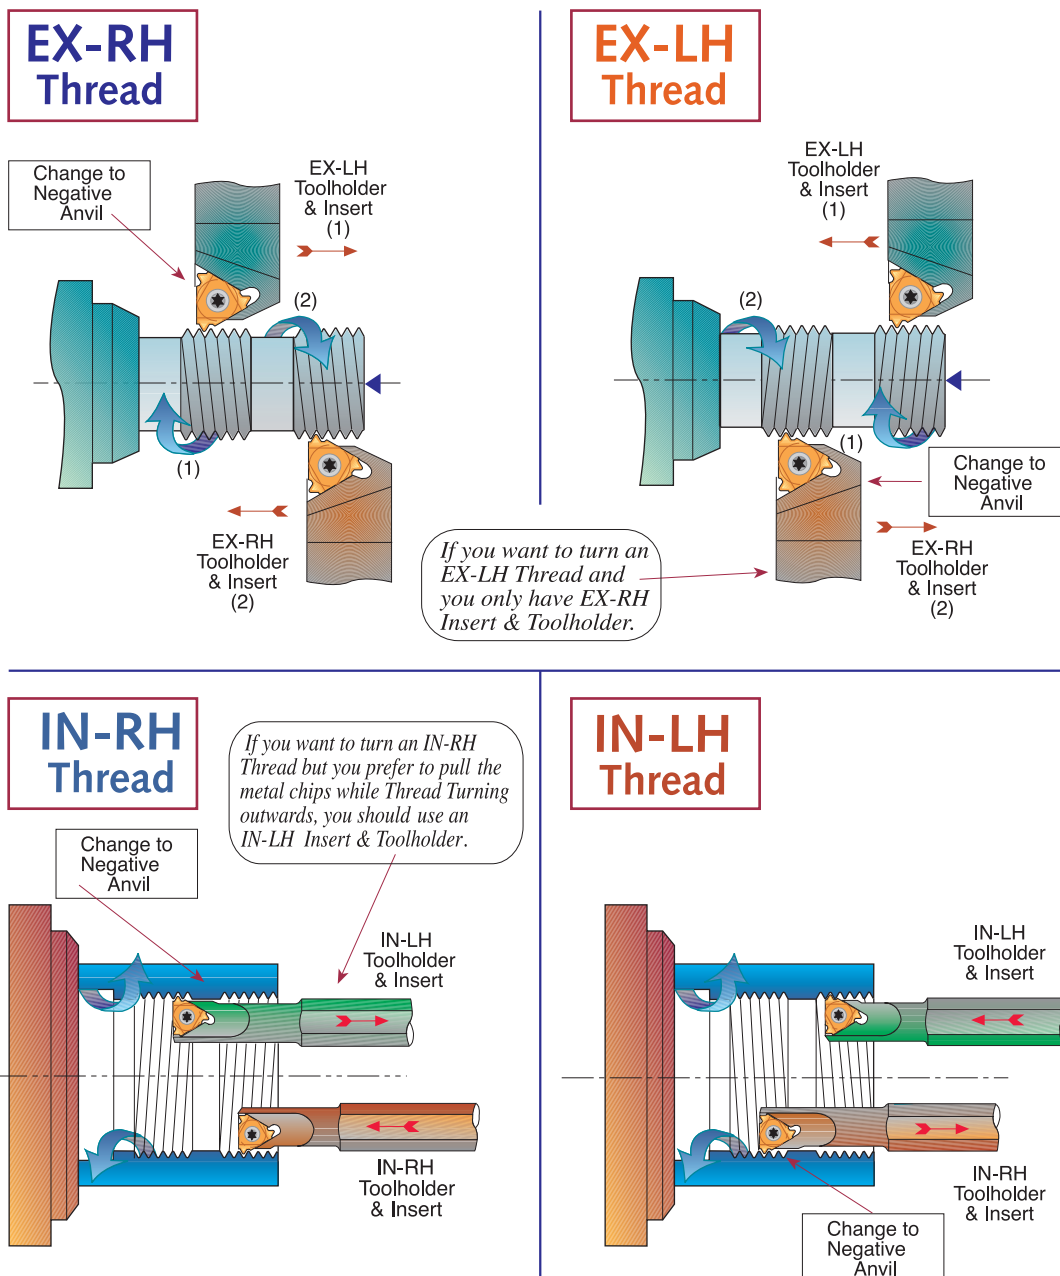


# Important Points about CPT Threading Inserts


1. In most thread forms internal and external threads have different depth and radii, thus tools are not interchangeable




2. The Insert relief angle of a standard CPT external toolholder is 10°; for an internal toolholder it is 15°. This 5° difference is to provide additional necessary radial clearance.



3. Our built-in relief angles ensure automatic insert flank angle clearance.




4. Profiles of CPT internal & external threading inserts are precision ground to ensure accurate thread geometry when used in their corresponding toolholders. Using internal inserts with an external holder will result in distortion of angle and insert geometry.






5. Insert and toolholder should always match. An IN-RH insert must be used with an IN-RH toolholder. No mismatch is allowed.



## Flank Clearance Angle $\omega$

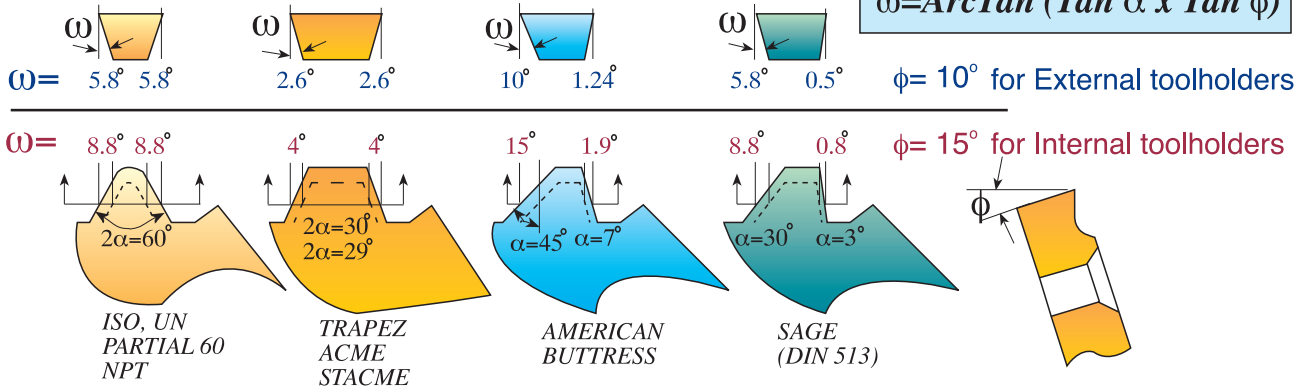

## Anvil Change Recommendation

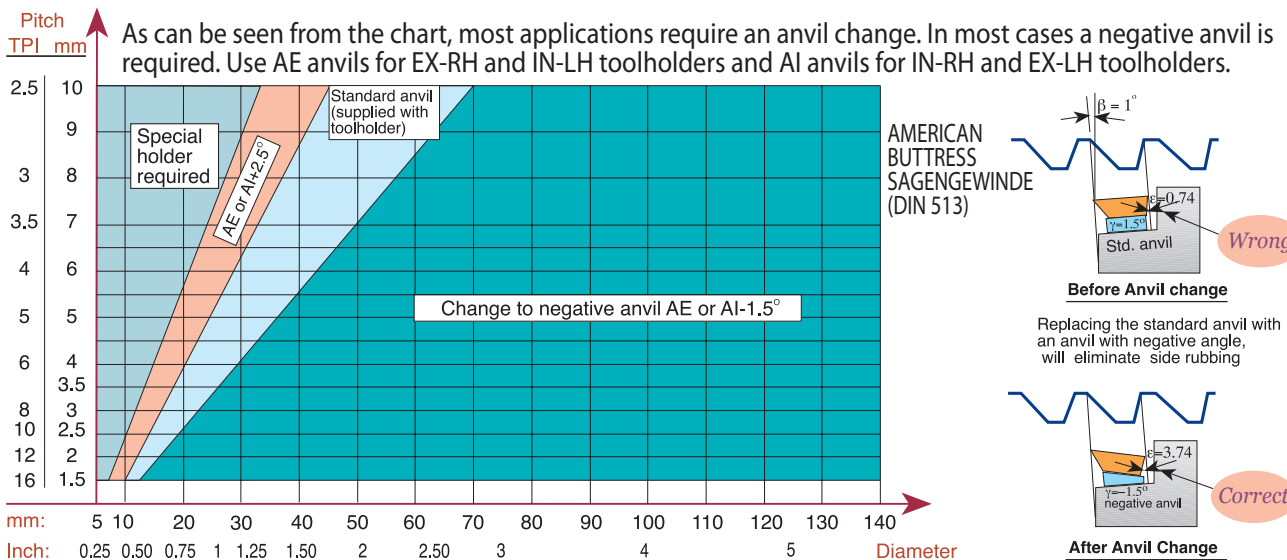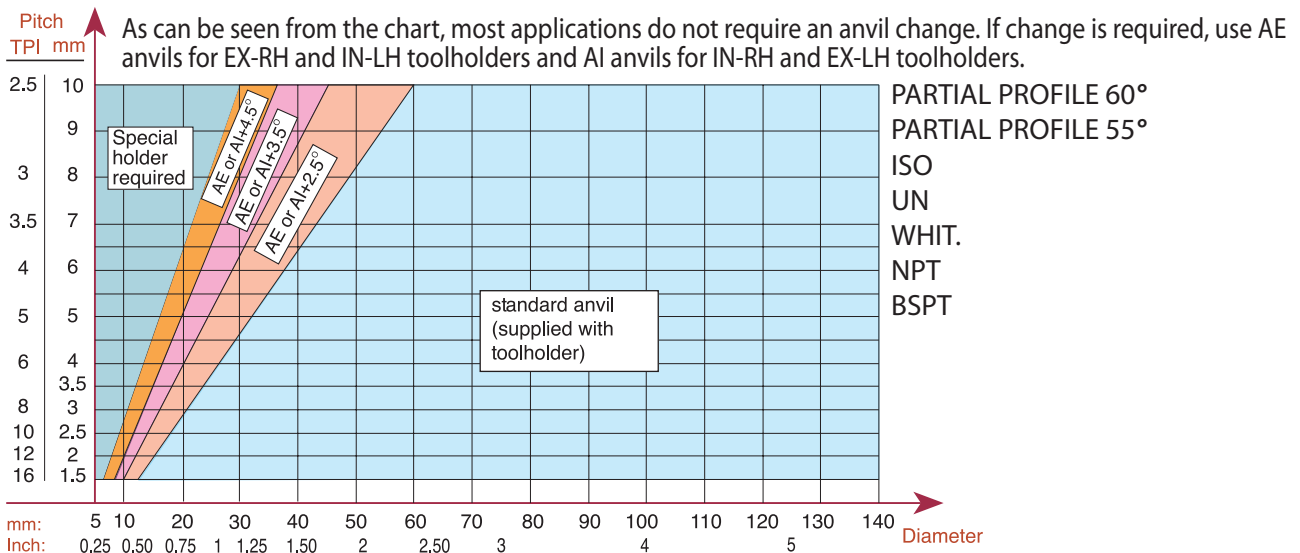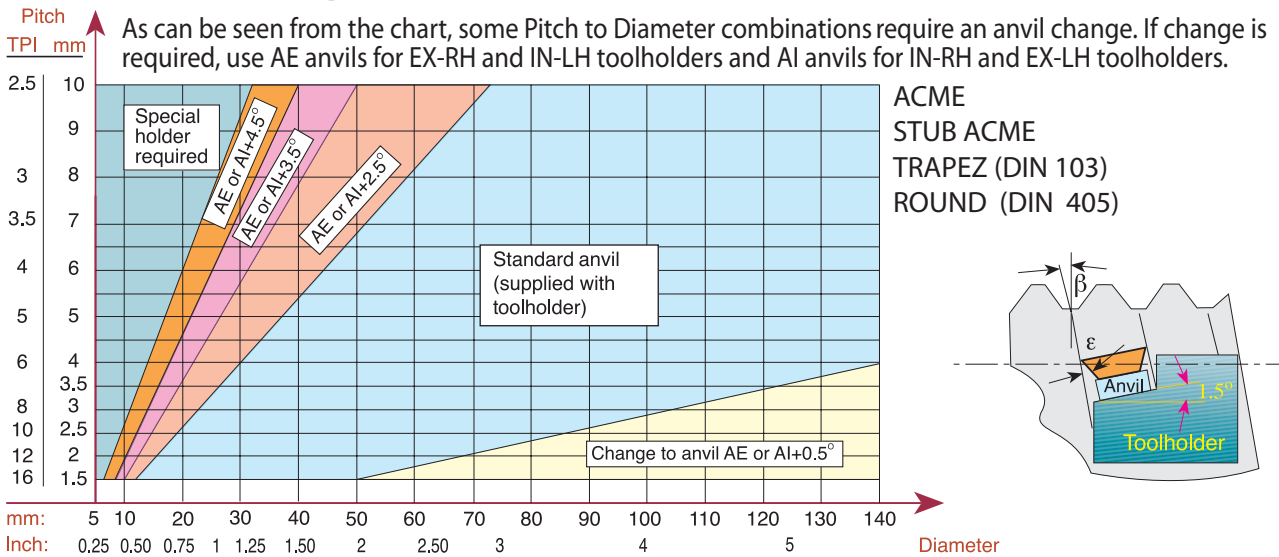

## Threading Inserts Standards

| Thread Profile        | Standard             | Thread Class            |
|-----------------------|----------------------|-------------------------|
| ISO                   | DIN 13               | 6g / 6H                 |
| UN                    | ANSI B1.1-1989       | 2A / 2B                 |
| WHITWORTH             | B.S. 84: 1956        | Medium Class            |
| NPT                   | ANSI B1.20.1-1983    | -                       |
| NPTF                  | ANSI B1.20.3-1976    | -                       |
| NPS                   | ANSI B1.20.1-1983    | -                       |
| NPSM                  | ANSI B1.20.1-1983    | -                       |
| BSPT                  | B.S. 21: 1957        | -                       |
| DIN 477               | DIN 477              | -                       |
| ACME                  | ANSI B1.5-1988       | 3G (EXT), 3G / 2G (INT) |
| STUB ACME             | ANSI B1.5-1988       | 2G                      |
| TRAPEZ                | DIN 103              | 7e / 7H                 |
| ROUND                 | DIN 405              | Class 7                 |
| UNJ                   | MIL-S-8879C          | 3A / 3B                 |
| MJ                    | ISO 5855             | 4h/6h, 4H/5H            |
| AMERICAN BUTTRESS     | ANSI B1.9-1973       | Class 2                 |
| SAGENGWINDE           | DIN 513              | -                       |
| PG                    | DIN 40430            | -                       |
| V-0.040               | API Spec7            | -                       |
| V-0.038R              | API Spec7            | -                       |
| V-0.050               | API Spec7            | -                       |
| V-0.055               | API Spec7            | -                       |
| API ROUND             | API Spec Standard 5B | -                       |
| EXTREME – LINE CASING | API Spec Standard 5B | -                       |
| BUTTRESS CASING       | API Spec Standard 5B | -                       |
| VAM                   | VAM                  | -                       |
| HUGHES                | HUGHES               | -                       |
| PAC                   | PAC                  | -                       |

DIN: **Deutsches Institut für Normung**  
 ANSI: **American National Standards Institute**  
 API: **American Petroleum Institute**  
 B.S.: **British Standards**  
 ISO: **International Organisation for Standardization**  
 MIL-S: **Military Specification**  
 NPT: **American National Standard Taper Pipe Thread**  
 NPTF: **National Standard Taper Fuel:Dryseal USA**  
 PAC: **Pacific Asia Connection**  
 NPS: **Straight thread,same as NPT without taper**  
 NPSM: **Free-Fitting Mechanical Joints**

## Product Identification

### Thread Turning Inserts Ordering Codes

