

YG 4G MILL END MILLS

PLAIN SHANK


SEM846 SERIES

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- **VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETL**
- **Fraise carbure, 2 dents, hémisphérique, détalonnée**
- **MD, 2 TAGLIANTI, SEMISFERICA, SCARICATA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRc55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE
2
30°
R ±0.005
R ±0.010
PLAIN
P.278-289

R0.05-R3 R4-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
SEM846001002E	R0.05	0.1	4	0.1	0.2	40	0.085
SEM846001003E	R0.05	0.1	4	0.1	0.3	40	0.085
SEM846001005E	R0.05	0.1	4	0.1	0.5	40	0.085
SEM84600101E	R0.05	0.1	4	0.1	1	40	0.085
★ SEM846002005E	R0.1	0.2	4	0.2	0.5	40	0.17
★ SEM84600201E	R0.1	0.2	4	0.2	1	40	0.17
SEM846002015E	R0.1	0.2	4	0.2	1.5	40	0.17
★ SEM84600202E	R0.1	0.2	4	0.2	2	40	0.17
SEM84600203E	R0.1	0.2	4	0.2	3	40	0.17
★ SEM84600301E	R0.15	0.3	4	0.3	1	40	0.27
★ SEM846003015E	R0.15	0.3	4	0.3	1.5	40	0.27
★ SEM84600302E	R0.15	0.3	4	0.3	2	40	0.27
SEM846003025E	R0.15	0.3	4	0.3	2.5	40	0.27
★ SEM84600303E	R0.15	0.3	4	0.3	3	40	0.27
★ SEM84600304E	R0.15	0.3	4	0.3	4	40	0.27
SEM84600305E	R0.15	0.3	4	0.3	5	40	0.27
★ SEM84600401E	R0.2	0.4	4	0.4	1	40	0.37
★ SEM846004015E	R0.2	0.4	4	0.4	1.5	40	0.37
★ SEM84600402E	R0.2	0.4	4	0.4	2	40	0.37
★ SEM846004025E	R0.2	0.4	4	0.4	2.5	40	0.37
★ SEM84600403E	R0.2	0.4	4	0.4	3	40	0.37
★ SEM84600404E	R0.2	0.4	4	0.4	4	40	0.37
★ SEM84600405E	R0.2	0.4	4	0.4	5	40	0.37
★ SEM84600406E	R0.2	0.4	4	0.4	6	40	0.37

★ : Stock Item

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	○	◎	◎	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel		Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○	○	○	◎	○

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETL
- () Fraise carbure, 2 dents, hémisphérique, détalonnée
- () MD, 2 TAGLIENTI, SEMISFERICA, SCARICATA

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE 2 30° ±0.005 ±0.010 PLAIN P.278-289

R0.05-R3 R4-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
SEM84600408E	R0.2	0.4	4	0.4	8	40	0.37
SEM84600410E	R0.2	0.4	4	0.4	10	40	0.37
★ SEM84600501E	R0.25	0.5	4	0.5	1	45	0.45
SEM846005015E	R0.25	0.5	4	0.5	1.5	45	0.45
★ SEM84600502E	R0.25	0.5	4	0.5	2	45	0.45
SEM846005025E	R0.25	0.5	4	0.5	2.5	45	0.45
★ SEM84600503E	R0.25	0.5	4	0.5	3	45	0.45
★ SEM84600504E	R0.25	0.5	4	0.5	4	45	0.45
★ SEM84600505E	R0.25	0.5	4	0.5	5	45	0.45
★ SEM84600506E	R0.25	0.5	4	0.5	6	45	0.45
★ SEM84600508E	R0.25	0.5	4	0.5	8	45	0.45
★ SEM84600510E	R0.25	0.5	4	0.5	10	45	0.45
SEM84600512E	R0.25	0.5	4	0.5	12	45	0.45
SEM84600514E	R0.25	0.5	4	0.5	14	45	0.45
SEM84600516E	R0.25	0.5	4	0.5	16	45	0.45
★ SEM84600601E	R0.3	0.6	4	0.6	1	45	0.55
★ SEM84600602E	R0.3	0.6	4	0.6	2	45	0.55
★ SEM84600603E	R0.3	0.6	4	0.6	3	45	0.55
★ SEM84600604E	R0.3	0.6	4	0.6	4	45	0.55
★ SEM84600605E	R0.3	0.6	4	0.6	5	45	0.55
★ SEM84600606E	R0.3	0.6	4	0.6	6	45	0.55
★ SEM84600608E	R0.3	0.6	4	0.6	8	45	0.55
★ SEM84600610E	R0.3	0.6	4	0.6	10	45	0.55
★ SEM84600612E	R0.3	0.6	4	0.6	12	45	0.55

★ : Stock Item

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○

YG 4G MILL END MILLS

PLAIN SHANK


SEM846 SERIES

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- **VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETL**
- **Fraise carbure, 2 dents, hémisphérique, détalonnée**
- **MD, 2 TAGLIANTI, SEMISFERICA, SCARICATA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRc55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE
2
30°
R ±0.005
R ±0.010
PLAIN
P.278-289

R0.05-R3 R4-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
SEM84600614E	R0.3	0.6	4	0.6	14	45	0.55
SEM84600616E	R0.3	0.6	4	0.6	16	45	0.55
★ SEM84600702E	R0.35	0.7	4	0.7	2	45	0.65
★ SEM84600704E	R0.35	0.7	4	0.7	4	45	0.65
★ SEM84600706E	R0.35	0.7	4	0.7	6	45	0.65
SEM84600708E	R0.35	0.7	4	0.7	8	45	0.65
SEM84600710E	R0.35	0.7	4	0.7	10	45	0.65
SEM84600712E	R0.35	0.7	4	0.7	12	45	0.65
SEM84600801E	R0.4	0.8	4	0.8	1	45	0.75
★ SEM84600802E	R0.4	0.8	4	0.8	2	45	0.75
★ SEM84600803E	R0.4	0.8	4	0.8	3	45	0.75
★ SEM84600804E	R0.4	0.8	4	0.8	4	45	0.75
★ SEM84600805E	R0.4	0.8	4	0.8	5	45	0.75
★ SEM84600806E	R0.4	0.8	4	0.8	6	45	0.75
★ SEM84600808E	R0.4	0.8	4	0.8	8	45	0.75
★ SEM84600810E	R0.4	0.8	4	0.8	10	45	0.75
★ SEM84600812E	R0.4	0.8	4	0.8	12	45	0.75
SEM84600814E	R0.4	0.8	4	0.8	14	45	0.75
SEM84600816E	R0.4	0.8	4	0.8	16	45	0.75
SEM84600820E	R0.4	0.8	4	0.8	20	45	0.75
★ SEM84600904E	R0.45	0.9	4	0.9	4	45	0.85
SEM84600906E	R0.45	0.9	4	0.9	6	45	0.85
★ SEM84600908E	R0.45	0.9	4	0.9	8	45	0.85
SEM84600910E	R0.45	0.9	4	0.9	10	45	0.85

★ : Stock Item

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○	○	◎	◎	○

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETTEL
- Fraise carbure, 2 dents, hémisphérique, détalonnée
- MD, 2 TAGLIENTI, SEMISFERICA, SCARICATA

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE 2 30° ±0.005 ±0.010 PLAIN P.278-289

R0.05-R3 R4-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
★ SEM84601002E	R0.5	1.0	4	1	2	50	0.95
★ SEM84601003E	R0.5	1.0	4	1	3	50	0.95
★ SEM84601004E	R0.5	1.0	4	1	4	50	0.95
★ SEM84601005E	R0.5	1.0	4	1	5	50	0.95
★ SEM84601006E	R0.5	1.0	4	1	6	50	0.95
★ SEM84601007E	R0.5	1.0	4	1	7	50	0.95
★ SEM84601008E	R0.5	1.0	4	1	8	50	0.95
SEM84601009E	R0.5	1.0	4	1	9	50	0.95
★ SEM84601010E	R0.5	1.0	4	1	10	50	0.95
★ SEM84601012E	R0.5	1.0	4	1	12	50	0.95
★ SEM84601014E	R0.5	1.0	4	1	14	50	0.95
★ SEM84601016E	R0.5	1.0	4	1	16	50	0.95
★ SEM84601018E	R0.5	1.0	4	1	18	50	0.95
★ SEM84601020E	R0.5	1.0	4	1	20	50	0.95
SEM84601022E	R0.5	1.0	4	1	22	60	0.95
★ SEM84601026E	R0.5	1.0	4	1	26	60	0.95
★ SEM84601030E	R0.5	1.0	4	1	30	70	0.95
SEM84601040E	R0.5	1.0	4	1	40	80	0.95
SEM84601050E	R0.5	1.0	4	1	50	100	0.95
★ SEM84601204E	R0.6	1.2	4	1.2	4	50	1.15
★ SEM84601206E	R0.6	1.2	4	1.2	6	50	1.15
★ SEM84601208E	R0.6	1.2	4	1.2	8	50	1.15
★ SEM84601210E	R0.6	1.2	4	1.2	10	50	1.15
★ SEM84601212E	R0.6	1.2	4	1.2	12	50	1.15

★ : Stock Item


▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																				◎	○



CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- **VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETL**
- **Fraise carbure, 2 dents, hémisphérique, détalonnée**
- **MD, 2 TAGLIANTI, SEMISFERICA, SCARICATA**

- ▶ Due to new coating and new tool geometry, outstanding cutting ability and wear resistance.
- ▶ Due to unique ball nose geometry and cutting edges, cutting force decreased, and so wear resistance increased.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRc55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE 2 30° ±0.005 ±0.010 PLAIN P.278-289

R0.05-R3 R4-R6

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
★ SEM84601216E	R0.6	1.2	4	1.2	16	50	1.15
SEM84601220E	R0.6	1.2	4	1.2	20	50	1.15
SEM84601226E	R0.6	1.2	4	1.2	26	60	1.15
SEM84601406E	R0.7	1.4	4	1.4	6	50	1.35
SEM84601408E	R0.7	1.4	4	1.4	8	50	1.35
SEM84601410E	R0.7	1.4	4	1.4	10	50	1.35
SEM84601412E	R0.7	1.4	4	1.4	12	50	1.35
SEM84601416E	R0.7	1.4	4	1.4	16	50	1.35
★ SEM84601503E	R0.75	1.5	4	1.5	3	50	1.45
★ SEM84601504E	R0.75	1.5	4	1.5	4	50	1.45
★ SEM84601505E	R0.75	1.5	4	1.5	5	50	1.45
★ SEM84601506E	R0.75	1.5	4	1.5	6	50	1.45
SEM84601507E	R0.75	1.5	4	1.5	7	50	1.45
★ SEM84601508E	R0.75	1.5	4	1.5	8	50	1.45
★ SEM84601510E	R0.75	1.5	4	1.5	10	50	1.45
★ SEM84601512E	R0.75	1.5	4	1.5	12	50	1.45
★ SEM84601514E	R0.75	1.5	4	1.5	14	50	1.45
★ SEM84601516E	R0.75	1.5	4	1.5	16	50	1.45
★ SEM84601518E	R0.75	1.5	4	1.5	18	50	1.45
★ SEM84601520E	R0.75	1.5	4	1.5	20	50	1.45
SEM84601522E	R0.75	1.5	4	1.5	22	60	1.45
SEM84601526E	R0.75	1.5	4	1.5	26	60	1.45
SEM84601530E	R0.75	1.5	4	1.5	30	70	1.45
SEM84601535E	R0.75	1.5	4	1.5	35	70	1.45

★ : Stock Item ▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	○	◎	◎	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel		Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○	○	○	◎	○

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETTEL
- () Fraise carbure, 2 dents, hémisphérique, détalonnée
- () MD, 2 TAGLIENTI, SEMISFERICA, SCARICATA

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE 2 30° ±0.005 ±0.010 PLAIN P.278-289

R0.05-R3 R4-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
SEM84601540E	R0.75	1.5	4	1.5	40	80	1.45
SEM84601604E	R0.8	1.6	4	1.6	4	50	1.55
SEM84601606E	R0.8	1.6	4	1.6	6	50	1.55
★ SEM84601608E	R0.8	1.6	4	1.6	8	50	1.55
SEM84601610E	R0.8	1.6	4	1.6	10	50	1.55
★ SEM84601612E	R0.8	1.6	4	1.6	12	50	1.55
★ SEM84601616E	R0.8	1.6	4	1.6	16	50	1.55
SEM84601620E	R0.8	1.6	4	1.6	20	50	1.55
★ SEM84601804E	R0.9	1.8	4	1.8	4	50	1.75
SEM84601806E	R0.9	1.8	4	1.8	6	50	1.75
★ SEM84601808E	R0.9	1.8	4	1.8	8	50	1.75
SEM84601810E	R0.9	1.8	4	1.8	10	50	1.75
★ SEM84601812E	R0.9	1.8	4	1.8	12	50	1.75
★ SEM84601816E	R0.9	1.8	4	1.8	16	50	1.75
SEM84601820E	R0.9	1.8	4	1.8	20	50	1.75
★ SEM84602004E	R1.0	2.0	4	2	4	50	1.95
★ SEM84602006E	R1.0	2.0	4	2	6	50	1.95
★ SEM84602008E	R1.0	2.0	4	2	8	50	1.95
★ SEM84602010E	R1.0	2.0	4	2	10	50	1.95
★ SEM84602012E	R1.0	2.0	4	2	12	50	1.95
★ SEM84602014E	R1.0	2.0	4	2	14	50	1.95
★ SEM84602016E	R1.0	2.0	4	2	16	50	1.95
★ SEM84602018E	R1.0	2.0	4	2	18	50	1.95
★ SEM84602020E	R1.0	2.0	4	2	20	50	1.95

★ : Stock Item

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○		

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	○	○

YG 4G MILL END MILLS

PLAIN SHANK


SEM846 SERIES

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- **VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETL**
- **Fraise carbure, 2 dents, hémisphérique, détalonnée**
- **MD, 2 TAGLIANTI, SEMISFERICA, SCARICATA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRc55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE
2
30°
R ±0.005
R ±0.010
PLAIN
P.278-289

R0.05-R3 R4-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
SEM84602022E	R1.0	2.0	4	2	22	60	1.95
★ SEM84602026E	R1.0	2.0	4	2	26	60	1.95
★ SEM84602030E	R1.0	2.0	4	2	30	70	1.95
★ SEM84602035E	R1.0	2.0	4	2	35	70	1.95
SEM84602040E	R1.0	2.0	4	2	40	80	1.95
SEM84602045E	R1.0	2.0	4	2	45	90	1.95
SEM84602050E	R1.0	2.0	4	2	50	100	1.95
SEM84602060E	R1.0	2.0	4	2	60	110	1.95
★ SEM84602508E	R1.25	2.5	4	2.5	8	50	2.40
★ SEM84602510E	R1.25	2.5	4	2.5	10	50	2.40
★ SEM84602512E	R1.25	2.5	4	2.5	12	50	2.40
★ SEM84602516E	R1.25	2.5	4	2.5	16	50	2.40
★ SEM84602520E	R1.25	2.5	4	2.5	20	50	2.40
SEM84602522E	R1.25	2.5	4	2.5	22	60	2.40
SEM84602526E	R1.25	2.5	4	2.5	26	60	2.40
SEM84602530E	R1.25	2.5	4	2.5	30	70	2.40
SEM84602535E	R1.25	2.5	4	2.5	35	70	2.40
SEM84602540E	R1.25	2.5	4	2.5	40	80	2.40
SEM84602545E	R1.25	2.5	4	2.5	45	90	2.40
SEM84602550E	R1.25	2.5	4	2.5	50	100	2.40
★ SEM84603006E	R1.5	3.0	6	3	6	50	2.85
★ SEM84603008E	R1.5	3.0	6	3	8	50	2.85
★ SEM84603010E	R1.5	3.0	6	3	10	50	2.85
★ SEM84603012E	R1.5	3.0	6	3	12	50	2.85

★ : Stock Item

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	◎	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- **VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETL**
- () **Fraise carbure, 2 dents, hémisphérique, détalonnée**
- () **MD, 2 TAGLIENTI, SEMISFERICA, SCARICATA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE 2 30° ±0.005 ±0.010 PLAIN P.278-289

R0.05-R3 R4-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
★ SEM84603014E	R1.5	3.0	6	3	14	60	2.85
SEM84603015E	R1.5	3.0	6	3	15	60	2.85
★ SEM84603016E	R1.5	3.0	6	3	16	60	2.85
★ SEM84603018E	R1.5	3.0	6	3	18	60	2.85
★ SEM84603020E	R1.5	3.0	6	3	20	60	2.85
★ SEM84603022E	R1.5	3.0	6	3	22	65	2.85
★ SEM84603026E	R1.5	3.0	6	3	26	65	2.85
★ SEM84603030E	R1.5	3.0	6	3	30	70	2.85
★ SEM84603035E	R1.5	3.0	6	3	35	70	2.85
★ SEM84603040E	R1.5	3.0	6	3	40	80	2.85
★ SEM84603045E	R1.5	3.0	6	3	45	90	2.85
★ SEM84603050E	R1.5	3.0	6	3	50	100	2.85
SEM84603060E	R1.5	3.0	6	3	60	100	2.85
★ SEM84604008E	R2.0	4.0	6	4	8	50	3.85
★ SEM84604010E	R2.0	4.0	6	4	10	50	3.85
★ SEM84604012E	R2.0	4.0	6	4	12	50	3.85
★ SEM84604014E	R2.0	4.0	6	4	14	60	3.85
★ SEM84604016E	R2.0	4.0	6	4	16	60	3.85
★ SEM84604018E	R2.0	4.0	6	4	18	60	3.85
★ SEM84604020E	R2.0	4.0	6	4	20	60	3.85
★ SEM84604022E	R2.0	4.0	6	4	22	65	3.85
★ SEM84604026E	R2.0	4.0	6	4	26	65	3.85
★ SEM84604030E	R2.0	4.0	6	4	30	70	3.85
★ SEM84604035E	R2.0	4.0	6	4	35	70	3.85

★ : Stock Item

▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○


YG 4G MILL END MILLS

PLAIN SHANK **SEM846** SERIES

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- **VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETL**
- **Fraise carbure, 2 dents, hémisphérique, détalonnée**
- **MD, 2 TAGLIANTI, SEMISFERICA, SCARICATA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRc55, welche im Werkzeug- und Formenbau Verwendung finden.

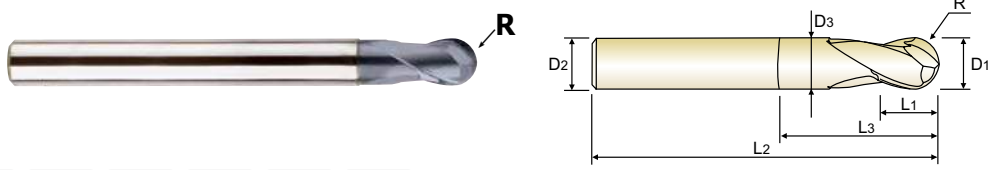

CARBIDE
2
30°
R ±0.005
R ±0.010
PLAIN
P.278-289

R0.05-R3 R4-R6

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
★ SEM84604040E	R2.0	4.0	6	4	40	80	3.85
SEM84604045E	R2.0	4.0	6	4	45	90	3.85
★ SEM84604050E	R2.0	4.0	6	4	50	100	3.85
SEM84604055E	R2.0	4.0	6	4	55	100	3.85
SEM84604060E	R2.0	4.0	6	4	60	100	3.85
SEM84605015E	R2.5	5.0	6	6	15	60	4.85
★ SEM84605020E	R2.5	5.0	6	6	20	60	4.85
★ SEM84605026E	R2.5	5.0	6	6	26	65	4.85
★ SEM84605030E	R2.5	5.0	6	6	30	70	4.85
★ SEM84605035E	R2.5	5.0	6	6	35	70	4.85
★ SEM84605040E	R2.5	5.0	6	6	40	80	4.85
SEM84605045E	R2.5	5.0	6	6	45	90	4.85
★ SEM84605050E	R2.5	5.0	6	6	50	100	4.85
SEM84605055E	R2.5	5.0	6	6	55	100	4.85
SEM84605060E	R2.5	5.0	6	6	60	100	4.85
★ SEM84606020E	R3.0	6.0	6	8	20	60	5.85
★ SEM84606030E	R3.0	6.0	6	8	30	60	5.85
★ SEM84606020090E	R3.0	6.0	6	12	20	90	5.85
★ SEM84606030090E	R3.0	6.0	6	12	30	90	5.85
★ SEM84608025E	R4.0	8.0	8	10	25	70	7.70
★ SEM84608035E	R4.0	8.0	8	10	35	70	7.70
SEM84608025100E	R4.0	8.0	8	14	25	100	7.70
★ SEM84608035100E	R4.0	8.0	8	14	35	100	7.70
★ SEM84610030E	R5.0	10.0	10	12	30	75	9.70

★ : Stock Item ▶ NEXT PAGE

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO Material Description	P										M				K								
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	◎	◎	○	◎	○	○	○	○			
ISO Material Description	N										S							H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommend											○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit LANG ABGESETZTEM SCHAFTTETL
- Fraise carbure, 2 dents, hémisphérique, détalonnée
- MD, 2 TAGLIENTI, SEMISFERICA, SCARICATA

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.

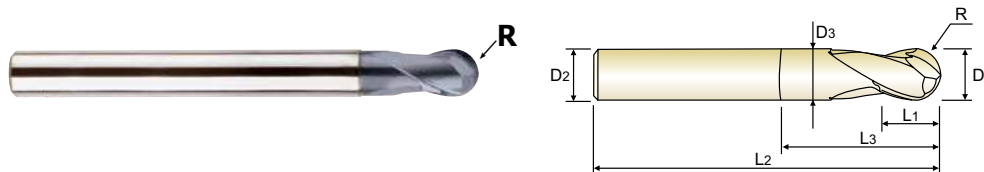

CARBIDE
2
30°
R ±0.005
R ±0.010
PLAIN
P.278-289

R0.05-R3 R4-R6

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
★ SEM84610040E	R5.0	10.0	10	12	40	75	9.70
★ SEM84610030100E	R5.0	10.0	10	18	30	100	9.70
★ SEM84610040100E	R5.0	10.0	10	18	40	100	9.70
★ SEM84612032E	R6.0	12.0	12	14	32	80	11.70
SEM84612045E	R6.0	12.0	12	14	45	80	11.70
★ SEM84612032110E	R6.0	12.0	12	22	32	110	11.70
★ SEM84612045110E	R6.0	12.0	12	22	45	110	11.70

★ : Stock Item

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	19	25	28	32	10	29	32	38	10	35	15	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	◎	◎	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○

YG 4G MILL END MILLS

PLAIN SHANK


SEM846 SERIES

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK (6mm shank)

- **VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit ABGESETZTEM SCHAFTTETL (6mm ZYLINDERSCHAFT)**
- **Fraise carbure, 2 dents, hémisphérique, détalonnée (Ø queue 6mm)**
- **MD, 2 TAGLIANTI, SEMISFERICA, SCARICATA (gambo 6mm)**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRc55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE
2
30°
±0.005
PLAIN
P.278-289

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
SEM846005016SE	R0.25	0.5	6	0.5	1	45	0.45
SEM846005026SE	R0.25	0.5	6	0.5	2	45	0.45
SEM846005046SE	R0.25	0.5	6	0.5	4	45	0.45
SEM846006016SE	R0.3	0.6	6	0.6	1	45	0.55
SEM846006026SE	R0.3	0.6	6	0.6	2	45	0.55
SEM846006036SE	R0.3	0.6	6	0.6	3	45	0.55
SEM846006046SE	R0.3	0.6	6	0.6	4	45	0.55
SEM846006056SE	R0.3	0.6	6	0.6	5	45	0.55
★ SEM846006066SE	R0.3	0.6	6	0.6	6	45	0.55
SEM846006086SE	R0.3	0.6	6	0.6	8	45	0.55
SEM846006106SE	R0.3	0.6	6	0.6	10	45	0.55
SEM846006126SE	R0.3	0.6	6	0.6	12	45	0.55
SEM846006146SE	R0.3	0.6	6	0.6	14	45	0.55
SEM846006166SE	R0.3	0.6	6	0.6	16	45	0.55
SEM846008016SE	R0.4	0.8	6	0.8	1	45	0.75
SEM846008026SE	R0.4	0.8	6	0.8	2	45	0.75
SEM846008036SE	R0.4	0.8	6	0.8	3	45	0.75
SEM846008046SE	R0.4	0.8	6	0.8	4	45	0.75
SEM846008056SE	R0.4	0.8	6	0.8	5	45	0.75
SEM846008066SE	R0.4	0.8	6	0.8	6	45	0.75
SEM846008086SE	R0.4	0.8	6	0.8	8	45	0.75
SEM846008106SE	R0.4	0.8	6	0.8	10	45	0.75
SEM846008126SE	R0.4	0.8	6	0.8	12	45	0.75
SEM846008146SE	R0.4	0.8	6	0.8	14	45	0.75

★ : Stock Item

▶ NEXT PAGE

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.005	0 ~ - 0.012	h5

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○	○	◎	◎	○

CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK (6mm shank)

- VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit ABGESETZTEM SCHAFTTETL (6mm ZYLINDERSCHAFT)
- Fraise carbure, 2 dents, hémisphérique, détalonnée (Ø queue 6mm)
- MD, 2 TAGLIENTI, SEMISFERICA, SCARICATA (gambo 6mm)

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE 2 30° ±0.005 PLAIN P.278-289

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
SEM846008166SE	R0.4	0.8	6	0.8	16	45	0.75
SEM846008206SE	R0.4	0.8	6	0.8	20	45	0.75
SEM846010026SE	R0.5	1.0	6	1	2	50	0.95
SEM846010036SE	R0.5	1.0	6	1	3	50	0.95
★ SEM846010046SE	R0.5	1.0	6	1	4	50	0.95
SEM846010056SE	R0.5	1.0	6	1	5	50	0.95
★ SEM846010066SE	R0.5	1.0	6	1	6	50	0.95
SEM846010076SE	R0.5	1.0	6	1	7	50	0.95
SEM846010086SE	R0.5	1.0	6	1	8	50	0.95
SEM846010096SE	R0.5	1.0	6	1	9	50	0.95
★ SEM846010106SE	R0.5	1.0	6	1	10	50	0.95
SEM846010126SE	R0.5	1.0	6	1	12	50	0.95
SEM846010146SE	R0.5	1.0	6	1	14	50	0.95
SEM846010166SE	R0.5	1.0	6	1	16	50	0.95
SEM846010186SE	R0.5	1.0	6	1	18	50	0.95
SEM846010206SE	R0.5	1.0	6	1	20	50	0.95
SEM846010226SE	R0.5	1.0	6	1	22	60	0.95
SEM846010266SE	R0.5	1.0	6	1	26	60	0.95
SEM846010306SE	R0.5	1.0	6	1	30	70	0.95
SEM846015036SE	R0.75	1.5	6	1.5	3	50	1.45
SEM846015046SE	R0.75	1.5	6	1.5	4	50	1.45
★ SEM846015066SE	R0.75	1.5	6	1.5	6	50	1.45
★ SEM846015086SE	R0.75	1.5	6	1.5	8	50	1.45
★ SEM846015106SE	R0.75	1.5	6	1.5	10	50	1.45

★ : Stock Item


▶ NEXT PAGE

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.005	0 ~ - 0.012	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○




CARBIDE, 2 FLUTE BALL NOSE with EXTENDED NECK (6mm shank)

- **VOLLHARTMETALL, 2 SCHNEIDEN STIRNRADIUS mit ABGESETZTEM SCHAFTTETL (6mm ZYLINDERSCHAFT)**
- **Fraise carbure, 2 dents, hémisphérique, détalonnée (Ø queue 6mm)**
- **MD, 2 TAGLIENTI, SEMISFERICA, SCARICATA (gambo 6mm)**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ With its unique ball nose geometry and cutting edges the cutting force has decreased, also increasing wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRc55 which are used for molds & dies.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit.
- ▶ Aufgrund der einzigartigen Kugelgeometrie und Schneidkantenpräparation wird die Schnittkraft reduziert und die Verschleißfestigkeit erhöht.
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRc55, welche im Werkzeug- und Formenbau Verwendung finden.



CARBIDE 2 30° ±0.005 PLAIN P.278-289

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
★ SEM846015126SE	R0.75	1.5	6	1.5	12	50	1.45
SEM846015146SE	R0.75	1.5	6	1.5	14	50	1.45
SEM846015166SE	R0.75	1.5	6	1.5	16	50	1.45
SEM846015186SE	R0.75	1.5	6	1.5	18	50	1.45
SEM846015206SE	R0.75	1.5	6	1.5	20	50	1.45
SEM846015226SE	R0.75	1.5	6	1.5	22	60	1.45
SEM846015266SE	R0.75	1.5	6	1.5	26	60	1.45
SEM846015306SE	R0.75	1.5	6	1.5	30	70	1.45
SEM846015356SE	R0.75	1.5	6	1.5	35	70	1.45
SEM846015406SE	R0.75	1.5	6	1.5	40	80	1.45
SEM846020046SE	R1.0	2.0	6	2	4	50	1.95
★ SEM846020066SE	R1.0	2.0	6	2	6	50	1.95
★ SEM846020086SE	R1.0	2.0	6	2	8	50	1.95
★ SEM846020106SE	R1.0	2.0	6	2	10	50	1.95
★ SEM846020126SE	R1.0	2.0	6	2	12	50	1.95
SEM846020146SE	R1.0	2.0	6	2	14	50	1.95
★ SEM846020166SE	R1.0	2.0	6	2	16	50	1.95
SEM846020186SE	R1.0	2.0	6	2	18	50	1.95
★ SEM846020206SE	R1.0	2.0	6	2	20	50	1.95
SEM846020226SE	R1.0	2.0	6	2	22	60	1.95
SEM846020266SE	R1.0	2.0	6	2	26	60	1.95
SEM846020306SE	R1.0	2.0	6	2	30	70	1.95
SEM846020356SE	R1.0	2.0	6	2	35	70	1.95
SEM846020406SE	R1.0	2.0	6	2	40	80	1.95
SEM846020456SE	R1.0	2.0	6	2	45	90	1.95
SEM846020506SE	R1.0	2.0	6	2	50	100	1.95

★ : Stock Item

Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.005	0 ~ - 0.012	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	○	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○	○	◎	◎	○

YG 4G MILL END MILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER


SEM846 SERIES


2 FLUTE BALL NOSE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)															
				0.1		0.1		0.1		0.1		0.2		0.2		0.2		0.3	
				LBS	0.2	0.3	0.5	1	0.5	1	1.5	2	3	1	1.5	2	2.5	3	4
P	1-5	Non-alloy steel	Vc	16	16	16	14	31	31	28	28	28	28	47	47	42	42	42	38
			fz	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.005	0.005	0.004	0.004	0.004	0.004
			RPM	50930	50930	50930	44563	49338	49338	44563	44563	44563	49869	49869	44563	44563	44563	40319	40319
	6-8	Low alloy steel	FEED	204	204	204	178	296	296	267	267	267	499	499	357	357	357	323	
			Ap	0.009	0.009	0.006	0.002	0.018	0.013	0.007	0.005	0.003	0.019	0.019	0.011	0.007	0.007	0.007	0.004
			Vc	16	16	16	14	31	31	28	28	28	28	47	47	42	42	42	38
	9	Low alloy steel	fz	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.005	0.005	0.004	0.004	0.004	0.004	
			RPM	50930	50930	50930	44563	49338	49338	44563	44563	44563	49869	49869	44563	44563	44563	40319	40319
			FEED	204	204	204	178	296	296	267	267	267	499	499	357	357	357	323	323
	10-11.1	High alloyed steel, and tool steel	Ap	0.007	0.007	0.005	0.002	0.014	0.01	0.006	0.004	0.003	0.015	0.015	0.008	0.005	0.005	0.003	0.003
			Vc	16	16	16	14	31	31	28	28	28	28	47	47	42	42	42	38
			fz	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.005	0.005	0.004	0.004	0.004	0.004	0.004
11.2	High alloyed steel, and tool steel	RPM	50930	50930	50930	44563	49338	49338	44563	44563	44563	49869	49869	44563	44563	44563	40319	40319	
		FEED	204	204	204	178	296	296	267	267	267	499	499	357	357	357	323	323	
		Ap	0.009	0.009	0.006	0.002	0.018	0.013	0.007	0.005	0.003	0.019	0.019	0.011	0.007	0.007	0.007	0.004	
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	Vc	16	16	16	14	31	31	28	28	28	47	47	42	42	42	38	
			fz	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.005	0.005	0.004	0.004	0.004	0.004	0.004
			RPM	50930	50930	50930	44563	49338	49338	44563	44563	44563	49869	49869	44563	44563	44563	40319	40319
H	38.1 - 38.2	Hardened steel	FEED	204	204	204	178	296	296	267	267	267	499	499	357	357	357	323	
			Ap	0.009	0.009	0.006	0.002	0.018	0.013	0.007	0.005	0.003	0.019	0.019	0.011	0.007	0.007	0.007	0.004
			Vc	16	16	16	14	31	31	28	28	28	28	47	47	42	42	42	38
40	Chilled Cast Iron	fz	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.004	0.004	0.004	0.004	0.004	0.004	0.003	
		RPM	50930	50930	50930	44563	49338	49338	44563	44563	44563	49869	49869	44563	44563	44563	40319	40319	
		FEED	204	204	204	178	296	296	267	267	267	499	499	357	357	357	323	323	
41	Hardened Cast Iron	Ap	0.007	0.007	0.005	0.002	0.014	0.01	0.006	0.004	0.003	0.015	0.015	0.008	0.005	0.005	0.003	0.003	
		Vc	16	16	16	14	31	31	28	28	28	28	47	47	42	42	42	38	
		fz	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.004	0.004	0.004	0.004	0.004	0.004	0.003	
ROUTERS	CRX S END MILLS	K-2 END MILLS	RPM	50930	50930	50930	44563	42972	42972	38197	38197	38197	42441	38197	38197	38197	33953	33953	
			FEED	204	204	204	178	258	258	229	229	229	340	340	306	306	306	204	204
			Ap	0.005	0.005	0.004	0.001	0.01	0.007	0.004	0.003	0.002	0.011	0.011	0.006	0.004	0.004	0.004	0.002
GENERAL HSS END MILLS	MILLING CUTTERS	TECHNICAL DATA	Vc	16	16	16	14	27	27	24	24	24	40	40	36	36	36	32	
			fz	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.004	0.004	0.004	0.004	0.004	0.004	0.003
			RPM	50930	50930	50930	44563	42972	42972	38197	38197	38197	42441	42441	38197	38197	38197	38197	33953
TANK-POWER END MILLS	GENERAL HSS END MILLS	MILLING CUTTERS	FEED	204	204	204	178	258	258	229	229	229	340	340	306	306	306	204	
			Ap	0.005	0.005	0.004	0.001	0.01	0.007	0.004	0.003	0.002	0.011	0.011	0.006	0.004	0.004	0.004	0.002
			Vc	16	16	16	14	27	27	24	24	24	40	40	36	36	36	32	32

▶ NEXT PAGE

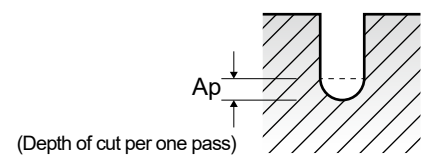



4G MILL END MILLS


RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

SEM846 SERIES 2 FLUTE BALL NOSE - **SLOTING**

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

VDI 3323	Parameter	Diameter (∅)																			
		1.2 LBS	1.2 4	1.2 6	1.2 8	1.2 10	1.2 12	1.2 16	1.2 20	1.2 26	1.4 6	1.4 8	1.4 10	1.4 16	1.5 4	1.5 5	1.5 6	1.5 7	1.5 8	1.5 10	1.5 12
1-5	Vc	99	99	89	89	89	79	59	30	95	85	85	76	113	113	113	113	101	101	101	101
	fz	0.026	0.026	0.024	0.024	0.024	0.021	0.018	0.016	0.03	0.027	0.027	0.024	0.033	0.033	0.033	0.033	0.03	0.03	0.03	0.03
	RPM	26261	26261	23608	23608	23608	20955	15650	7958	21600	19326	19326	17280	23979	23979	23979	23979	21433	21433	21433	21433
	FEED	1366	1366	1133	1133	1133	880	563	255	1296	1044	1044	829	1583	1583	1583	1583	1286	1286	1286	1286
	Ap	0.076	0.076	0.043	0.027	0.027	0.016	0.011	0.011	0.088	0.05	0.05	0.032	0.135	0.095	0.095	0.095	0.054	0.054	0.054	0.034

▶ NEXT PAGE

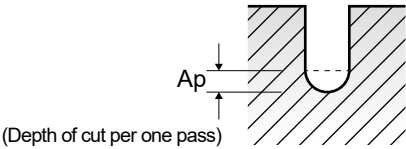



4G MILL END MILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER


SEM846 SERIES

2 FLUTE BALL NOSE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

Table with columns for ISO, VDI 3323, Parameter, Diameter (Ø) (1.5, 1.5, 1.5, 1.5, 1.5, 1.5, 1.5, 1.5, 1.5, 1.5, 1.6, 1.6, 1.6, 1.6, 1.6, 1.6, 1.6, 1.8, 1.8), LBS (16, 18, 20, 22, 26, 30, 35, 40, 4, 6, 8, 10, 12, 16, 20, 4, 6), and rows for ISO P (1-5, 6-8, 9, 10-11, 11.2) and ISO K (15-20), and ISO H (38.1-38.2, 40, 41). Parameters include Vc, fz, RPM, FEED, and Ap.

▶ NEXT PAGE



(Depth of cut per one pass)

YG 4G MILL END MILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER


SEM846 SERIES

2 FLUTE BALL NOSE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

ISO	VDI 3323	Parameter	Diameter (Ø)																
			2.0	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	3.0	3.0	3.0	3.0
			LBS	60	8	10	12	16	20	22	26	30	35	40	45	50	6	8	10
P	1-5	Vc	34	124	124	124	112	112	112	99	99	99	74	74	74	129	129	129	129
		fz	0.03	0.061	0.061	0.061	0.055	0.055	0.055	0.049	0.049	0.049	0.043	0.043	0.043	0.075	0.075	0.075	0.075
		RPM	5411	15788	15788	15788	14260	14260	14260	12605	12605	12605	9422	9422	9422	13687	13687	13687	13687
		FEED	325	1926	1926	1926	1569	1569	1569	1235	1235	1235	810	810	810	2053	2053	2053	2053
	6-8	Ap	0.018	0.158	0.158	0.158	0.09	0.09	0.056	0.056	0.056	0.034	0.034	0.023	0.023	0.27	0.27	0.189	0.189
		Vc	34	124	124	124	112	112	112	99	99	99	74	74	74	129	129	129	129
		fz	0.03	0.061	0.061	0.061	0.055	0.055	0.055	0.049	0.049	0.049	0.043	0.043	0.043	0.075	0.075	0.075	0.075
		RPM	5411	15788	15788	15788	14260	14260	14260	12605	12605	12605	9422	9422	9422	13687	13687	13687	13687
	9	FEED	325	1926	1926	1926	1569	1569	1569	1235	1235	1235	810	810	810	2053	2053	2053	2053
		Ap	0.018	0.158	0.158	0.158	0.09	0.09	0.056	0.056	0.056	0.034	0.034	0.023	0.023	0.27	0.27	0.189	0.189
		Vc	32	117	117	117	105	105	105	94	94	94	70	70	70	122	122	122	122
		fz	0.027	0.054	0.054	0.054	0.048	0.048	0.048	0.043	0.043	0.043	0.038	0.038	0.038	0.067	0.067	0.067	0.067
10-11.1	RPM	5093	14897	14897	14897	13369	13369	13369	11968	11968	11968	8913	8913	8913	12945	12945	12945	12945	
	FEED	275	1609	1609	1609	1283	1283	1283	1029	1029	1029	677	677	677	1735	1735	1735	1735	
	Ap	0.014	0.123	0.123	0.123	0.07	0.07	0.044	0.044	0.044	0.026	0.026	0.018	0.018	0.21	0.21	0.147	0.147	
	Vc	34	124	124	124	112	112	112	99	99	99	74	74	74	129	129	129	129	
11.2	fz	0.03	0.061	0.061	0.061	0.055	0.055	0.055	0.049	0.049	0.049	0.043	0.043	0.043	0.075	0.075	0.075	0.075	
	RPM	5411	15788	15788	15788	14260	14260	14260	12605	12605	12605	9422	9422	9422	13687	13687	13687	13687	
	FEED	325	1926	1926	1926	1569	1569	1569	1235	1235	1235	810	810	810	2053	2053	2053	2053	
	Ap	0.018	0.158	0.158	0.158	0.09	0.09	0.056	0.056	0.056	0.034	0.034	0.023	0.023	0.27	0.27	0.189	0.189	
K	15-20	Vc	32	117	117	117	105	105	105	94	94	94	70	70	70	122	122	122	122
		fz	0.027	0.054	0.054	0.054	0.048	0.048	0.048	0.043	0.043	0.043	0.038	0.038	0.038	0.067	0.067	0.067	0.067
		RPM	5093	14897	14897	14897	13369	13369	13369	11968	11968	11968	8913	8913	8913	12945	12945	12945	12945
		FEED	275	1609	1609	1609	1283	1283	1283	1029	1029	1029	677	677	677	1735	1735	1735	1735
H	38.1 - 38.2	Ap	0.014	0.123	0.123	0.123	0.07	0.07	0.044	0.044	0.044	0.026	0.026	0.018	0.018	0.21	0.21	0.147	0.147
		Vc	28	104	104	104	93	93	93	83	83	83	62	62	62	107	107	107	107
		fz	0.026	0.049	0.049	0.049	0.044	0.044	0.044	0.04	0.04	0.04	0.035	0.035	0.035	0.063	0.063	0.063	0.063
		RPM	4456	13242	13242	13242	11841	11841	11841	10568	10568	10568	7894	7894	7894	11353	11353	11353	11353
40	FEED	232	1298	1298	1298	1042	1042	1042	845	845	845	553	553	553	1430	1430	1430	1430	
	Ap	0.01	0.088	0.088	0.088	0.05	0.05	0.031	0.031	0.031	0.019	0.019	0.013	0.013	0.15	0.15	0.105	0.105	
	Vc	32	117	117	117	105	105	105	94	94	94	70	70	70	122	122	122	122	
	fz	0.027	0.054	0.054	0.054	0.048	0.048	0.048	0.043	0.043	0.043	0.038	0.038	0.038	0.067	0.067	0.067	0.067	
41	RPM	5093	14897	14897	14897	13369	13369	13369	11968	11968	11968	8913	8913	8913	12945	12945	12945	12945	
	FEED	275	1609	1609	1609	1283	1283	1283	1029	1029	1029	677	677	677	1735	1735	1735	1735	
	Ap	0.014	0.123	0.123	0.123	0.07	0.07	0.044	0.044	0.044	0.026	0.026	0.018	0.018	0.21	0.21	0.147	0.147	
	Vc	28	104	104	104	93	93	93	83	83	83	62	62	62	107	107	107	107	
ROUTERS		fz	0.026	0.049	0.049	0.049	0.044	0.044	0.044	0.04	0.04	0.04	0.035	0.035	0.035	0.063	0.063	0.063	0.063
		RPM	4456	13242	13242	13242	11841	11841	11841	10568	10568	10568	7894	7894	7894	11353	11353	11353	11353
		FEED	232	1298	1298	1298	1042	1042	1042	845	845	845	553	553	553	1430	1430	1430	1430
		Ap	0.01	0.088	0.088	0.088	0.05	0.05	0.031	0.031	0.031	0.019	0.019	0.013	0.013	0.15	0.15	0.105	0.105

▶ NEXT PAGE

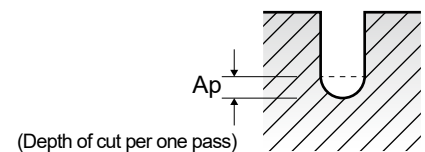


SEM846 SERIES

2 FLUTE BALL NOSE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

ISO	VDI 3323	Parameter	Diameter (Ø)											
			4.0	4.0	4.0	4.0	4.0	4.0	4.0	5.0	5.0	5.0	5.0	
			LBS	26	30	35	40	45	50	60	15	20	26	30
P	1-5	Vc	111	111	111	111	99	99	99	121	121	109	109	
		fz	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.12	0.12	0.108	0.108	
		RPM	8833	8833	8833	8833	7878	7878	7878	7703	7703	6939	6939	
		FEED	1590	1590	1590	1590	1261	1261	1261	1849	1849	1499	1499	
		Ap	0.144	0.144	0.09	0.09	0.09	0.09	0.054	0.315	0.315	0.18	0.18	
	6-8	Vc	111	111	111	111	99	99	99	121	121	109	109	
		fz	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.12	0.12	0.108	0.108	
		RPM	8833	8833	8833	8833	7878	7878	7878	7703	7703	6939	6939	
		FEED	1590	1590	1590	1590	1261	1261	1261	1849	1849	1499	1499	
		Ap	0.144	0.144	0.09	0.09	0.09	0.09	0.054	0.315	0.315	0.18	0.18	
	9	Vc	105	105	105	105	93	93	93	115	115	103	103	
		fz	0.081	0.081	0.081	0.081	0.072	0.072	0.072	0.1	0.1	0.09	0.09	
		RPM	8356	8356	8356	8356	7401	7401	7401	7321	7321	6557	6557	
		FEED	1354	1354	1354	1354	1066	1066	1066	1464	1464	1180	1180	
		Ap	0.112	0.112	0.07	0.07	0.07	0.07	0.042	0.245	0.245	0.14	0.14	
	10-11.1	Vc	111	111	111	111	99	99	99	121	121	109	109	
		fz	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.12	0.12	0.108	0.108	
		RPM	8833	8833	8833	8833	7878	7878	7878	7703	7703	6939	6939	
		FEED	1590	1590	1590	1590	1261	1261	1261	1849	1849	1499	1499	
		Ap	0.144	0.144	0.09	0.09	0.09	0.09	0.054	0.315	0.315	0.18	0.18	
11.2	Vc	105	105	105	105	93	93	93	115	115	103	103		
	fz	0.081	0.081	0.081	0.081	0.072	0.072	0.072	0.1	0.1	0.09	0.09		
	RPM	8356	8356	8356	8356	7401	7401	7401	7321	7321	6557	6557		
	FEED	1354	1354	1354	1354	1066	1066	1066	1464	1464	1180	1180		
	Ap	0.112	0.112	0.07	0.07	0.07	0.07	0.042	0.245	0.245	0.14	0.14		
K 15-20	Vc	111	111	111	111	99	99	99	121	121	109	109		
	fz	0.09	0.09	0.09	0.09	0.08	0.08	0.08	0.12	0.12	0.108	0.108		
	RPM	8833	8833	8833	8833	7878	7878	7878	7703	7703	6939	6939		
	FEED	1590	1590	1590	1590	1261	1261	1261	1849	1849	1499	1499		
	Ap	0.144	0.144	0.09	0.09	0.09	0.09	0.054	0.315	0.315	0.18	0.18		
H	38.1 - 38.2	Vc	93	93	93	93	82	82	82	101	101	90	90	
		fz	0.077	0.077	0.077	0.077	0.068	0.068	0.068	0.1	0.1	0.09	0.09	
		RPM	7401	7401	7401	7401	6525	6525	6525	6430	6430	5730	5730	
		FEED	1140	1140	1140	1140	887	887	887	1286	1286	1031	1031	
		Ap	0.08	0.08	0.05	0.05	0.05	0.05	0.03	0.175	0.175	0.1	0.1	
	40	Vc	105	105	105	105	93	93	93	115	115	103	103	
		fz	0.081	0.081	0.081	0.081	0.072	0.072	0.072	0.1	0.1	0.09	0.09	
		RPM	8356	8356	8356	8356	7401	7401	7401	7321	7321	6557	6557	
		FEED	1354	1354	1354	1354	1066	1066	1066	1464	1464	1180	1180	
		Ap	0.112	0.112	0.07	0.07	0.07	0.07	0.042	0.245	0.245	0.14	0.14	
41	Vc	93	93	93	93	82	82	82	101	101	90	90		
	fz	0.077	0.077	0.077	0.077	0.068	0.068	0.068	0.1	0.1	0.09	0.09		
	RPM	7401	7401	7401	7401	6525	6525	6525	6430	6430	5730	5730		
	FEED	1140	1140	1140	1140	887	887	887	1286	1286	1031	1031		
	Ap	0.08	0.08	0.05	0.05	0.05	0.05	0.03	0.175	0.175	0.1	0.1		

▶ NEXT PAGE

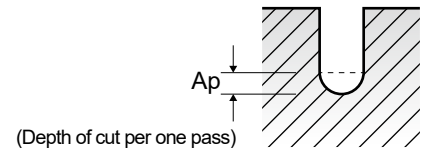


YG 4G MILL END MILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

SEM846 SERIES 2 FLUTE BALL NOSE - SLOTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ap = mm LBS = Length Below Shank

VDI 3323	Parameter	Diameter (Ø)													
		5.0	5.0	5.0	5.0	6.0	6.0	8.0	8.0	10.0	10.0	12.0	12.0	12.0	
	LBS	35	40	50	60	20	30	25	30	30	40	32	45	50	
1-5	Vc	109	109	109	97	123	123	122	122	121	121	121	121	100	
	fz	0.108	0.108	0.108	0.096	0.146	0.146	0.186	0.186	0.214	0.214	0.238	0.238	0.151	
	RPM	6939	6939	6939	6175	6525	6525	4854	4854	3852	3852	3210	3210	2653	
	FEED	1499	1499	1499	1186	1905	1905	1806	1806	1648	1648	1528	1528	801	
	Ap	0.18	0.18	0.113	0.113	0.378	0.378	0.504	0.504	0.9	0.63	1.08	0.756	0.756	
6-8	Vc	109	109	109	97	123	123	122	122	121	121	121	121	100	
	fz	0.108	0.108	0.108	0.096	0.146	0.146	0.186	0.186	0.214	0.214	0.238	0.238	0.151	
	RPM	6939	6939	6939	6175	6525	6525	4854	4854	3852	3852	3210	3210	2653	
	FEED	1499	1499	1499	1186	1905	1905	1806	1806	1648	1648	1528	1528	801	
	Ap	0.18	0.18	0.113	0.113	0.378	0.378	0.504	0.504	0.9	0.63	1.08	0.756	0.756	
9	Vc	103	103	103	92	117	117	116	116	116	116	115	115	95	
	fz	0.09	0.09	0.09	0.08	0.129	0.129	0.163	0.163	0.19	0.19	0.213	0.213	0.119	
	RPM	6557	6557	6557	5857	6207	6207	4615	4615	3692	3692	3050	3050	2520	
	FEED	1180	1180	1180	937	1601	1601	1505	1505	1403	1403	1300	1300	600	
	Ap	0.14	0.14	0.088	0.088	0.294	0.294	0.392	0.392	0.7	0.49	0.84	0.588	0.588	
10 - 11.1	Vc	109	109	109	97	123	123	122	122	121	121	121	121	100	
	fz	0.108	0.108	0.108	0.096	0.146	0.146	0.186	0.186	0.214	0.214	0.238	0.238	0.151	
	RPM	6939	6939	6939	6175	6525	6525	4854	4854	3852	3852	3210	3210	2653	
	FEED	1499	1499	1499	1186	1905	1905	1806	1806	1648	1648	1528	1528	801	
	Ap	0.18	0.18	0.113	0.113	0.378	0.378	0.504	0.504	0.9	0.63	1.08	0.756	0.756	
11.2	Vc	103	103	103	92	117	117	116	116	116	116	115	115	95	
	fz	0.09	0.09	0.09	0.08	0.129	0.129	0.163	0.163	0.19	0.19	0.213	0.213	0.119	
	RPM	6557	6557	6557	5857	6207	6207	4615	4615	3692	3692	3050	3050	2520	
	FEED	1180	1180	1180	937	1601	1601	1505	1505	1403	1403	1300	1300	600	
	Ap	0.14	0.14	0.088	0.088	0.294	0.294	0.392	0.392	0.7	0.49	0.84	0.588	0.588	
15 - 20	Vc	109	109	109	97	123	123	122	122	121	121	121	121	100	
	fz	0.108	0.108	0.108	0.096	0.146	0.146	0.186	0.186	0.214	0.214	0.238	0.238	0.151	
	RPM	6939	6939	6939	6175	6525	6525	4854	4854	3852	3852	3210	3210	2653	
	FEED	1499	1499	1499	1186	1905	1905	1806	1806	1648	1648	1528	1528	801	
	Ap	0.18	0.18	0.113	0.113	0.378	0.378	0.504	0.504	0.9	0.63	1.08	0.756	0.756	
38.1 - 38.2	Vc	90	90	90	80	104	104	101	101	101	101	100	100	82	
	fz	0.09	0.09	0.09	0.08	0.121	0.121	0.16	0.16	0.188	0.188	0.208	0.208	0.08	
	RPM	5730	5730	5730	5093	5517	5517	4019	4019	3215	3215	2653	2653	2175	
	FEED	1031	1031	1031	815	1335	1335	1286	1286	1209	1209	1103	1103	348	
	Ap	0.1	0.1	0.063	0.063	0.21	0.21	0.28	0.28	0.5	0.35	0.6	0.42	0.42	
40	Vc	103	103	103	92	117	117	116	116	116	116	115	115	95	
	fz	0.09	0.09	0.09	0.08	0.129	0.129	0.163	0.163	0.19	0.19	0.213	0.213	0.119	
	RPM	6557	6557	6557	5857	6207	6207	4615	4615	3692	3692	3050	3050	2520	
	FEED	1180	1180	1180	937	1601	1601	1505	1505	1403	1403	1300	1300	600	
	Ap	0.14	0.14	0.088	0.088	0.294	0.294	0.392	0.392	0.7	0.49	0.84	0.588	0.588	
41	Vc	90	90	90	80	104	104	101	101	101	101	100	100	82	
	fz	0.09	0.09	0.09	0.08	0.121	0.121	0.16	0.16	0.188	0.188	0.208	0.208	0.08	
	RPM	5730	5730	5730	5093	5517	5517	4019	4019	3215	3215	2653	2653	2175	
	FEED	1031	1031	1031	815	1335	1335	1286	1286	1209	1209	1103	1103	348	
	Ap	0.1	0.1	0.063	0.063	0.21	0.21	0.28	0.28	0.5	0.35	0.6	0.42	0.42	

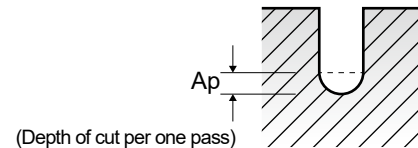

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA

SELECTION GUIDE



SERIES	SEMD98	SEM846	SEM846	SEMD99
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS
SIZE MIN	R0.05	R0.05	R0.25	D0.2
SIZE MAX	R12.5	R6.0	R1.0	D20.0
PAGE	166	172	182	185

SOLID CARBIDE 4G Mill END MILLS

High Speed Cutting
for Pre-Hardened Steels up to HRC55

-	EXTENDED NECK	EXTENDED NECK (6mm Shank)	-
Y-Coating	Y-Coating	Y-Coating	Y-Coating



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 276

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	SEMD98	SEM846	SEM846	SEMD99
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	○	○
	2		About 0.45% C Annealed	190	13	○	○	○	○
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	◎
	6	Low alloy steel	Annealed	180	10	○	○	○	○
	7		Quenched & Tempered	275	29	◎	◎	◎	◎
	8		Quenched & Tempered	300	32	◎	◎	◎	◎
	9		Quenched & Tempered	350	38	◎	◎	◎	◎
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○
	11	Quenched & Tempered		325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15				
	13		Martensitic Quenched & Tempered	240	23				
	14		Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○
	18		Pearlitic	250	25	○	○	○	○
	19	Malleable cast iron	Ferritic	130		○	○	○	○
20	Pearlitic		230	21	○	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60					
	22		Curable Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28		CuSn, lead-free copper and electrolytic copper	100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
36	Titanium Alloys	Pure Titanium	400 Rm						
37		Alpha + Beta Alloys	Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55	○	○	○	○
	39		Hardened	630	60				
	40	Chilled Cast Iron	Cast	400	42	◎	◎	◎	◎
	41	Hardened Cast Iron	Hardened	550	55	○	○	○	○