


**CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS** (Short, Regular, Long Shank)

- **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS**
- **Fraise carbure, 4 dents, torique, hélice multiple**
- **MD, 4 TAGLIENTI, TORICA (Serie corta, media e lunga)**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern  $\geq 3.0\text{mm } \phi$  werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.
- ▶ Erhältlich in den Schaft-Ausführungen: standard und lang.

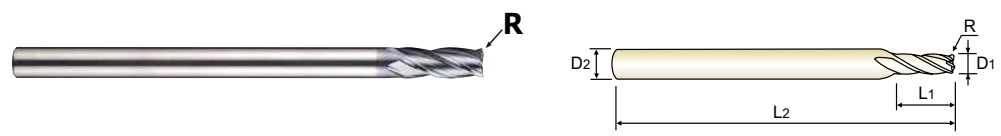

CARBIDE 4 27°/30° ±0.02 PLAIN P.300-301

D<math>\phi</math>3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME010100054SE	R0.05	1.0	4	2.5	50	4mm Shank
SEME01010014SE	R0.1	1.0	4	2.5	50	4mm Shank
SEME01010024SE	R0.2	1.0	4	2.5	50	4mm Shank
SEME01010034SE	R0.3	1.0	4	2.5	50	4mm Shank
SEME01010005E	R0.05	1.0	6	2.5	50	-
★ SEME0101001E	R0.1	1.0	6	2.5	50	-
SEME0101002E	R0.2	1.0	6	2.5	50	-
SEME0101003E	R0.3	1.0	6	2.5	50	-
SEME010120054SE	R0.05	1.2	4	3	50	4mm Shank
SEME01012014SE	R0.1	1.2	4	3	50	4mm Shank
SEME01012024SE	R0.2	1.2	4	3	50	4mm Shank
SEME01012034SE	R0.3	1.2	4	3	50	4mm Shank
SEME01012005E	R0.05	1.2	6	3	50	-
SEME0101201E	R0.1	1.2	6	3	50	-
SEME0101202E	R0.2	1.2	6	3	50	-
SEME0101203E	R0.3	1.2	6	3	50	-
SEME010150054SE	R0.05	1.5	4	4	50	4mm Shank
SEME01015014SE	R0.1	1.5	4	4	50	4mm Shank
SEME01015024SE	R0.2	1.5	4	4	50	4mm Shank
SEME01015034SE	R0.3	1.5	4	4	50	4mm Shank
SEME01015054SE	R0.5	1.5	4	4	50	4mm Shank
SEME01015005E	R0.05	1.5	6	4	50	-
SEME0101501E	R0.1	1.5	6	4	50	-
SEME0101502E	R0.2	1.5	6	4	50	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good


ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○	○	○	◎	○

**CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS** (Short, Regular, Long Shank)

- **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS**
- **Fraise carbure, 4 dents, torique, hélice multiple**
- **MD, 4 TAGLIENTI, TORICA (Serie corta, media e lunga)**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.
- ▶ Erhältlich in den Schaft-Ausführungen: standard und lang.

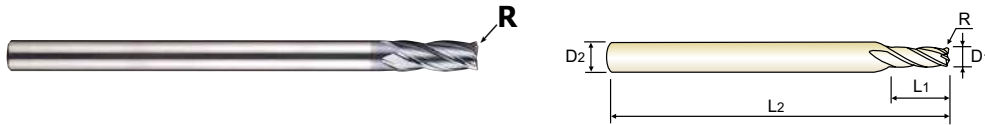

D<ø3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME0101503E	R0.3	1.5	6	4	50	-
SEME0101505E	R0.5	1.5	6	4	50	-
SEME01020014SE	R0.1	2.0	4	6	50	4mm Shank
SEME01020024SE	R0.2	2.0	4	6	50	4mm Shank
SEME01020034SE	R0.3	2.0	4	6	50	4mm Shank
SEME01020054SE	R0.5	2.0	4	6	50	4mm Shank
★ SEME0102001E	R0.1	2.0	6	6	50	-
★ SEME0102002E	R0.2	2.0	6	6	50	-
SEME0102003E	R0.3	2.0	6	6	50	-
SEME0102005E	R0.5	2.0	6	6	50	-
SEME01025014SE	R0.1	2.5	4	7	60	4mm Shank
SEME01025024SE	R0.2	2.5	4	7	60	4mm Shank
SEME01025034SE	R0.3	2.5	4	7	60	4mm Shank
SEME01025054SE	R0.5	2.5	4	7	60	4mm Shank
SEME0102501E	R0.1	2.5	6	7	60	-
SEME0102502E	R0.2	2.5	6	7	60	-
SEME0102503E	R0.3	2.5	6	7	60	-
SEME0102505E	R0.5	2.5	6	7	60	-
SEME0103001E	R0.1	3.0	6	8	60	-
★ SEME0103002E	R0.2	3.0	6	8	60	-
★ SEME0103003E	R0.3	3.0	6	8	60	-
★ SEME0103005E	R0.5	3.0	6	8	60	-
SEME0103010E	R1.0	3.0	6	8	60	-
SEME0103501E	R0.1	3.5	6	10	70	-

★ : Stock Item

▶ NEXT PAGE


Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○



**CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS (Short, Regular, Long Shank)**

- **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS**
- **Fraise carbure, 4 dents, torique, hélice multiple**
- **MD, 4 TAGLIANTI, TORICA (Serie corta, media e lunga)**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
  - ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
  - ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
  - ▶ Available in short, regular and long shank end mills.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
  - ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
  - ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm Ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.
  - ▶ Erhältlich in den Schaft-Ausführungen: standard und lang.

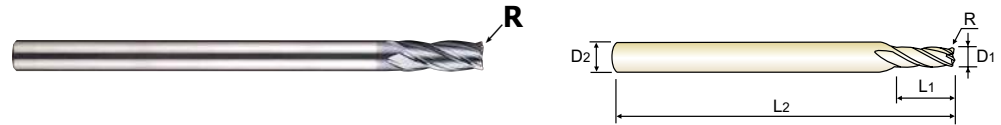

CARBIDE 4 27°/30° ±0.02 PLAIN P.300-301

D<Ø3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME0103502E	R0.2	3.5	6	10	70	-
SEME0103503E	R0.3	3.5	6	10	70	-
SEME0103505E	R0.5	3.5	6	10	70	-
SEME01040014SE	R0.1	4.0	4	10	70	4mm Shank
SEME01040024SE	R0.2	4.0	4	10	70	4mm Shank
SEME01040034SE	R0.3	4.0	4	10	70	4mm Shank
SEME01040054SE	R0.5	4.0	4	10	70	4mm Shank
SEME01040104SE	R1.0	4.0	4	10	70	4mm Shank
SEME01040011004SE	R0.1	4.0	4	10	100	4mm Shank
SEME01040021004SE	R0.2	4.0	4	10	100	4mm Shank
SEME01040031004SE	R0.3	4.0	4	10	100	4mm Shank
SEME01040051004SE	R0.5	4.0	4	10	100	4mm Shank
SEME01040101004SE	R1.0	4.0	4	10	100	4mm Shank
SEME0104001E	R0.1	4.0	6	10	70	Regular
★ SEME0104002E	R0.2	4.0	6	10	70	Regular
★ SEME0104003E	R0.3	4.0	6	10	70	Regular
★ SEME0104005E	R0.5	4.0	6	10	70	Regular
★ SEME0104010E	R1.0	4.0	6	10	70	Regular
SEME0104501E	R0.1	4.5	6	11	80	-
SEME0104502E	R0.2	4.5	6	11	80	-
SEME0104503E	R0.3	4.5	6	11	80	-
SEME0104505E	R0.5	4.5	6	11	80	-
SEME0105001E	R0.1	5.0	6	13	90	-
SEME0105002E	R0.2	5.0	6	13	90	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

**CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS** (Short, Regular, Long Shank)

- **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS**
- (●) **Fraise carbure, 4 dents, torique, hélice multiple**
- (●) **MD, 4 TAGLIENTI, TORICA (Serie corta, media e lunga)**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern  $\geq 3,0\text{mm } \phi$  werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.
- ▶ Erhältlich in den Schaft-Ausführungen: standard und lang.

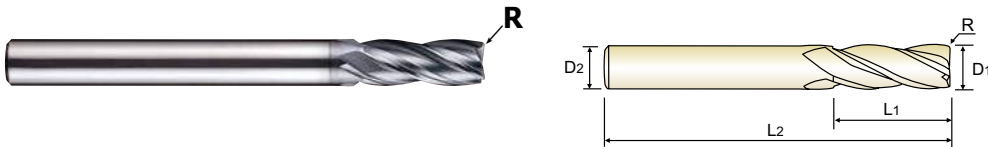

D<math>\phi</math>3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
★ SEME0105003E	R0.3	5.0	6	13	90	-
★ SEME0105005E	R0.5	5.0	6	13	90	-
SEME0105010E	R1.0	5.0	6	13	90	-
SEME0105501E	R0.1	5.5	6	13	90	-
SEME0105502E	R0.2	5.5	6	13	90	-
SEME0105503E	R0.3	5.5	6	13	90	-
SEME0105505E	R0.5	5.5	6	13	90	-
SEME0105510E	R1.0	5.5	6	13	90	-
SEME0106001060E	R0.1	6.0	6	15	60	Short
SEME0106002060E	R0.2	6.0	6	15	60	Short
SEME0106001E	R0.1	6.0	6	15	90	Regular
★ SEME0106002E	R0.2	6.0	6	15	90	Regular
★ SEME0106003E	R0.3	6.0	6	15	90	Regular
★ SEME0106005E	R0.5	6.0	6	15	90	Regular
★ SEME0106010E	R1.0	6.0	6	15	90	Regular
SEME0106015E	R1.5	6.0	6	15	90	Regular
SEME0106020E	R2.0	6.0	6	15	90	Regular
SEME0106005110E	R0.5	6.0	6	15	110	Long Shank
SEME0106010110E	R1.0	6.0	6	15	110	Long Shank
SEME0106005130E	R0.5	6.0	6	15	130	Long Shank
SEME0106010130E	R1.0	6.0	6	15	130	Long Shank
SEME0107001E	R0.1	7.0	8	16	90	-
SEME0107002E	R0.2	7.0	8	16	90	-
SEME0107003E	R0.3	7.0	8	16	90	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○		

ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

# YG 4G MILL END MILLS

PLAIN SHANK

**SEME01** SERIES

## CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS (Short, Regular, Long Shank)



● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS**

● **Fraise carbure, 4 dents, torique, hélice multiple**

● **VMD, 4 TAGLIENTI, TORICA (Serie corta, media e lunga)**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern  $\geq 3,0\text{mm } \phi$  werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.
- ▶ Erhältlich in den Schaft-Ausführungen: standard und lang.

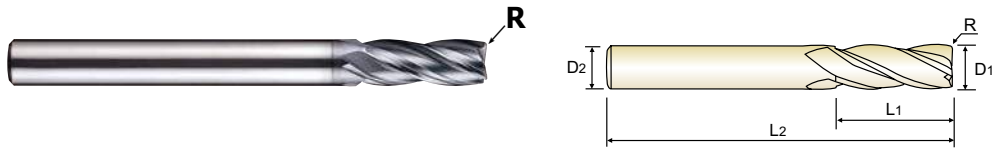

D<math>\phi</math>3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME0107005E	R0.5	7.0	8	16	90	-
SEME0107010E	R1.0	7.0	8	16	90	-
SEME0107020E	R2.0	7.0	8	16	90	-
★ SEME0108003070E	R0.3	8.0	8	20	70	Short
★ SEME0108005070E	R0.5	8.0	8	20	70	Short
★ SEME0108010070E	R1.0	8.0	8	20	70	Short
SEME0108001E	R0.1	8.0	8	20	100	Regular
★ SEME0108002E	R0.2	8.0	8	20	100	Regular
★ SEME0108003E	R0.3	8.0	8	20	100	Regular
★ SEME0108005E	R0.5	8.0	8	20	100	Regular
★ SEME0108010E	R1.0	8.0	8	20	100	Regular
★ SEME0108015E	R1.5	8.0	8	20	100	Regular
★ SEME0108020E	R2.0	8.0	8	20	100	Regular
SEME0108025E	R2.5	8.0	8	20	100	Regular
SEME0108030E	R3.0	8.0	8	20	100	Regular
SEME0108005120E	R0.5	8.0	8	20	120	Long Shank
SEME0108010120E	R1.0	8.0	8	20	120	Long Shank
SEME0108005150E	R0.5	8.0	8	20	150	Long Shank
SEME0108010150E	R1.0	8.0	8	20	150	Long Shank
SEME0110003075E	R0.3	10.0	10	25	75	Short
SEME0110005075E	R0.5	10.0	10	25	75	Short
SEME0110010075E	R1.0	10.0	10	25	75	Short
SEME0110001E	R0.1	10.0	10	25	100	Regular
SEME0110002E	R0.2	10.0	10	25	100	Regular

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○





**CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS** (Short, Regular, Long Shank)

- **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS**
- (i) **Fraise carbure, 4 dents, torique, hélice multiple**
- (i) **VMD, 4 TAGLIENTI, TORICA (Serie corta, media e lunga)**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern  $\geq 3,0\text{mm } \phi$  werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.
- ▶ Erhältlich in den Schaft-Ausführungen: standard und lang.

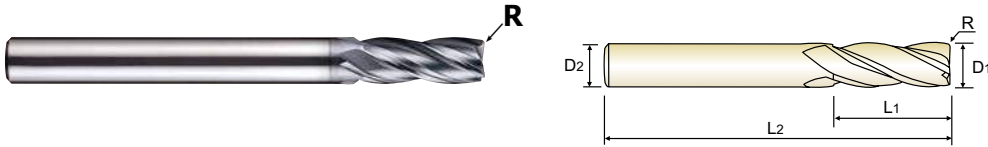

D<math>\phi</math>3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
SEME0110003E	R0.3	10.0	10	25	100	Regular
SEME0110005E	R0.5	10.0	10	25	100	Regular
★ SEME0110010E	R1.0	10.0	10	25	100	Regular
★ SEME0110015E	R1.5	10.0	10	25	100	Regular
★ SEME0110020E	R2.0	10.0	10	25	100	Regular
★ SEME0110025E	R2.5	10.0	10	25	100	Regular
SEME0110030E	R3.0	10.0	10	25	100	Regular
SEME0110040E	R4.0	10.0	10	25	100	Regular
SEME0110005130E	R0.5	10.0	10	22	130	Long Shank
SEME0110010130E	R1.0	10.0	10	22	130	Long Shank
SEME0110005150E	R0.5	10.0	10	22	150	Long Shank
SEME0110010150E	R1.0	10.0	10	22	150	Long Shank
★ SEME0111002E	R0.2	11.0	12	25	110	-
★ SEME0111003E	R0.3	11.0	12	25	110	-
SEME0111005E	R0.5	11.0	12	25	110	-
SEME0111010E	R1.0	11.0	12	25	110	-
SEME0111020E	R2.0	11.0	12	25	110	-
SEME0112003080E	R0.3	12.0	12	30	80	Short
SEME0112005080E	R0.5	12.0	12	30	80	Short
SEME0112010080E	R1.0	12.0	12	30	80	Short
SEME0112001E	R0.1	12.0	12	30	110	Regular
SEME0112002E	R0.2	12.0	12	30	110	Regular
SEME0112003E	R0.3	12.0	12	30	110	Regular
★ SEME0112005E	R0.5	12.0	12	30	110	Regular

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	◎	○

# YG 4G MILL END MILLS

PLAIN SHANK

**SEME01** SERIES

## CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS (Short, Regular, Long Shank)


● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS**

● **Fraise carbure, 4 dents, torique, hélice multiple**

● **VMD, 4 TAGLIENTI, TORICA (Serie corta, media e lunga)**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Available in short, regular and long shank end mills.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern  $\geq 3,0\text{mm } \phi$  werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.
- ▶ Erhältlich in den Schaft-Ausführungen: standard und lang.

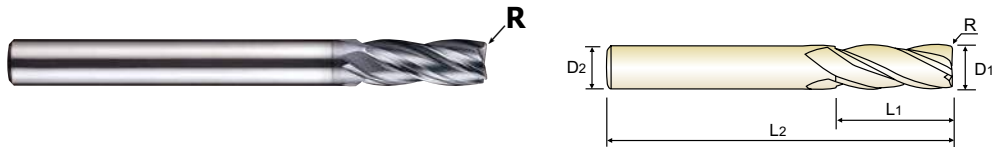

D<math>\phi</math>3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Remark
	R	D1	D2	L1	L2	
★ SEME0112010E	R1.0	12.0	12	30	110	Regular
★ SEME0112015E	R1.5	12.0	12	30	110	Regular
★ SEME0112020E	R2.0	12.0	12	30	110	Regular
SEME0112025E	R2.5	12.0	12	30	110	Regular
SEME0112030E	R3.0	12.0	12	30	110	Regular
SEME0112040E	R4.0	12.0	12	30	110	Regular
SEME0112050E	R5.0	12.0	12	30	110	Regular
SEME0112005130E	R0.5	12.0	12	30	130	Long Shank
SEME0112010130E	R1.0	12.0	12	30	130	Long Shank
SEME0112005150E	R0.5	12.0	12	30	130	Long Shank
SEME0112010150E	R1.0	12.0	12	30	130	Long Shank
SEME0114005E	R0.5	14.0	16	35	150	-
SEME0114010E	R1.0	14.0	16	35	150	-
SEME0114020E	R2.0	14.0	16	35	150	-
★ SEME0116005E	R0.5	16.0	16	32	150	-
★ SEME0116010E	R1.0	16.0	16	32	150	-
★ SEME0116015E	R1.5	16.0	16	32	150	-
★ SEME0116020E	R2.0	16.0	16	32	150	-
SEME0120005E	R0.5	20.0	20	38	150	-
★ SEME0120010E	R1.0	20.0	20	38	150	-
SEME0120015E	R1.5	20.0	20	38	150	-
★ SEME0120020E	R2.0	20.0	20	38	150	-

★ : Stock Item

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○	◎	◎	◎	◎	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	◎	○


**SEME01 SERIES**

**4 FLUTE CORNER RADIUS - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						1.0	1.2	1.5	2.0	2.5	3.0	3.5	4.0
P	1-5	Non-alloy steel	0.05D	2D	Vc	87	93	104	113	118	125	132	135
					fz	0.003	0.003	0.004	0.004	0.006	0.006	0.008	0.01
					RPM	27693	24669	22069	17985	15024	13263	12005	10743
	6-8	Low alloy steel	0.05D	2D	Vc	87	93	104	113	118	125	132	135
					fz	0.003	0.003	0.004	0.004	0.006	0.006	0.008	0.01
					RPM	27693	24669	22069	17985	15024	13263	12005	10743
	9	Low alloy steel	0.05D	2D	Vc	57	59	64	73	75	81	85	86
					fz	0.003	0.004	0.004	0.005	0.007	0.008	0.009	0.011
					RPM	18144	15650	13581	11618	9549	8594	7730	6844
	10-11.1	High alloyed steel, and tool steel	0.05D	2D	Vc	87	93	104	113	118	125	132	135
					fz	0.003	0.003	0.004	0.004	0.006	0.006	0.008	0.01
					RPM	27693	24669	22069	17985	15024	13263	12005	10743
11.2	High alloyed steel, and tool steel	0.05D	2D	Vc	57	59	64	73	75	81	85	86	
				fz	0.003	0.004	0.004	0.005	0.007	0.008	0.009	0.011	
				RPM	18144	15650	13581	11618	9549	8594	7730	6844	
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.05D	2D	Vc	87	93	104	113	118	125	132	135
					fz	0.003	0.003	0.004	0.004	0.006	0.006	0.008	0.01
					RPM	27693	24669	22069	17985	15024	13263	12005	10743
H	38.1 - 38.2	Hardened steel	0.02D	2D	Vc	35	37	40	45	48	50	53	54
					fz	0.003	0.003	0.004	0.005	0.005	0.006	0.007	0.008
					RPM	11141	9815	8488	7162	6112	5305	4820	4297
H	40	Chilled Cast Iron	0.05D	2D	Vc	57	59	64	73	75	81	85	86
					fz	0.003	0.004	0.004	0.005	0.007	0.008	0.009	0.011
					RPM	18144	15650	13581	11618	9549	8594	7730	6844
H	41	Hardened Cast Iron	0.02D	2D	Vc	35	37	40	45	48	50	53	54
					fz	0.003	0.003	0.004	0.005	0.005	0.006	0.007	0.008
					RPM	11141	9815	8488	7162	6112	5305	4820	4297
						134	118	136	143	122	127	135	138

▶ NEXT PAGE






**SEME01** SERIES **4 FLUTE CORNER RADIUS - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

VDI 3323	Parameter	Diameter (Ø)											
		4.5	5.0	5.5	6.0	7.0	8.0	10.0	11.0	12.0	14.0	16.0	20.0
1-5	Vc	141	144	147	149	153	151	158	158	155	159	156	158
	fz	0.011	0.012	0.013	0.014	0.016	0.019	0.023	0.022	0.022	0.022	0.023	0.023
	RPM	9974	9167	8508	7905	6957	6008	5029	4572	4112	3615	3104	2515
6-8	FEED	439	440	442	443	445	457	463	402	362	318	286	231
	Vc	141	144	147	149	153	151	158	158	155	159	156	158
	fz	0.011	0.012	0.013	0.014	0.016	0.019	0.023	0.022	0.022	0.022	0.023	0.023
9	RPM	9974	9167	8508	7905	6957	6008	5029	4572	4112	3615	3104	2515
	FEED	439	440	442	443	445	457	463	402	362	318	286	231
	Vc	89	91	94	95	97	96	103	105	105	107	106	103
10	fz	0.013	0.016	0.017	0.018	0.02	0.024	0.027	0.028	0.029	0.028	0.027	0.027
	RPM	6295	5793	5440	5040	4411	3820	3279	3038	2785	2433	2109	1639
	FEED	327	371	370	363	353	367	354	340	323	272	228	177
11.1	Vc	141	144	147	149	153	151	158	158	155	159	156	158
	fz	0.011	0.012	0.013	0.014	0.016	0.019	0.023	0.022	0.022	0.022	0.023	0.023
	RPM	9974	9167	8508	7905	6957	6008	5029	4572	4112	3615	3104	2515
11.2	FEED	439	440	442	443	445	457	463	402	362	318	286	231
	Vc	89	91	94	95	97	96	103	105	105	107	106	103
	fz	0.013	0.016	0.017	0.018	0.02	0.024	0.027	0.028	0.029	0.028	0.027	0.027
15 - 20	RPM	6295	5793	5440	5040	4411	3820	3279	3038	2785	2433	2109	1639
	FEED	327	371	370	363	353	367	354	340	323	272	228	177
	Vc	141	144	147	149	153	151	158	158	155	159	156	158
38.1 - 38.2	fz	0.011	0.012	0.013	0.014	0.016	0.019	0.023	0.022	0.022	0.022	0.023	0.023
	RPM	9974	9167	8508	7905	6957	6008	5029	4572	4112	3615	3104	2515
	FEED	439	440	442	443	445	457	463	402	362	318	286	231
40	Vc	57	60	61	62	64	63	63	64	63	65	64	63
	fz	0.01	0.011	0.012	0.013	0.015	0.017	0.021	0.021	0.021	0.021	0.022	0.023
	RPM	4032	3820	3530	3289	2910	2507	2005	1852	1671	1478	1273	1003
41	FEED	161	168	169	171	175	170	168	156	140	124	112	92
	Vc	89	91	94	95	97	96	103	105	105	107	106	103
	fz	0.013	0.016	0.017	0.018	0.02	0.024	0.027	0.028	0.029	0.028	0.027	0.027
40	RPM	6295	5793	5440	5040	4411	3820	3279	3038	2785	2433	2109	1639
	FEED	327	371	370	363	353	367	354	340	323	272	228	177
	Vc	57	60	61	62	64	63	63	64	63	65	64	63
41	fz	0.01	0.011	0.012	0.013	0.015	0.017	0.021	0.021	0.021	0.021	0.022	0.023
	RPM	4032	3820	3530	3289	2910	2507	2005	1852	1671	1478	1273	1003
	FEED	161	168	169	171	175	170	168	156	140	124	112	92



\* 1.5XD Axial cutting depth should be for diameter over 16mm

SELECTION GUIDE



SERIES	SEMD98	SEM846	SEM846	SEMD99
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS
SIZE MIN	R0.05	R0.05	R0.25	D0.2
SIZE MAX	R12.5	R6.0	R1.0	D20.0
PAGE	166	172	182	185

SOLID CARBIDE  
**4G Mill**  
END MILLS

High Speed Cutting for Pre-Hardened Steels up to HRC55

-	EXTENDED NECK	EXTENDED NECK (6mm Shank)	-
Y-Coating	Y-Coating	Y-Coating	Y-Coating



Please visit [globalyg1.com/mat](http://globalyg1.com/mat) for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 276

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	SEMD98	SEM846	SEM846	SEMD99
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	○	○
	2		About 0.45% C Annealed	190	13	○	○	○	○
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	◎
	6	Low alloy steel	Annealed	180	10	○	○	○	○
	7		Quenched & Tempered	275	29	◎	◎	◎	◎
	8		Quenched & Tempered	300	32	◎	◎	◎	◎
	9		Quenched & Tempered	350	38	◎	◎	◎	◎
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○
	11	Quenched & Tempered		325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15				
	13		Martensitic Quenched & Tempered	240	23				
	14		Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○
	18		Pearlitic	250	25	○	○	○	○
	19	Malleable cast iron	Ferritic	130		○	○	○	○
20	Pearlitic		230	21	○	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60					
	22		Curable Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28		CuSn, lead-free copper and electrolytic copper	100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
36	Titanium Alloys	Pure Titanium	400 Rm						
37		Alpha + Beta Alloys	Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55	○	○	○	○
	39		Hardened	630	60				
	40	Chilled Cast Iron	Cast	400	42	◎	◎	◎	◎
	41	Hardened Cast Iron	Hardened	550	55	○	○	○	○

