


CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETEL**
 (●) **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
 (●) **MD, 4 TAGLIENTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

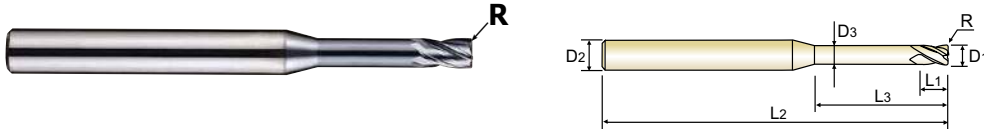

D<ø3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME6401000503E	R0.05	1.0	4	1.5	3	50	0.95	-
SEME6401000504E	R0.05	1.0	4	1.5	4	50	0.95	-
SEME6401000506E	R0.05	1.0	4	1.5	6	50	0.95	-
SEME6401000508E	R0.05	1.0	4	1.5	8	50	0.95	-
SEME6401000510E	R0.05	1.0	4	1.5	10	50	0.95	-
SEME6401000512E	R0.05	1.0	4	1.5	12	50	0.95	-
SEME6401000514E	R0.05	1.0	4	1.5	14	50	0.95	-
SEME6401000516E	R0.05	1.0	4	1.5	16	50	0.95	-
SEME6401000520E	R0.05	1.0	4	1.5	20	50	0.95	-
SEME640100103E	R0.1	1.0	4	1.5	3	50	0.95	-
★ SEME640100104E	R0.1	1.0	4	1.5	4	50	0.95	-
★ SEME640100106E	R0.1	1.0	4	1.5	6	50	0.95	-
★ SEME640100108E	R0.1	1.0	4	1.5	8	50	0.95	-
SEME640100110E	R0.1	1.0	4	1.5	10	50	0.95	-
SEME640100112E	R0.1	1.0	4	1.5	12	50	0.95	-
SEME640100114E	R0.1	1.0	4	1.5	14	50	0.95	-
SEME640100116E	R0.1	1.0	4	1.5	16	50	0.95	-
SEME640100120E	R0.1	1.0	4	1.5	20	50	0.95	-
SEME640100203E	R0.2	1.0	4	1.5	3	50	0.95	-
★ SEME640100204E	R0.2	1.0	4	1.5	4	50	0.95	-
★ SEME640100206E	R0.2	1.0	4	1.5	6	50	0.95	-
★ SEME640100208E	R0.2	1.0	4	1.5	8	50	0.95	-
★ SEME640100210E	R0.2	1.0	4	1.5	10	50	0.95	-
SEME640100212E	R0.2	1.0	4	1.5	12	50	0.95	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	◎	◎


YG 4G MILL END MILLS

PLAIN SHANK **SEME64** SERIES

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

🇩🇪 **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETL**
🇫🇷 **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
🇮🇹 **MD, 4 TAGLIANTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
 - ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
 - ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
 - ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
 - ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm Ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

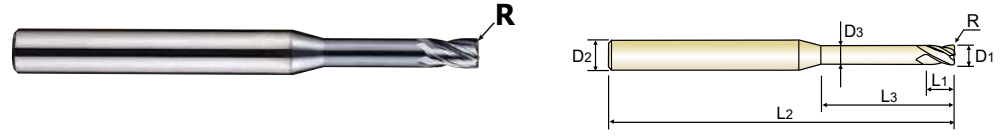

CARBIDE 4 27°/30° ±0.02 PLAIN P.302-305

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME640100214E	R0.2	1.0	4	1.5	14	50	0.95	-
SEME640100216E	R0.2	1.0	4	1.5	16	50	0.95	-
SEME640100220E	R0.2	1.0	4	1.5	20	50	0.95	-
SEME640100303E	R0.3	1.0	4	1.5	3	50	0.95	-
★ SEME640100304E	R0.3	1.0	4	1.5	4	50	0.95	-
★ SEME640100306E	R0.3	1.0	4	1.5	6	50	0.95	-
★ SEME640100308E	R0.3	1.0	4	1.5	8	50	0.95	-
SEME640100310E	R0.3	1.0	4	1.5	10	50	0.95	-
SEME640100312E	R0.3	1.0	4	1.5	12	50	0.95	-
SEME640100314E	R0.3	1.0	4	1.5	14	50	0.95	-
SEME640100316E	R0.3	1.0	4	1.5	16	50	0.95	-
SEME640100320E	R0.3	1.0	4	1.5	20	50	0.95	-
SEME6401200503E	R0.05	1.2	4	1.8	3	50	1.15	-
SEME6401200504E	R0.05	1.2	4	1.8	4	50	1.15	-
SEME6401200506E	R0.05	1.2	4	1.8	6	50	1.15	-
SEME6401200508E	R0.05	1.2	4	1.8	8	50	1.15	-
SEME6401200510E	R0.05	1.2	4	1.8	10	50	1.15	-
SEME6401200512E	R0.05	1.2	4	1.8	12	50	1.15	-
SEME6401200516E	R0.05	1.2	4	1.8	16	50	1.15	-
SEME6401200520E	R0.05	1.2	4	1.8	20	50	1.15	-
SEME640120103E	R0.1	1.2	4	1.8	3	50	1.15	-
★ SEME640120104E	R0.1	1.2	4	1.8	4	50	1.15	-
★ SEME640120106E	R0.1	1.2	4	1.8	6	50	1.15	-
★ SEME640120108E	R0.1	1.2	4	1.8	8	50	1.15	-

★ : Stock Item ▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron	Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	◎	○

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

- **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETEL**
- (●) **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
- (●) **MD, 4 TAGLIENTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern $\geq 3,0\text{mm } \phi$ werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

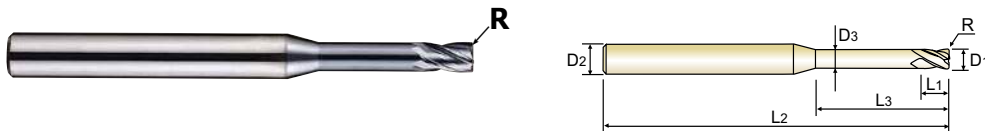

D<math>\phi</math>3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME640120110E	R0.1	1.2	4	1.8	10	50	1.15	-
SEME640120112E	R0.1	1.2	4	1.8	12	50	1.15	-
SEME640120116E	R0.1	1.2	4	1.8	16	50	1.15	-
SEME640120120E	R0.1	1.2	4	1.8	20	50	1.15	-
SEME640120203E	R0.2	1.2	4	1.8	3	50	1.15	-
★ SEME640120204E	R0.2	1.2	4	1.8	4	50	1.15	-
★ SEME640120206E	R0.2	1.2	4	1.8	6	50	1.15	-
★ SEME640120208E	R0.2	1.2	4	1.8	8	50	1.15	-
SEME640120210E	R0.2	1.2	4	1.8	10	50	1.15	-
SEME640120212E	R0.2	1.2	4	1.8	12	50	1.15	-
SEME640120216E	R0.2	1.2	4	1.8	16	50	1.15	-
SEME640120220E	R0.2	1.2	4	1.8	20	50	1.15	-
SEME640120303E	R0.3	1.2	4	1.8	3	50	1.15	-
★ SEME640120304E	R0.3	1.2	4	1.8	4	50	1.15	-
★ SEME640120306E	R0.3	1.2	4	1.8	6	50	1.15	-
★ SEME640120308E	R0.3	1.2	4	1.8	8	50	1.15	-
SEME640120310E	R0.3	1.2	4	1.8	10	50	1.15	-
SEME640120312E	R0.3	1.2	4	1.8	12	50	1.15	-
SEME640120316E	R0.3	1.2	4	1.8	16	50	1.15	-
SEME640120320E	R0.3	1.2	4	1.8	20	50	1.15	-
SEME6401500504E	R0.05	1.5	4	2.3	4	50	1.45	-
SEME6401500506E	R0.05	1.5	4	2.3	6	50	1.45	-
SEME6401500508E	R0.05	1.5	4	2.3	8	50	1.45	-
SEME6401500510E	R0.05	1.5	4	2.3	10	50	1.45	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	

ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100										550	630	400	550
Recommend																		◎	◎	◎	◎


YG 4G MILL END MILLS

PLAIN SHANK **SEME64** SERIES

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETL**
● **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
● **MD, 4 TAGLIANTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
 - ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
 - ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
 - ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
 - ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern $\geq 3,0\text{mm } \phi$ werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

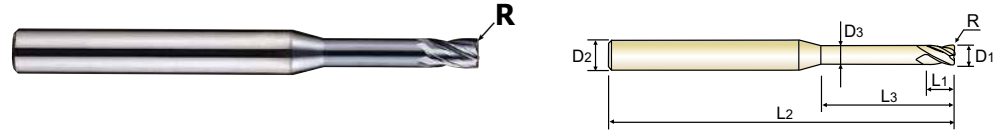

CARBIDE
4
27°/30°
R
PLAIN
P.302-305

Dϕ3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME6401500512E	R0.05	1.5	4	2.3	12	50	1.45	-
SEME6401500514E	R0.05	1.5	4	2.3	14	50	1.45	-
SEME6401500516E	R0.05	1.5	4	2.3	16	50	1.45	-
SEME6401500520E	R0.05	1.5	4	2.3	20	50	1.45	-
SEME6401500522E	R0.05	1.5	4	2.3	22	60	1.45	-
SEME6401500526E	R0.05	1.5	4	2.3	26	60	1.45	-
SEME640150104E	R0.1	1.5	4	2.3	4	50	1.45	-
★ SEME640150106E	R0.1	1.5	4	2.3	6	50	1.45	-
★ SEME640150108E	R0.1	1.5	4	2.3	8	50	1.45	-
★ SEME640150110E	R0.1	1.5	4	2.3	10	50	1.45	-
★ SEME640150112E	R0.1	1.5	4	2.3	12	50	1.45	-
SEME640150114E	R0.1	1.5	4	2.3	14	50	1.45	-
SEME640150116E	R0.1	1.5	4	2.3	16	50	1.45	-
SEME640150118E	R0.1	1.5	4	2.3	18	50	1.45	-
SEME640150120E	R0.1	1.5	4	2.3	20	50	1.45	-
SEME640150122E	R0.1	1.5	4	2.3	22	60	1.45	-
SEME640150126E	R0.1	1.5	4	2.3	26	60	1.45	-
SEME640150204E	R0.2	1.5	4	2.3	4	50	1.45	-
★ SEME640150206E	R0.2	1.5	4	2.3	6	50	1.45	-
★ SEME640150208E	R0.2	1.5	4	2.3	8	50	1.45	-
★ SEME640150210E	R0.2	1.5	4	2.3	10	50	1.45	-
★ SEME640150212E	R0.2	1.5	4	2.3	12	50	1.45	-
SEME640150214E	R0.2	1.5	4	2.3	14	50	1.45	-
SEME640150216E	R0.2	1.5	4	2.3	16	50	1.45	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	


ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	◎	○

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETEL**
 (●) **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
 (●) **MD, 4 TAGLIENTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

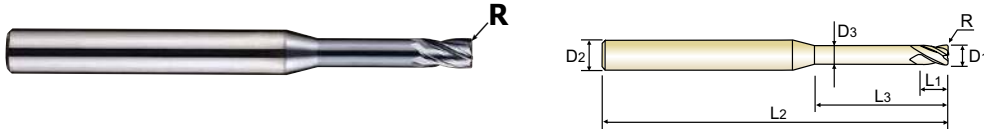

D<03, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME640150220E	R0.2	1.5	4	2.3	20	50	1.45	-
SEME640150222E	R0.2	1.5	4	2.3	22	60	1.45	-
SEME640150226E	R0.2	1.5	4	2.3	26	60	1.45	-
SEME640150304E	R0.3	1.5	4	2.3	4	50	1.45	-
★ SEME640150306E	R0.3	1.5	4	2.3	6	50	1.45	-
★ SEME640150308E	R0.3	1.5	4	2.3	8	50	1.45	-
★ SEME640150310E	R0.3	1.5	4	2.3	10	50	1.45	-
★ SEME640150312E	R0.3	1.5	4	2.3	12	50	1.45	-
SEME640150314E	R0.3	1.5	4	2.3	14	50	1.45	-
SEME640150316E	R0.3	1.5	4	2.3	16	50	1.45	-
SEME640150320E	R0.3	1.5	4	2.3	20	50	1.45	-
SEME640150322E	R0.3	1.5	4	2.3	22	60	1.45	-
SEME640150326E	R0.3	1.5	4	2.3	26	60	1.45	-
SEME640150504E	R0.5	1.5	4	2.3	4	50	1.45	-
★ SEME640150506E	R0.5	1.5	4	2.3	6	50	1.45	-
★ SEME640150508E	R0.5	1.5	4	2.3	8	50	1.45	-
★ SEME640150510E	R0.5	1.5	4	2.3	10	50	1.45	-
★ SEME640150512E	R0.5	1.5	4	2.3	12	50	1.45	-
SEME640150514E	R0.5	1.5	4	2.3	14	50	1.45	-
SEME640150516E	R0.5	1.5	4	2.3	16	50	1.45	-
SEME640150520E	R0.5	1.5	4	2.3	20	50	1.45	-
SEME640150522E	R0.5	1.5	4	2.3	22	60	1.45	-
SEME640150526E	R0.5	1.5	4	2.3	26	60	1.45	-
★ SEME640200106E	R0.1	2.0	4	3	6	50	1.95	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100										550	630	400	550
Recommend																		○	◎	◎	○


YG 4G MILL END MILLS

PLAIN SHANK **SEME64** SERIES

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

🇩🇪 **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETL**
🇫🇷 **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
🇮🇹 **MD, 4 TAGLIANTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
 - ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
 - ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
 - ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
 - ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern $\geq 3,0\text{mm } \phi$ werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

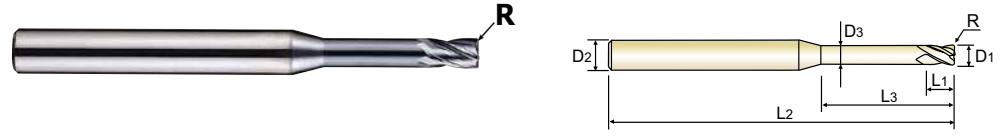

CARBIDE 4 27°/30° ±0.02 PLAIN P.302-305
 Dϕ3, 30° HELIX

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
★ SEME640200108E	R0.1	2.0	4	3	8	50	1.95	-
★ SEME640200110E	R0.1	2.0	4	3	10	50	1.95	-
★ SEME640200112E	R0.1	2.0	4	3	12	50	1.95	-
SEME640200114E	R0.1	2.0	4	3	14	50	1.95	-
SEME640200116E	R0.1	2.0	4	3	16	50	1.95	-
SEME640200120E	R0.1	2.0	4	3	20	50	1.95	-
SEME640200122E	R0.1	2.0	4	3	22	60	1.95	-
SEME640200126E	R0.1	2.0	4	3	26	60	1.95	-
SEME640200130E	R0.1	2.0	4	3	30	70	1.95	-
★ SEME640200206E	R0.2	2.0	4	3	6	50	1.95	-
★ SEME640200208E	R0.2	2.0	4	3	8	50	1.95	-
★ SEME640200210E	R0.2	2.0	4	3	10	50	1.95	-
★ SEME640200212E	R0.2	2.0	4	3	12	50	1.95	-
SEME640200214E	R0.2	2.0	4	3	14	50	1.95	-
SEME640200216E	R0.2	2.0	4	3	16	50	1.95	-
SEME640200220E	R0.2	2.0	4	3	20	50	1.95	-
SEME640200222E	R0.2	2.0	4	3	22	60	1.95	-
SEME640200226E	R0.2	2.0	4	3	26	60	1.95	-
SEME640200230E	R0.2	2.0	4	3	30	70	1.95	-
★ SEME640200306E	R0.3	2.0	4	3	6	50	1.95	-
★ SEME640200308E	R0.3	2.0	4	3	8	50	1.95	-
★ SEME640200310E	R0.3	2.0	4	3	10	50	1.95	-
★ SEME640200312E	R0.3	2.0	4	3	12	50	1.95	-
SEME640200314E	R0.3	2.0	4	3	14	50	1.95	-

★ : Stock Item ▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M			K					
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	◎	○

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETEL**
 (●) **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
 (●) **MD, 4 TAGLIENTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.



CARBIDE 4 27°/30° ±0.02 PLAIN P.302-305

D<ø3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME640200316E	R0.3	2.0	4	3	16	50	1.95	-
SEME640200320E	R0.3	2.0	4	3	20	50	1.95	-
SEME640200322E	R0.3	2.0	4	3	22	60	1.95	-
SEME640200326E	R0.3	2.0	4	3	26	60	1.95	-
SEME640200330E	R0.3	2.0	4	3	30	70	1.95	-
★ SEME640200506E	R0.5	2.0	4	3	6	50	1.95	-
★ SEME640200508E	R0.5	2.0	4	3	8	50	1.95	-
★ SEME640200510E	R0.5	2.0	4	3	10	50	1.95	-
★ SEME640200512E	R0.5	2.0	4	3	12	50	1.95	-
★ SEME640200514E	R0.5	2.0	4	3	14	50	1.95	-
★ SEME640200516E	R0.5	2.0	4	3	16	50	1.95	-
★ SEME640200520E	R0.5	2.0	4	3	20	50	1.95	-
SEME640200522E	R0.5	2.0	4	3	22	60	1.95	-
SEME640200526E	R0.5	2.0	4	3	26	60	1.95	-
SEME640200530E	R0.5	2.0	4	3	30	70	1.95	-
SEME640250108E	R0.1	2.5	4	4	8	50	2.40	-
SEME640250110E	R0.1	2.5	4	4	10	50	2.40	-
SEME640250112E	R0.1	2.5	4	4	12	50	2.40	-
SEME640250114E	R0.1	2.5	4	4	14	50	2.40	-
SEME640250116E	R0.1	2.5	4	4	16	50	2.40	-
SEME640250120E	R0.1	2.5	4	4	20	50	2.40	-
SEME640250126E	R0.1	2.5	4	4	26	60	2.40	-
SEME640250130E	R0.1	2.5	4	4	30	70	2.40	-
SEME640250208E	R0.2	2.5	4	4	8	50	2.40	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	13	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	○	◎	○	◎	

ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100										550	630	400	550
Recommend																		◎	◎	◎	◎

YG 4G MILL END MILLS


PLAIN SHANK **SEME64** SERIES

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETL**
● **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
● **MD, 4 TAGLIANTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern $\geq 3,0\text{mm } \phi$ werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

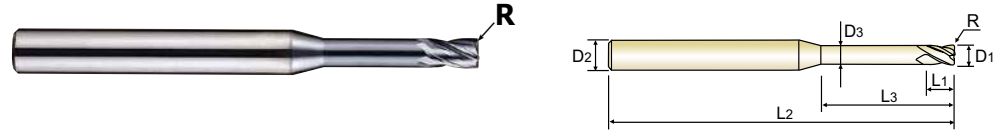

CARBIDE
4
27°/30°
R
PLAIN
P.302-305

Dϕ3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME640250210E	R0.2	2.5	4	4	10	50	2.40	-
SEME640250212E	R0.2	2.5	4	4	12	50	2.40	-
SEME640250214E	R0.2	2.5	4	4	14	50	2.40	-
SEME640250216E	R0.2	2.5	4	4	16	50	2.40	-
SEME640250220E	R0.2	2.5	4	4	20	50	2.40	-
SEME640250226E	R0.2	2.5	4	4	26	60	2.40	-
SEME640250230E	R0.2	2.5	4	4	30	70	2.40	-
SEME640250308E	R0.3	2.5	4	4	8	50	2.40	-
SEME640250310E	R0.3	2.5	4	4	10	50	2.40	-
SEME640250312E	R0.3	2.5	4	4	12	50	2.40	-
SEME640250314E	R0.3	2.5	4	4	14	50	2.40	-
SEME640250316E	R0.3	2.5	4	4	16	50	2.40	-
SEME640250320E	R0.3	2.5	4	4	20	50	2.40	-
SEME640250326E	R0.3	2.5	4	4	26	60	2.40	-
SEME640250330E	R0.3	2.5	4	4	30	70	2.40	-
SEME640250508E	R0.5	2.5	4	4	8	50	2.40	-
SEME640250510E	R0.5	2.5	4	4	10	50	2.40	-
SEME640250512E	R0.5	2.5	4	4	12	50	2.40	-
SEME640250514E	R0.5	2.5	4	4	14	50	2.40	-
SEME640250516E	R0.5	2.5	4	4	16	50	2.40	-
SEME640250520E	R0.5	2.5	4	4	20	50	2.40	-
SEME640250526E	R0.5	2.5	4	4	26	60	2.40	-
SEME640250530E	R0.5	2.5	4	4	30	70	2.40	-
★ SEME640300108E	R0.1	3.0	6	4.5	8	50	2.85	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good


ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETEL**
 () **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
 () **MD, 4 TAGLIENTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

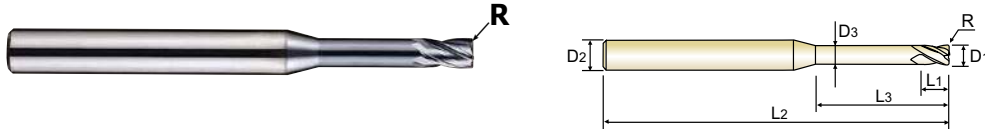

D<ø3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
★ SEME640300110E	R0.1	3.0	6	4.5	10	50	2.85	-
★ SEME640300112E	R0.1	3.0	6	4.5	12	50	2.85	-
SEME640300114E	R0.1	3.0	6	4.5	14	60	2.85	-
★ SEME640300116E	R0.1	3.0	6	4.5	16	60	2.85	-
SEME640300120E	R0.1	3.0	6	4.5	20	60	2.85	-
SEME640300126E	R0.1	3.0	6	4.5	26	65	2.85	-
SEME640300130E	R0.1	3.0	6	4.5	30	70	2.85	-
SEME640300135E	R0.1	3.0	6	4.5	35	70	2.85	-
SEME640300140E	R0.1	3.0	6	4.5	40	80	2.85	-
SEME640300208E	R0.2	3.0	6	4.5	8	50	2.85	-
★ SEME640300210E	R0.2	3.0	6	4.5	10	50	2.85	-
★ SEME640300212E	R0.2	3.0	6	4.5	12	50	2.85	-
SEME640300214E	R0.2	3.0	6	4.5	14	60	2.85	-
★ SEME640300216E	R0.2	3.0	6	4.5	16	60	2.85	-
SEME640300218E	R0.2	3.0	6	4.5	18	60	2.85	-
★ SEME640300220E	R0.2	3.0	6	4.5	20	60	2.85	-
SEME640300226E	R0.2	3.0	6	4.5	26	65	2.85	-
SEME640300230E	R0.2	3.0	6	4.5	30	70	2.85	-
SEME640300235E	R0.2	3.0	6	4.5	35	70	2.85	-
SEME640300240E	R0.2	3.0	6	4.5	40	80	2.85	-
★ SEME640300308E	R0.3	3.0	6	4.5	8	50	2.85	-
★ SEME640300310E	R0.3	3.0	6	4.5	10	50	2.85	-
★ SEME640300312E	R0.3	3.0	6	4.5	12	50	2.85	-
★ SEME640300314E	R0.3	3.0	6	4.5	14	60	2.85	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	◎	◎


YG 4G MILL END MILLS

PLAIN SHANK **SEME64** SERIES

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETL**
● **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
● **MD, 4 TAGLIANTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
 - ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
 - ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
 - ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
 - ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern $\geq 3,0\text{mm } \phi$ werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

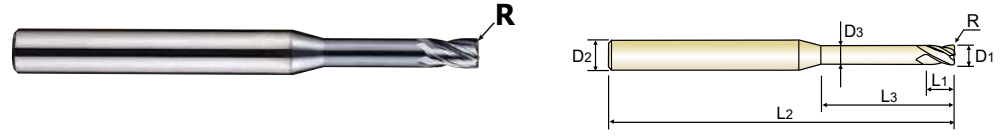

CARBIDE
4
27°/30°
R
PLAIN
P.302-305

Dϕ3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
★ SEME640300316E	R0.3	3.0	6	4.5	16	60	2.85	-
★ SEME640300320E	R0.3	3.0	6	4.5	20	60	2.85	-
SEME640300326E	R0.3	3.0	6	4.5	26	65	2.85	-
SEME640300330E	R0.3	3.0	6	4.5	30	70	2.85	-
SEME640300335E	R0.3	3.0	6	4.5	35	70	2.85	-
SEME640300340E	R0.3	3.0	6	4.5	40	80	2.85	-
★ SEME640300508E	R0.5	3.0	6	4.5	8	50	2.85	-
★ SEME640300510E	R0.5	3.0	6	4.5	10	50	2.85	-
★ SEME640300512E	R0.5	3.0	6	4.5	12	50	2.85	-
SEME640300514E	R0.5	3.0	6	4.5	14	60	2.85	-
★ SEME640300516E	R0.5	3.0	6	4.5	16	60	2.85	-
★ SEME640300520E	R0.5	3.0	6	4.5	20	60	2.85	-
★ SEME640300526E	R0.5	3.0	6	4.5	26	65	2.85	-
★ SEME640300530E	R0.5	3.0	6	4.5	30	70	2.85	-
SEME640300535E	R0.5	3.0	6	4.5	35	70	2.85	-
SEME640300540E	R0.5	3.0	6	4.5	40	80	2.85	-
★ SEME640301008E	R1.0	3.0	6	4.5	8	50	2.85	-
★ SEME640301010E	R1.0	3.0	6	4.5	10	50	2.85	-
★ SEME640301012E	R1.0	3.0	6	4.5	12	50	2.85	-
SEME640301014E	R1.0	3.0	6	4.5	14	60	2.85	-
★ SEME640301016E	R1.0	3.0	6	4.5	16	60	2.85	-
★ SEME640301020E	R1.0	3.0	6	4.5	20	60	2.85	-
SEME640301026E	R1.0	3.0	6	4.5	26	65	2.85	-
★ SEME640301030E	R1.0	3.0	6	4.5	30	70	2.85	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	◎	○

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

- VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETEL
- () Fraise carbure, 4 dents, torique, hélice multiple, détalonnée
- () MD, 4 TAGLIENTI, SCARICATA, TORICA

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

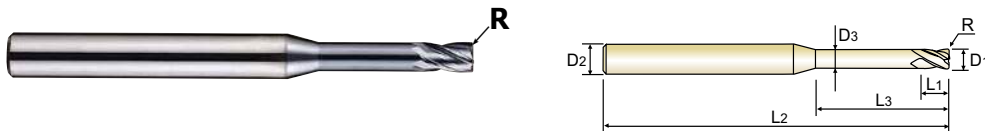

D<Ø3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME640301035E	R1.0	3.0	6	4.5	35	70	2.85	-
SEME640301040E	R1.0	3.0	6	4.5	40	80	2.85	-
★ SEME640400110E	R0.1	4.0	6	6	10	50	3.85	-
★ SEME640400112E	R0.1	4.0	6	6	12	50	3.85	-
SEME640400114E	R0.1	4.0	6	6	14	60	3.85	-
★ SEME640400116E	R0.1	4.0	6	6	16	60	3.85	-
★ SEME640400120E	R0.1	4.0	6	6	20	60	3.85	-
SEME640400126E	R0.1	4.0	6	6	26	65	3.85	-
SEME640400130E	R0.1	4.0	6	6	30	70	3.85	-
SEME640400135E	R0.1	4.0	6	6	35	70	3.85	-
SEME640400140E	R0.1	4.0	6	6	40	80	3.85	-
SEME640400145E	R0.1	4.0	6	6	45	90	3.85	-
SEME640400150E	R0.1	4.0	6	6	50	100	3.85	-
★ SEME640400210E	R0.2	4.0	6	6	10	50	3.85	-
★ SEME640400212E	R0.2	4.0	6	6	12	50	3.85	-
SEME640400214E	R0.2	4.0	6	6	14	60	3.85	-
★ SEME640400216E	R0.2	4.0	6	6	16	60	3.85	-
★ SEME640400220E	R0.2	4.0	6	6	20	60	3.85	-
SEME640400224E	R0.2	4.0	6	6	24	65	3.85	-
★ SEME640400226E	R0.2	4.0	6	6	26	65	3.85	-
SEME640400230E	R0.2	4.0	6	6	30	70	3.85	-
SEME640400235E	R0.2	4.0	6	6	35	70	3.85	-
SEME640400240E	R0.2	4.0	6	6	40	80	3.85	-
SEME640400245E	R0.2	4.0	6	6	45	90	3.85	-

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	15	30	25	38	34	15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB	60	100	75	90	130	110	90	100										550	630	400	550
Recommend																		○	◎	◎	○


YG 4G MILL END MILLS

PLAIN SHANK **SEME64** SERIES

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

🇩🇪 **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETL**
🇫🇷 **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
🇮🇹 **MD, 4 TAGLIANTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
 - ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
 - ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
 - ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
 - ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern $\geq 3,0\text{mm } \phi$ werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

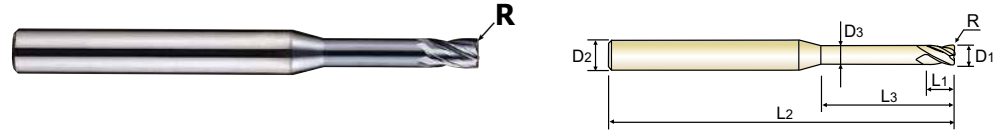

CARBIDE 4 27°/30° ±0.02 PLAIN P.302-305
 Dϕ3, 30° HELIX

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME640400250E	R0.2	4.0	6	6	50	100	3.85	-
★ SEME640400310E	R0.3	4.0	6	6	10	50	3.85	-
★ SEME640400312E	R0.3	4.0	6	6	12	50	3.85	-
★ SEME640400314E	R0.3	4.0	6	6	14	60	3.85	-
★ SEME640400316E	R0.3	4.0	6	6	16	60	3.85	-
★ SEME640400320E	R0.3	4.0	6	6	20	60	3.85	-
★ SEME640400326E	R0.3	4.0	6	6	26	65	3.85	-
SEME640400330E	R0.3	4.0	6	6	30	70	3.85	-
SEME640400335E	R0.3	4.0	6	6	35	70	3.85	-
SEME640400340E	R0.3	4.0	6	6	40	80	3.85	-
SEME640400345E	R0.3	4.0	6	6	45	90	3.85	-
SEME640400350E	R0.3	4.0	6	6	50	100	3.85	-
★ SEME640400510E	R0.5	4.0	6	6	10	50	3.85	-
★ SEME640400512E	R0.5	4.0	6	6	12	50	3.85	-
★ SEME640400514E	R0.5	4.0	6	6	14	60	3.85	-
★ SEME640400516E	R0.5	4.0	6	6	16	60	3.85	-
★ SEME640400520E	R0.5	4.0	6	6	20	60	3.85	-
★ SEME640400526E	R0.5	4.0	6	6	26	65	3.85	-
★ SEME640400530E	R0.5	4.0	6	6	30	70	3.85	-
★ SEME640400535E	R0.5	4.0	6	6	35	70	3.85	-
★ SEME640400540E	R0.5	4.0	6	6	40	80	3.85	-
SEME640400545E	R0.5	4.0	6	6	45	90	3.85	-
SEME640400550E	R0.5	4.0	6	6	50	100	3.85	-
★ SEME640401010E	R1.0	4.0	6	6	10	50	3.85	-

★ : Stock Item ▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M			K					
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron	Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○


ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○	○	○	◎	○

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETEL**
 (●) **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
 (●) **MD, 4 TAGLIENTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.



CARBIDE 4 27°/30° ±0.02 PLAIN P.302-305

D<ø3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
★ SEME640401012E	R1.0	4.0	6	6	12	50	3.85	-
SEME640401014E	R1.0	4.0	6	6	14	60	3.85	-
★ SEME640401016E	R1.0	4.0	6	6	16	60	3.85	-
★ SEME640401020E	R1.0	4.0	6	6	20	60	3.85	-
★ SEME640401026E	R1.0	4.0	6	6	26	65	3.85	-
★ SEME640401030E	R1.0	4.0	6	6	30	70	3.85	-
SEME640401035E	R1.0	4.0	6	6	35	70	3.85	-
SEME640401040E	R1.0	4.0	6	6	40	80	3.85	-
SEME640401045E	R1.0	4.0	6	6	45	90	3.85	-
SEME640401050E	R1.0	4.0	6	6	50	100	3.85	-
SEME6405001E	R0.1	5.0	6	8	15	60	4.85	-
SEME6405002E	R0.2	5.0	6	8	15	60	4.85	-
SEME6405003E	R0.3	5.0	6	8	15	60	4.85	-
SEME6405005E	R0.5	5.0	6	8	15	60	4.85	-
SEME6405010E	R1.0	5.0	6	8	15	60	4.85	-
SEME6405015E	R1.5	5.0	6	8	15	60	4.85	-
SEME6405020E	R2.0	5.0	6	8	15	60	4.85	-
SEME6406001E	R0.1	6.0	6	9	20	60	5.85	Regular
★ SEME6406002E	R0.2	6.0	6	9	20	60	5.85	Regular
★ SEME6406003E	R0.3	6.0	6	9	20	60	5.85	Regular
★ SEME6406005E	R0.5	6.0	6	9	20	60	5.85	Regular
★ SEME6406010E	R1.0	6.0	6	9	20	60	5.85	Regular
SEME6406015E	R1.5	6.0	6	9	20	60	5.85	Regular
SEME6406020E	R2.0	6.0	6	9	20	60	5.85	Regular

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	

ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		○	◎	◎	○


YG 4G MILL END MILLS

PLAIN SHANK **SEME64** SERIES

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETL**
● **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
● **MD, 4 TAGLIANTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
 - ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
 - ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.
- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
 - ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
 - ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern $\geq 3,0\text{mm } \phi$ werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.

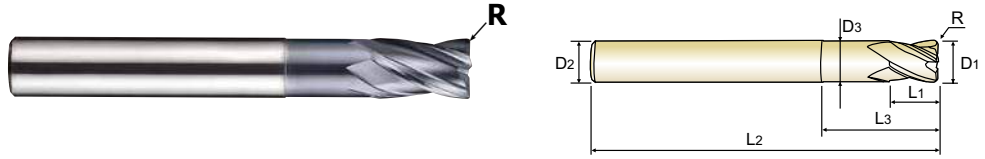

CARBIDE
4
27°/30°
R
PLAIN
P.302-305

Dϕ3, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
★ SEME6406003090E	R0.3	6.0	6	15	30	90	5.85	Long Shank
SE5E640600524LE	R0.5	6.0	6	9	24	90	5.85	-
★ SEME6406005090E	R0.5	6.0	6	15	30	90	5.85	Long Shank
★ SEME6406010090E	R1.0	6.0	6	15	30	90	5.85	Long Shank
SEME6408001E	R0.1	8.0	8	12	25	70	7.70	Regular
★ SEME6408002E	R0.2	8.0	8	12	25	70	7.70	Regular
★ SEME6408003E	R0.3	8.0	8	12	25	70	7.70	Regular
★ SEME6408005E	R0.5	8.0	8	12	25	70	7.70	Regular
★ SEME6408010E	R1.0	8.0	8	12	25	70	7.70	Regular
SEME6408015E	R1.5	8.0	8	12	25	70	7.70	Regular
SEME6408020E	R2.0	8.0	8	12	25	70	7.70	Regular
SEME6408003100E	R0.3	8.0	8	20	35	100	7.70	Long Shank
★ SEME6408005100E	R0.5	8.0	8	20	35	100	7.70	Long Shank
★ SEME6408010100E	R1.0	8.0	8	20	35	100	7.70	Long Shank
SEME6410001E	R0.1	10.0	10	15	30	75	9.70	Regular
SEME6410002E	R0.2	10.0	10	15	30	75	9.70	Regular
SEME6410003E	R0.3	10.0	10	15	30	75	9.70	Regular
★ SEME6410005E	R0.5	10.0	10	15	30	75	9.70	Regular
★ SEME6410010E	R1.0	10.0	10	15	30	75	9.70	Regular
★ SEME6410015E	R1.5	10.0	10	15	30	75	9.70	Regular
SEME6410020E	R2.0	10.0	10	15	30	75	9.70	Regular
SEME6410003100E	R0.3	10.0	10	25	40	100	9.70	Long Shank
★ SEME6410005100E	R0.5	10.0	10	25	40	100	9.70	Long Shank
★ SEME6410010100E	R1.0	10.0	10	25	40	100	9.70	Long Shank

★ : Stock Item

▶ NEXT PAGE

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good


ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel		Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	◎	○

CARBIDE, 4 FLUTE MULTIPLE HELIX CORNER RADIUS with EXTENDED NECK

● **VOLLHARTMETALL, 4 SCHNEIDEN MEHRSPIRAL ECKENRADIUS mit ABGESETZTEM SCHAFTTETEL**
 (●) **Fraise carbure, 4 dents, torique, hélice multiple, détalonnée**
 (●) **MD, 4 TAGLIENTI, SCARICATA, TORICA**

- ▶ New coating and tool geometry applied resulting outstanding cutting abilities and wear resistance.
- ▶ Excellent performance when cutting prehardened steels, up to HRC55 which are used for molds & dies.
- ▶ Multiple Helix for 3.0mm and over 3.0mm diameter endmills minimizing vibration and decreasing wear in cutting.

- ▶ Aufgrund einer neuartigen Beschichtung und neuer Werkzeuggeometrien hervorragende Schnittleistung und Verschleißfestigkeit
- ▶ Hervorragende Leistung bei der Zerspaltung von vorvergüteten Stählen bis HRC55, welche im Werkzeug- und Formenbau Verwendung finden.
- ▶ Aufgrund der Multi-Helix (M-Helix) bei Schaftfräsern ≥ 3,0mm ø werden Vibrationen zuverlässig verhindert und gleichzeitig der Schneidkantenverschleiß verringert.



CARBIDE 4 27°/30° ±0.02 PLAIN P.302-305

D<03, 30° HELIX

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Remark
	R	D1	D2	L1	L3	L2	D3	
SEME6412002E	R0.2	12.0	12	18	32	80	11.70	Regular
SEME6412003E	R0.3	12.0	12	18	32	80	11.70	Regular
★ SEME6412005E	R0.5	12.0	12	18	32	80	11.70	Regular
★ SEME6412010E	R1.0	12.0	12	18	32	80	11.70	Regular
★ SEME6412015E	R1.5	12.0	12	18	32	80	11.70	Regular
★ SEME6412020E	R2.0	12.0	12	18	32	80	11.70	Regular
SEME6412003110E	R0.3	12.0	12	30	50	110	11.70	Long Shank
★ SEME6412005110E	R0.5	12.0	12	30	50	110	11.70	Long Shank
★ SEME6412010110E	R1.0	12.0	12	30	50	110	11.70	Long Shank
★ SEME6416005E	R0.5	16.0	16	20	35	100	15.70	Regular
★ SEME6416010E	R1.0	16.0	16	20	35	100	15.70	Regular
SEME6416005150E	R0.5	16.0	16	35	50	150	15.70	Long Shank
SEME6416010150E	R1.0	16.0	16	35	50	150	15.70	Long Shank
★ SEME6420005E	R0.5	20.0	20	35	40	100	19.70	Regular
★ SEME6420010E	R1.0	20.0	20	35	40	100	19.70	Regular
SEME6420005150E	R0.5	20.0	20	35	55	150	19.70	Long Shank
SEME6420010150E	R1.0	20.0	20	35	55	150	19.70	Long Shank

★ : Stock Item

Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
± 0.02	0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	125	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	◎	◎	◎	◎	○	◎	◎	◎	○	◎				○	○	○	○	○	○	


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																○	○	○	◎	○	○


SEME64 SERIES 4 FLUTE CORNER RADIUS - **SIDE CUTTING**

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ae = mm LBS = Length Below Shank

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)																																																																																								
				1.0		1.0		1.0		1.0		1.0		1.0		1.2		1.2		1.2																																																																								
				LBS	4	6	8	10	12	16	20	22	26	3	4	6	8	10	12	16																																																																								
P	1-5	Non-alloy steel	Vc	104	94	94	94	83	62	62	31	112	112	112	101	101	101	90	fz	0.003	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.002	RPM	33104	29921	29921	29921	26420	19735	19735	9868	9868	29709	29709	29709	26791	26791	26791	23873	FEED	397	239	239	239	211	158	158	79	79	357	357	357	321	321	321	191	Ae	0.021	0.012	0.012	0.008	0.008	0.005	0.003	0.003	0.003	0.003	0.036	0.025	0.025	0.014	0.009	0.009	0.005						
			6-8	Low alloy steel	Vc	104	94	94	94	83	62	62	31	112	112	112	101	101	101	90	fz	0.003	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	RPM	33104	29921	29921	29921	26420	19735	19735	9868	9868	29709	29709	29709	26791	26791	26791	23873	FEED	397	239	239	239	211	158	158	79	79	357	357	357	321	321	321	191	Ae	0.021	0.012	0.012	0.008	0.008	0.005	0.003	0.003	0.003	0.003	0.036	0.025	0.025	0.014	0.009	0.009	0.005			
					9	High alloyed steel, and tool steel	Vc	68	61	61	61	54	41	41	20	20	71	71	71	64	64	64	57	fz	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	RPM	21645	19417	19417	19417	17189	13051	13051	6366	6366	18833	18833	18833	16977	16977	16977	15120	FEED	260	233	233	233	138	104	104	51	51	301	301	301	204	204	204	181	Ae	0.016	0.009	0.009	0.006	0.006	0.003	0.002	0.002	0.002	0.027	0.01	0.019	0.011	0.007	0.007	0.007	0.004
							10-11.1	High alloyed steel, and tool steel	Vc	104	94	94	94	83	62	62	31	112	112	112	101	101	101	90	fz	0.003	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	RPM	33104	29921	29921	29921	26420	19735	19735	9868	9868	29709	29709	29709	26791	26791	26791	23873	FEED	397	239	239	239	211	158	158	79	79	357	357	357	321	321	321	191	Ae	0.021	0.012	0.012	0.008	0.008	0.005	0.003	0.003	0.003	0.003	0.036	0.025	0.025	0.014	0.009	0.009
	11.2	High alloyed steel, and tool steel							Vc	68	61	61	61	54	41	41	20	20	71	71	71	64	64	64	57	fz	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	RPM	21645	19417	19417	19417	17189	13051	13051	6366	6366	18833	18833	18833	16977	16977	16977	15120	FEED	260	233	233	233	138	104	104	51	51	301	301	301	204	204	204	181	Ae	0.016	0.009	0.009	0.006	0.006	0.003	0.002	0.002	0.002	0.027	0.01	0.019	0.011	0.007	0.007
			K 15-20	Grey cast iron Nodular cast iron Malleable cast iron					Vc	104	94	94	94	83	62	62	31	112	112	112	101	101	101	90	fz	0.003	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	RPM	33104	29921	29921	29921	26420	19735	19735	9868	9868	29709	29709	29709	26791	26791	26791	23873	FEED	397	239	239	239	211	158	158	79	79	357	357	357	321	321	321	191	Ae	0.021	0.012	0.012	0.008	0.008	0.005	0.003	0.003	0.003	0.003	0.036	0.025	0.025	0.014	0.009	0.009
					H 38.1 - 38.2	Hardened steel			Vc	41	37	37	37	33	25	25	12	12	44	44	44	40	40	40	35	fz	0.003	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	RPM	13051	11777	11777	11777	10504	7958	7958	3820	3820	11671	11671	11671	10610	10610	10610	9284	FEED	157	94	94	94	84	64	64	31	31	140	140	140	127	127	127	74	Ae	0.013	0.007	0.007	0.005	0.005	0.003	0.002	0.002	0.002	0.022	0.015	0.015	0.009	0.005	0.005
							H 40	Chilled Cast Iron	Vc	68	61	61	61	54	41	41	20	20	71	71	71	64	64	64	57	fz	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	RPM	21645	19417	19417	19417	17189	13051	13051	6366	6366	18833	18833	18833	16977	16977	16977	15120	FEED	260	233	233	233	138	104	104	51	51	301	301	301	204	204	204	181	Ae	0.016	0.009	0.009	0.006	0.006	0.003	0.002	0.002	0.002	0.027	0.01	0.019	0.011	0.007	0.007
	H 41	Hardened Cast Iron							Vc	41	37	37	37	33	25	25	12	12	44	44	44	40	40	40	35	fz	0.003	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	RPM	13051	11777	11777	11777	10504	7958	7958	3820	3820	11671	11671	11671	10610	10610	10610	9284	FEED	157	94	94	94	84	64	64	31	31	140	140	140	127	127	127	74	Ae	0.013	0.007	0.007	0.005	0.005	0.003	0.002	0.002	0.002	0.022	0.015	0.015	0.009	0.005	0.005

▶ NEXT PAGE





4G MILL END MILLS


RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

SEME64 SERIES 4 FLUTE CORNER RADIUS - SIDE CUTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ae = mm LBS = Length Below Shank

VDI 3323	Parameter	Diameter (Ø)																					
		1.2	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.5		
	LBS	20	4	6	8	10	12	14	16	20	22	26	6	8	10	12	14	16	20	22	26	30	8
1-5	Vc	67	124	124	112	112	112	112	100	100	100	75	136	136	136	122	122	122	122	109	109	109	141
	fz	0.002	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.005
	RPM	17772	26314	26314	23767	23767	23767	23767	21221	21221	21221	15915	21645	21645	21645	19417	19417	19417	19417	17348	17348	17348	17953
	FEED	142	421	421	285	285	285	285	255	255	255	127	346	346	346	311	311	311	311	278	278	278	359
6-8	Vc	67	124	124	112	112	112	112	100	100	100	75	136	136	136	122	122	122	122	109	109	109	141
	fz	0.002	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.005
	RPM	17772	26314	26314	23767	23767	23767	23767	21221	21221	21221	15915	21645	21645	21645	19417	19417	19417	19417	17348	17348	17348	17953
	FEED	142	421	421	285	285	285	285	255	255	255	127	346	346	346	311	311	311	311	278	278	278	359
9	Vc	43	76	76	69	69	69	69	61	61	61	46	87	87	87	78	78	78	78	69	69	69	90
	fz	0.002	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.007
	RPM	11406	16128	16128	14642	14642	14642	14642	12945	12945	12945	9762	13846	13846	13846	12414	12414	12414	12414	10982	10982	10982	11459
	FEED	91	258	258	234	234	234	234	155	155	155	117	277	277	277	248	248	248	248	176	176	176	321
10 - 11.1	Vc	67	124	124	112	112	112	112	100	100	100	75	136	136	136	122	122	122	122	109	109	109	141
	fz	0.002	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.005
	RPM	17772	26314	26314	23767	23767	23767	23767	21221	21221	21221	15915	21645	21645	21645	19417	19417	19417	19417	17348	17348	17348	17953
	FEED	142	421	421	285	285	285	285	255	255	255	127	346	346	346	311	311	311	311	278	278	278	359
11.2 - 15 - 20	Vc	43	76	76	69	69	69	69	61	61	61	46	87	87	87	78	78	78	78	69	69	69	90
	fz	0.002	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.007
	RPM	11406	16128	16128	14642	14642	14642	14642	12945	12945	12945	9762	13846	13846	13846	12414	12414	12414	12414	10982	10982	10982	11459
	FEED	91	258	258	234	234	234	234	155	155	155	117	277	277	277	248	248	248	248	176	176	176	321
38.1 - 38.2	Vc	26	48	48	43	43	43	43	38	38	38	29	54	54	54	49	49	49	49	43	43	43	57
	fz	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.005
	RPM	6897	10186	10186	9125	9125	9125	9125	8064	8064	8064	6154	8594	8594	8594	7799	7799	7799	7799	6844	6844	6844	7257
	FEED	55	122	122	109	109	109	109	97	97	97	49	138	138	138	125	125	125	125	82	82	82	145
40	Vc	26	48	48	43	43	43	43	38	38	38	29	54	54	54	49	49	49	49	43	43	43	57
	fz	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.005
	RPM	6897	10186	10186	9125	9125	9125	9125	8064	8064	8064	6154	8594	8594	8594	7799	7799	7799	7799	6844	6844	6844	7257
	FEED	55	122	122	109	109	109	109	97	97	97	49	138	138	138	125	125	125	125	82	82	82	145
41	Vc	26	48	48	43	43	43	43	38	38	38	29	54	54	54	49	49	49	49	43	43	43	57
	fz	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.005
	RPM	6897	10186	10186	9125	9125	9125	9125	8064	8064	8064	6154	8594	8594	8594	7799	7799	7799	7799	6844	6844	6844	7257
	FEED	55	122	122	109	109	109	109	97	97	97	49	138	138	138	125	125	125	125	82	82	82	145

▶ NEXT PAGE



HSS

CBN
END MILLS

i-Xmill
END MILLS

i-SMART
MODULAR
END MILLS

X5070
END MILLS

4G MILL
END MILLS

X-POWER
PRO
END MILLS

TitaNox-
POWER
END MILLS

JET-POWER
END MILLS

V7 PLUS
END MILLS

ALU-POWER
HPC
END MILLS

ALU-
POWER
END MILLS

D-POWER
GRAPHITE
END MILLS

D-POWER
CFRP
END MILLS

ROUTERS

CRX S
END MILLS

K-2
END MILLS

ONLY ONE
COATED PM60
END MILLS

TANK-
POWER
END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA



4G MILL END MILLS


RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

SEME64 SERIES 4 FLUTE CORNER RADIUS - SIDE CUTTING

Vc = m/min. fz = mm/tooth
RPM = rev./min. FEED = mm/min.
Ae = mm LBS = Length Below Shank

ISO	VDI 3323	Parameter	Diameter (Ø)																		
			2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	4.0	4.0
			LBS	10	12	14	16	20	26	30	8	10	12	14	16	20	26	30	35	40	10
P	1-5	Vc	141	141	127	127	127	113	113	150	150	150	150	135	135	135	135	120	120	161	161
		fz	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.01	0.01
		RPM	17953	17953	16170	16170	16170	14388	14388	15915	15915	15915	15915	14324	14324	14324	14324	12732	12732	12812	12812
	6-8	FEED	359	359	323	323	323	230	230	382	382	382	382	344	344	344	344	255	255	512	512
		Ae	0.053	0.053	0.03	0.03	0.03	0.019	0.019	0.09	0.063	0.063	0.063	0.036	0.036	0.036	0.023	0.023	0.014	0.12	0.12
		Vc	141	141	127	127	127	113	113	150	150	150	150	135	135	135	135	120	120	161	161
	9	fz	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.01	0.01
		RPM	17953	17953	16170	16170	16170	14388	14388	15915	15915	15915	15915	14324	14324	14324	14324	12732	12732	12812	12812
		FEED	359	359	323	323	323	230	230	382	382	382	382	344	344	344	344	255	255	512	512
	10-11.1	Ae	0.053	0.053	0.03	0.03	0.03	0.019	0.019	0.09	0.063	0.063	0.063	0.036	0.036	0.036	0.023	0.023	0.014	0.12	0.12
		Vc	141	141	127	127	127	113	113	150	150	150	150	135	135	135	135	120	120	161	161
		fz	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.01	0.01
11.2	RPM	17953	17953	16170	16170	16170	14388	14388	15915	15915	15915	15915	14324	14324	14324	14324	12732	12732	12812	12812	
	FEED	359	359	323	323	323	230	230	382	382	382	382	344	344	344	344	255	255	512	512	
	Ae	0.053	0.053	0.03	0.03	0.03	0.019	0.019	0.09	0.063	0.063	0.063	0.036	0.036	0.036	0.023	0.023	0.014	0.12	0.12	
K	15-20	Vc	90	90	81	81	81	72	72	97	97	97	97	87	87	87	87	78	78	103	103
		fz	0.007	0.007	0.006	0.006	0.006	0.005	0.005	0.008	0.008	0.008	0.008	0.007	0.007	0.007	0.007	0.006	0.006	0.011	0.011
		RPM	11459	11459	10313	10313	10313	9167	9167	10292	10292	10292	10292	9231	9231	9231	9231	8276	8276	8196	8196
H	38.1 - 38.2	FEED	321	321	248	248	248	183	183	329	329	329	329	258	258	258	258	199	199	361	361
		Ae	0.039	0.039	0.023	0.023	0.023	0.014	0.014	0.068	0.047	0.047	0.047	0.027	0.027	0.027	0.017	0.017	0.01	0.09	0.09
		Vc	141	141	127	127	127	113	113	150	150	150	150	135	135	135	135	120	120	161	161
40	fz	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.008	0.008	
	RPM	7257	7257	6621	6621	6621	5857	5857	6260	6260	6260	6260	5623	5623	5623	5623	5093	5093	5173	5173	
	FEED	145	145	132	132	132	94	94	150	150	150	150	112	112	112	112	102	102	166	166	
41	Ae	0.032	0.032	0.018	0.018	0.018	0.011	0.011	0.054	0.038	0.038	0.038	0.022	0.022	0.022	0.014	0.014	0.008	0.072	0.072	
	Vc	90	90	81	81	81	72	72	97	97	97	97	87	87	87	87	78	78	103	103	
	fz	0.007	0.007	0.006	0.006	0.006	0.005	0.005	0.008	0.008	0.008	0.008	0.007	0.007	0.007	0.007	0.006	0.006	0.011	0.011	
41	RPM	11459	11459	10313	10313	10313	9167	9167	10292	10292	10292	10292	9231	9231	9231	9231	8276	8276	8196	8196	
	FEED	321	321	248	248	248	183	183	329	329	329	329	258	258	258	258	199	199	361	361	
	Ae	0.039	0.039	0.023	0.023	0.023	0.014	0.014	0.068	0.047	0.047	0.047	0.027	0.027	0.027	0.017	0.017	0.01	0.09	0.09	
41	Vc	57	57	52	52	52	46	46	59	59	59	59	53	53	53	53	48	48	65	65	
	fz	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.008	0.008	
	RPM	7257	7257	6621	6621	6621	5857	5857	6260	6260	6260	6260	5623	5623	5623	5623	5093	5093	5173	5173	
41	FEED	145	145	132	132	132	94	94	150	150	150	150	112	112	112	112	102	102	166	166	
	Ae	0.032	0.032	0.018	0.018	0.018	0.011	0.011	0.054	0.038	0.038	0.038	0.022	0.022	0.022	0.014	0.014	0.008	0.072	0.072	
	Vc	57	57	52	52	52	46	46	59	59	59	59	53	53	53	53	48	48	65	65	
41	fz	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.005	0.008	0.008	
	RPM	7257	7257	6621	6621	6621	5857	5857	6260	6260	6260	6260	5623	5623	5623	5623	5093	5093	5173	5173	
	FEED	145	145	132	132	132	94	94	150	150	150	150	112	112	112	112	102	102	166	166	
41	Ae	0.032	0.032	0.018	0.018	0.018	0.011	0.011	0.054	0.038	0.038	0.038	0.022	0.022	0.022	0.014	0.014	0.008	0.072	0.072	

▶ NEXT PAGE



SELECTION GUIDE



SERIES	SEMD98	SEM846	SEM846	SEMD99
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS
SIZE MIN	R0.05	R0.05	R0.25	D0.2
SIZE MAX	R12.5	R6.0	R1.0	D20.0
PAGE	166	172	182	185

SOLID CARBIDE
4G Mill
END MILLS

High Speed Cutting for Pre-Hardened Steels up to HRC55

-	EXTENDED NECK	EXTENDED NECK (6mm Shank)	-
Y-Coating	Y-Coating	Y-Coating	Y-Coating



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 276

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc				
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○	○	○
	2		About 0.45% C Annealed	190	13	○	○	○	○
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	◎
	6	Low alloy steel	Annealed	180	10	○	○	○	○
	7		Quenched & Tempered	275	29	◎	◎	◎	◎
	8		Quenched & Tempered	300	32	◎	◎	◎	◎
	9		Quenched & Tempered	350	38	◎	◎	◎	◎
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○	○
	11	Quenched & Tempered		325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15				
	13		Martensitic Quenched & Tempered	240	23				
	14		Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○
	18		Pearlitic	250	25	○	○	○	○
	19	Malleable cast iron	Ferritic	130		○	○	○	○
20	Pearlitic		230	21	○	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60					
	22		Curable Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28		CuSn, lead-free copper and electrolytic copper	100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
36	Titanium Alloys	Pure Titanium	400 Rm						
37		Alpha + Beta Alloys	Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55	○	○	○	○
	39		Hardened	630	60				
	40	Chilled Cast Iron	Cast	400	42	◎	◎	◎	◎
	41	Hardened Cast Iron	Hardened	550	55	○	○	○	○

SEME61	SEME01	SEME64	SEME35	SEME35	SEME35	SEME70	SEM845	SEME36	SEME71	SEME72	SEME73	SEME75
2	4	4	2	2	2	2	2	4	4	4	4	6
30°	27°/30° (MULTIPLE HELIX)	27°/30° (MULTIPLE HELIX)	30°	30°	30°	30°	30°	27°/30° (MULTIPLE HELIX)	35°/38° (MULTIPLE HELIX)	30°	30°	45°
CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE
D0.2	D1.0	D1.0	D0.1	D0.1	D0.1	D1.0	D0.1	D0.8	D1.0	D1.0	D1.0	D6.0
D20.0	D20.0	D20.0	D25.0	D4.0	D3.0	D25.0	D12.0	D25.0	D20.0	D25.0	D12.0	D20.0
193	212	219	234	237	238	239	245	254	256	260	266	271
EXTENDED NECK	-	EXTENDED NECK	-	4mm Shank	3mm Shank	LONG LENGTH	EXTENDED NECK	-	Sharp Corner Removal	LONG LENGTH	EXTENDED NECK	-
Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating



○	○	○	○	○	○	○	○	○	○	○	○	○	1
○	○	⊙	○	○	○	○	○	○	○	○	○	○	2
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	3
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	4
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	5
○	○	○	○	○	○	○	○	○	○	○	○	○	6 P
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	7
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	8
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	9
○	○	○	○	○	○	○	○	○	○	○	○	○	10
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	11
													12
													13 M
			○	○	○	○	○	○	○	○	○	○	14
○	○	○	○	○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	○	○	○	○	17 K
○	○	○	○	○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	○	○	○	○	20
													21
													22
													23
													24
													25 N
													26
													27
													28
													29
													30
													31
													32
													33
													34 S
													35
													36
○	○	○	○	○	○	○	○	○	○	○	○	○	37
○	○	○	○	○	○	○	○	○	○	○	○	○	38
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	39 H
○	○	○	○	○	○	○	○	○	○	○	○	○	40
													41

HSS

CBN
END MILLS

i-Xmill
END MILLS

i-SMART
MODULAR
END MILLS

X5070
END MILLS

**4G MILL
END MILLS**

X-POWER
PRO
END MILLS

TitaNox-
POWER
END MILLS

JET-POWER
END MILLS

V7 PLUS
END MILLS

ALU-POWER
HPC
END MILLS

ALU-
POWER
END MILLS

D-POWER
GRAPHITE
END MILLS

D-POWER
CFRP
END MILLS

ROUTERS

CRX S
END MILLS

K-2
END MILLS

ONLY ONE
COATED PM60
END MILLS

TANK-
POWER
END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA