




DV303 SERIES

DV333 SERIES

HSS-E, CENTER DRILLS / FORM A

- HSS-EX, ZENTRIERBOHRER / FORM A
- Forets HSS-EX à centrer / Forme A
- PUNTE A CENTRARE PER TORNI IN HSS-EX / FORMA A

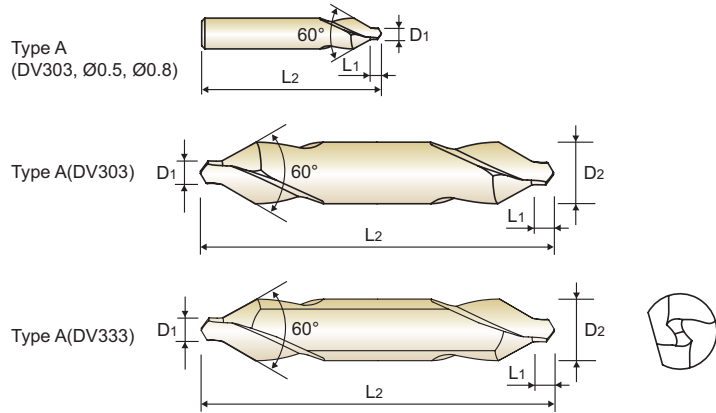

DIN 333 HSS-E h8 k12 120° P.318

FORM A (60°)


| EDP No. | Drill Diameter | | Pilot Length | | Overall Length | |
|----------|----------------|------|--------------|------|----------------|--|
| | D1 | D2 | L1 | L2 | | |
| DV303005 | 0.5 | 3.15 | 0.8 | 25 | | |
| DV303008 | 0.8 | 3.15 | 1.1 | 25 | | |
| DV303010 | 1.0 | 3.15 | 1.3 | 31.5 | | |
| DV303912 | 1.25 | 3.15 | 1.6 | 31.5 | | |
| DV303016 | 1.6 | 4 | 2 | 35.5 | | |
| DV303020 | 2.0 | 5 | 2.5 | 40 | | |
| DV303025 | 2.5 | 6.3 | 3.1 | 45 | | |
| DV303931 | 3.15 | 8 | 3.9 | 50 | | |
| DV303040 | 4.0 | 10 | 5 | 56 | | |
| DV303050 | 5.0 | 12.5 | 6.3 | 63 | | |
| DV303063 | 6.3 | 16 | 8 | 71 | | |

► Under 1.0mm : Single End

FORM A (60°), FLAT

Unit : mm

| EDP No. | Drill Diameter | | Pilot Length | | Overall Length | |
|----------|----------------|------|--------------|------|----------------|--|
| | D1 | D2 | L1 | L2 | | |
| DV333016 | 1.6 | 4 | 2 | 35.5 | | |
| DV333020 | 2.0 | 5 | 2.5 | 40 | | |
| DV333025 | 2.5 | 6.3 | 3.1 | 45 | | |
| DV333931 | 3.15 | 8 | 3.9 | 50 | | |
| DV333040 | 4.0 | 10 | 5 | 56 | | |
| DV333050 | 5.0 | 12.5 | 6.3 | 63 | | |
| DV333063 | 6.3 | 16 | 8 | 71 | | |



| ISO | P | | | | | | | | | | M | | | | K | | | | | | |
|-------------|------------------------|-----|------------------------|-----|-----|---|-----|-----|------------------------|-----|------------------------------------|-----|-----------------|-----|-----------------|-------|-------------------|-------------------|---------------------|-----|-----|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron | | |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ○ | | ◎ | ◎ | ○ | | | | ○ | | | | ◎ | ○ | ○ | | ○ | | |
| ISO | N | | | | | | | | | | S | | | | | | H | | | | |
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400Rm | 1050Rm | 550 | 630 | 400 | 550 |
| Recommended | | | | | | | | | | | | | | | | | | | | | |

◎ : Excellent ○ : Good



CENTER DRILLS

**RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDKONDITIONEN**

DV303, DV333, DV334, D1303, D1343, D1313, D1353, D1363, D1373, DV383 SERIES

HSS & HSS-E, CENTER DRILLS

RPM = rev./min.
FEED = mm/rev.

| ISO | VDI 3323 | Material Description | Vc (m/min) | Parameter | Drill Diameter (mm) | | | | | | | |
|----------|----------|---|------------------------------------|-------------|---------------------|--------------------|--------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| | | | | | 1.0 | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 8.0 | 10.0 |
| P | 1 | Non-alloy steel | 40 | RPM FEED | 12730 0.02-0.04 | 6370 0.03-0.06 | 4240 0.04-0.08 | 3180 0.05-0.09 | 2550 0.06-0.10 | 2120 0.07-0.12 | 1590 0.09-0.15 | 1270 0.12-0.18 |
| | 2 | | 30 | RPM FEED | 9550 0.02-0.04 | 4770 0.03-0.06 | 3180 0.04-0.08 | 2390 0.05-0.09 | 1910 0.06-0.10 | 1590 0.07-0.12 | 1190 0.09-0.15 | 950 0.12-0.18 |
| | 3 | | 25 | RPM FEED | 7960 0.01-0.03 | 3980 0.01-0.035 | 2650 0.015-0.05 | 1990 0.02-0.06 | 1590 0.03-0.07 | 1330 0.04-0.08 | 990 0.06-0.12 | 800 0.08-0.14 |
| | 4 | | | | | | | | | | | |
| | 5 | | | | | | | | | | | |
| | 6 | Low alloy steel | 30 | RPM FEED | 9550 0.02-0.04 | 4770 0.03-0.06 | 3180 0.04-0.08 | 2390 0.05-0.09 | 1910 0.06-0.10 | 1590 0.07-0.12 | 1190 0.09-0.15 | 950 0.12-0.18 |
| | 7 | | 20 | RPM FEED | 6370 0.01-0.03 | 3180 0.01-0.035 | 2120 0.015-0.05 | 1590 0.02-0.06 | 1270 0.03-0.07 | 1060 0.04-0.08 | 800 0.06-0.12 | 640 0.08-0.14 |
| | 8 | | | | | | | | | | | |
| | 9 | | | | | | | | | | | |
| | 10 | | High alloyed steel, and tool steel | | | | | | | | | |
| | 11 | | | | | | | | | | | |
| M | 12 | Stainless steel | 10 | RPM FEED | 3180 0.01-0.03 | 1590 0.01-0.035 | 1060 0.015-0.05 | 800 0.02-0.06 | 640 0.03-0.07 | 530 0.04-0.08 | 400 0.06-0.12 | 320 0.08-0.14 |
| | 13 | | | | | | | | | | | |
| | 14 | | | | | | | | | | | |
| K | 15 | Grey cast iron | 40 | RPM FEED | 12730 0.02-0.04 | 6370 0.03-0.06 | 4240 0.04-0.08 | 3180 0.05-0.09 | 2550 0.06-0.10 | 2120 0.07-0.12 | 1590 0.09-0.15 | 1270 0.12-0.18 |
| | 16 | | 30 | RPM FEED | 9550 0.01-0.03 | 4770 0.01-0.035 | 3180 0.015-0.05 | 2390 0.02-0.06 | 1910 0.03-0.07 | 1590 0.04-0.08 | 1190 0.06-0.12 | 950 0.08-0.14 |
| | 17 | Nodular cast iron | 40 | RPM FEED | 12730 0.02-0.04 | 6370 0.03-0.06 | 4240 0.04-0.08 | 3180 0.05-0.09 | 2550 0.06-0.10 | 2120 0.07-0.12 | 1590 0.09-0.15 | 1270 0.12-0.18 |
| | 18 | | | | | | | | | | | |
| | 19 | | Malleable cast iron | 25 | RPM FEED | 7960 0.02-0.04 | 3980 0.03-0.06 | 2650 0.04-0.08 | 1990 0.05-0.09 | 1590 0.06-0.10 | 1330 0.07-0.12 | 990 0.06-0.12 |
| 20 | | | | | | | | | | | | |
| N | 21 | Aluminum-wrought alloy | | | | | | | | | | |
| | 22 | | | | | | | | | | | |
| | 23 | Aluminum-cast, alloyed | | | | | | | | | | |
| | 24 | | | | | | | | | | | |
| | 25 | | | | | | | | | | | |
| | 26 | Copper and Copper Alloys (Bronze / Brass) | | | | | | | | | | |
| | 27 | | | | | | | | | | | |
| | 28 | | | | | | | | | | | |
| | 29 | Non Metallic Materials | | | | | | | | | | |
| | 30 | | | | | | | | | | | |
| S | 31 | Heat Resistant Super Alloys | | | | | | | | | | |
| | 32 | | | | | | | | | | | |
| | 33 | | | | | | | | | | | |
| | 34 | | | | | | | | | | | |
| | 35 | | | | | | | | | | | |
| | 36 | Titanium Alloys | | | | | | | | | | |
| | 37 | | | | | | | | | | | |
| H | 38 | Hardened steel | | | | | | | | | | |
| | 39 | | | | | | | | | | | |
| | 40 | Chilled Cast Iron | | | | | | | | | | |
| | 41 | Hardened Cast Iron | | | | | | | | | | |

SELECTION GUIDE



SERIES

| D5303 | DV303 | DV333 |
|---------|--------|--------|
| CARBIDE | HSS-E | HSS-E |
| FORM A | FORM A | FORM A |
| D1.0 | D0.5 | D1.6 |
| D6.3 | D6.3 | D6.3 |
| 310 | 311 | 311 |

TOOL MATERIAL

TYPE

SIZE MIN

SIZE MAX


PAGE

SURFACE TREATMENT

Bright

SOLID CARBIDE, HSS & HSS-E CENTER DRILLS

For General Purpose

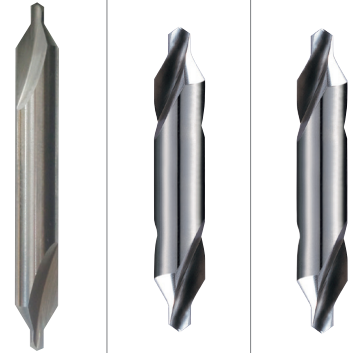

Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.317

| ISO | VDI 3323 | Material Description | Composition / Structure / Heat Treatment | HB | HRc | | | |
|-----|-----------|-----------------------------|--|----------|-----|----|---|---|
| P | 1 | Non-alloy steel | About 0.15% C Annealed | 125 | | ◎ | ◎ | ◎ |
| | 2 | | About 0.45% C Annealed | 190 | 13 | ◎ | ◎ | ◎ |
| | 3 | | About 0.45% C Quenched & Tempered | 250 | 25 | ◎ | ○ | ○ |
| | 4 | | About 0.75% C Annealed | 270 | 28 | | | |
| | 5 | | About 0.75% C Quenched & Tempered | 300 | 32 | | | |
| | 6 | Low alloy steel | Annealed | 180 | 10 | ◎ | ◎ | ◎ |
| | 7 | | Quenched & Tempered | 275 | 29 | ○ | ○ | ○ |
| | 8 | | Quenched & Tempered | 300 | 32 | | | |
| | 9 | | Quenched & Tempered | 350 | 38 | | | |
| | 10 | | High alloyed steel, and tool steel | Annealed | 200 | 15 | | |
| | 11 | Quenched & Tempered | | 325 | 35 | | | |
| M | 12 | Stainless steel | Ferritic / Martensitic Annealed | 200 | 15 | ○ | ○ | ○ |
| | 13 | | Martensitic Quenched & Tempered | 240 | 23 | | | |
| | 14 | Austenitic | 180 | 10 | | | | |
| K | 15 | Grey cast iron | Pearlitic / ferritic | 180 | 10 | ◎ | ◎ | ◎ |
| | 16 | | Pearlitic (Martensitic) | 260 | 26 | ○ | ○ | ○ |
| | 17 | Nodular cast iron | Ferritic | 160 | 3 | ○ | ○ | ○ |
| | 18 | | Pearlitic | 250 | 25 | | | |
| | 19 | Malleable cast iron | Ferritic | 130 | | ○ | ○ | ○ |
| 20 | Pearlitic | | 230 | 21 | | | | |
| N | 21 | Aluminum-wrought alloy | Not Curable | 60 | | | | |
| | 22 | | Curable Hardened | 100 | | | | |
| | 23 | Aluminum-cast, alloyed | ≤ 12% Si, Not Curable | 75 | | | | |
| | 24 | | ≤ 12% Si, Curable Hardened | 90 | | | | |
| | 25 | | > 12% Si, Not Curable | 130 | | | | |
| | 26 | Copper and Copper Alloys | Cutting Alloys, PB>1% | 110 | | | | |
| | 27 | | CuZn, CuSnZn (Brass) | 90 | | | | |
| | 28 | (Bronze / Brass) | CuSn, lead-free copper and electrolytic copper | 100 | | | | |
| | 29 | Non Metallic Materials | Duroplastic, Fiber Reinforced Plastic | | | | | |
| | 30 | | Rubber, Wood, etc. | | | | | |
| S | 31 | Heat Resistant Super Alloys | Fe Based Annealed | 200 | 15 | | | |
| | 32 | | Cured | 280 | 30 | | | |
| | 33 | | Annealed | 250 | 25 | | | |
| | 34 | Titanium Alloys | Ni or Co Based Cured | 350 | 38 | | | |
| | 35 | | Cast | 320 | 34 | | | |
| | 36 | | Pure Titanium | 400 Rm | | | | |
| | 37 | | Alpha + Beta Alloys Hardened | 1050 Rm | | | | |
| H | 38 | Hardened steel | Hardened | 550 | 55 | | | |
| | 39 | | Hardened | 630 | 60 | | | |
| | 40 | Chilled Cast Iron | Cast | 400 | 42 | | | |
| | 41 | Hardened Cast Iron | Hardened | 550 | 55 | | | |