
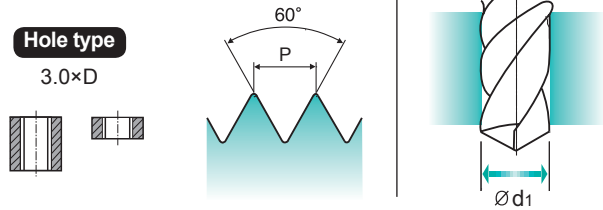


UNC Unified coarse threads
 Unified Grobgewinde
 UNC
 Unificato passo grosso

► For using multi-purpose and correct thread profiles & long tool life due to special tap geometry. YG-1 company has a patent.

► Für vielfältigen Einsatz, genaue Gewindeprofile und lange Standzeit dank einer besonderen Schneidengeometrie. Von YG-1 patentiert.

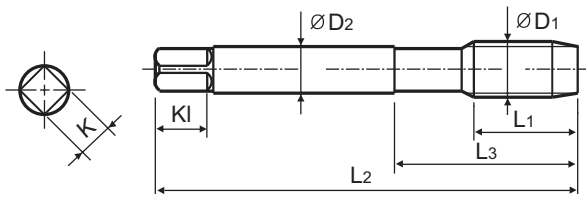

Material groups: **MU** HSS-E DIN 371/376 3B 60° B Bright TiN

Machine taps
Maschinengewindebohrer

Recommended Cutting Page : P.116

Unit : mm

SIZE	TPI	EDP No.		Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
		Bright	TiN								
#4	-40 UNC	TCJ01162	TDJ01162	11	56	18	3.5	2.7	6	3	2.3
#5	-40 UNC	TCJ01202	TDJ01202	11	56	18	3.5	2.7	6	3	2.6
#6	-32 UNC	TCJ01242	TDJ01242	12	56	20	4	3	6	3	2.85
#8	-32 UNC	TCJ01282	TDJ01282	13	63	21	4.5	3.4	6	3	3.5
#10	-24 UNC	TCJ01322	TDJ01322	15	70	25	6	4.9	8	3	3.9
#12	-24 UNC	TCJ01362	TDJ01362	16	80	30	6	4.9	8	3	4.5
1/4	-20 UNC	TCJ01402	TDJ01402	17	80	30	7	5.5	8	3	5.2
5/16	-18 UNC	TCJ01442	TDJ01442	20	90	35	8	6.2	9	3	6.6
3/8	-16 UNC	TCJ01482	TDJ01482	22	100	39	9	7	10	3	8
7/16	-14 UNC	TCJ01522	TDJ01522	22	100	40	8	6.2	9	3	9.4
1/2	-13 UNC	TCJ01562	TDJ01562	25	110	44	9	7	10	3	10.75
9/16	-12 UNC	TCJ01602	TDJ01602	26	110	44	11	9	12	3	12.25
5/8	-11 UNC	TCJ01642	TDJ01642	27	110	44	12	9	12	3	13.5
3/4	-10 UNC	TCJ01702	TDJ01702	30	125	50	14	11	14	4	16.5
7/8	-9 UNC	TCJ01742	TDJ01742	32	140	54	18	14.5	17	4	19.5
1	-8 UNC	TCJ01782	TDJ01782	36	160	60	20	16	19	4	22.25

►DIN 371(#4~3/8) and DIN 376(7/16~1)

* The other coating(TiCN or TiAlN) or Surface Treatment(Steam Homo) is available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55
Recommended			◎			◎	◎	◎			◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



COMBO TAPS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDKONDITIONEN

THREAD MILLS					TB744	TC814	TD814	TB814	TCJ05	TDJ05	TBJ05	TCJ06			
	SYNCHRO TAPS					TB754	TC854	TD854	TB854	TCJ09			TDJ09		
COMBO TAPS					TQ744	TC834	TD834	TB834	TCJ01	TDJ01					
YG TAP GENERAL					TQ754	TC874	TD874	TB874	TCJ02	TDJ02					
YG TAP STEEL	ISO	VDI 3323	Material Description	HB	HRc	Vc (m/min)									
YG TAP HARDENED	P	1	Non-alloy steel	125			15-20	20-25	15-20	15-20	20-25	15-20	15-20		
		2		190	13	15-20	15-20	20-25	15-20	15-20	20-25	15-20	15-20		
		3		250	25		12-18	18-24	12-18	12-18	18-24	12-18	12-18		
		4		270	28	10-15	10-15	15-20	10-15	10-15	15-20	10-15	10-15		
		5		300	32		6-10	10-14	6-10	6-10	10-14	6-10	6-10		
		6	Low alloy steel	180	10	10-15	10-15	15-20	10-15	10-15	15-20	10-15	10-15		
		7		275	29	10-15	10-15	15-20	10-15	10-15	15-20	10-15	10-15		
		8		300	32		6-10	10-14	6-10	6-10	10-14	6-10	6-10		
		9		350	38		3-5	5-7	3-5	3-5	5-7	3-5	3-5		
		10		High alloyed steel, and tool steel	200	15		3-5	5-7	3-5	3-5	5-7	3-5	3-5	
		11			325	35									
YG TAP CAST IRON	M	12	Stainless steel	200	15	7-10	7-10	10-15	7-10	7-10	10-15	7-10	7-10		
13		240		23	5-8	5-8	8-11	5-8	5-8	8-11	5-8	5-8			
14		180		10	4-6	4-6	6-8	4-6	4-6	6-8	4-6	4-6			
YG TAP ALU	K	15	Grey cast iron	180	10		10-15	15-20	10-15	10-15	15-20	10-15	10-15		
16		260		26		5-8	8-11	5-8	5-8	8-11	5-8	5-8			
YG TAP Ti Ni		17	Nodular cast iron	160	3		10-15	15-20	10-15	10-15	15-20	10-15	10-15		
18		250		25		5-8	8-11	5-8	5-8	8-11	5-8	5-8			
19		130													
YG TAP FORMING	20	Malleable cast iron	230	21											
NUT TAPS	N	21	Aluminum-wrought alloy	60											
		22		100											
		23	Aluminum-cast, alloyed	75		15-20	20-25	15-20	15-20	20-25	15-20	15-20			
		24		90											
		25		130											
		STI TAPS	26	Copper and Copper Alloys (Bronze / Brass)	110		25-35	35-40	25-35	25-35	35-40	25-35	25-35		
			27		90		8-12	12-17	8-12	8-12	12-17	8-12	8-12		
			PIPE TAPS	28		100		15-20	15-20	20-25	15-20	15-20	20-25	15-20	15-20
				29	Non Metallic Materials										
30															
TECHNICAL DATA	S	31	Heat Resistant Super Alloys	200	15										
		32		280	30										
		33		250	25										
		34		350	38										
		35		320	34										
		36	Titanium Alloys	400 Rm											
		37		1050 Rm											
	H	38	Hardened steel	550	55										
		39		630	60										
		40	Chilled Cast Iron	400	42										
		41	Hardened Cast Iron	550	55										

SURFACE TREATMENT AND COATING

The applied High Speed Steels holds a grant of good wear resistance and toughness. Therefore YG-1 normally delivers taps with bright and unfinished surface. For certain materials, various surface treatments provide higher advantage in machining.

STEAM TEMPERED - Vap

Steam Tempered is a Fe₃O₄-oxyd-coating which reduces friction between the tool and workpiece, also preventing cold welding.

NITRIDING - NI

Recommend surface treatment for machining materials that affect wear abrasion, such as grey cast iron, alu-alloys with high Si-percentages (more than 10%).

Below are the various surface treatments for excellent finish surfaces suitable for many applications. The surface treatments are produced and developed within the company.

TiN-COATING

TiN-coating yields a hardness of approx. 2,300 HV and also a heat resistant up to approx. 600°C. The current coating is an excellent all-round coating for normal applications.

Colour : Golden Coefficient of friction against steel : 0.4

TiCN-COATING

TiCN takes place of TiN when the conditions require the coating to have a different hardness and toughness.

The TiCN brings advantages for machining very difficult steels or cutting interrupted bores.

The TiCN-coating has a hardness of approx. 3,000 HV, but is heat resistance only holds up to approx. 400°C, meaning that the TiCN needs an excellent cooling system for a long service life.

Colour : Blue-Grey Coefficient of friction against steel : 0.4

TiAlN-COATING

A special coating for machining abrasive materials such as grey cast iron, alu-alloys with silicon, fiber reinforced plastics, etc., or machining at high temperatures with insufficient cooling, or at high speeds ≥ 600 m/min. TiAlN has a hardness of approx. 3,000 HV and is heat resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.4

Hardslick-COATING

Hardslick combines the advantages of an extremely hard, thermally stable TiAlN-coating with the sliding and lubricating properties of an outer WC/C(Tungsten carbide/carbon)-coating in a novel way. The Hardslick coating has a hardness of approx. 3,000 HV and is temperature-resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.2

SELECTION GUIDE



HSS-E & HSS-PM COMBO TAPS

For Multi Purpose Tapping
YG-1's Patent



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.114

HOLE TYPE		Max. 3.0xD Through Hole						
TOOL MATERIAL		HSS-E						
CHAMFER LEAD ACC. TO DIN2197		B	B	B	B	B	B	
FLUTE TYPE		Spiral Point	Spiral Point	Spiral Point	Spiral Point	Spiral Point	Spiral Point	
SPIRAL FLUTE ANGLE		-	-	-	-	-	-	
SERIES	M	DIN 371/376	TC814 (P95)	TD814 (P95)	TB814 (P95)	TCJ05 (P96)	TDJ05 (P96)	TBJ05 (P96)
		DIN352						
		DIN357/LONG						
	MF	DIN374	TC854 (P100)	TD854 (P100)	TB854 (P100)	TCJ09 (P102)	TDJ09 (P102)	
		DIN2181						
	UNC	DIN 371/376	TC834 (P109)	TD834 (P109)	TB834 (P109)	TCJ01 (P110)	TDJ01 (P110)	
		DIN351						
	UNF	DIN 371/374	TC874 (P111)	TD874 (P111)	TB874 (P111)	TCJ02 (P112)	TDJ02 (P112)	
		DIN2181						
	BSW	DIN2182/2183						
		DIN351						
	G(BSP)	DIN5156/5157						
	EG-M	DIN 371/376						
	EG-UNC	DIN 371/376						
EG-UNF	DIN 371/374							
SURFACE TREATMENT		Bright	TiN	VAP	Bright	TiN	VAP	
MODEL								

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC	Bright	TiN	VAP	Bright	TiN	VAP	
P	1	Non-alloy steel	About 0.15% C	Annealed	125		○	○	○	○	○	○	
	2		About 0.45% C	Annealed	190	13	◎	◎	◎	◎	◎	◎	
	3		About 0.45% C	Quenched & Tempered	250	25	◎	◎	◎	◎	◎	◎	
	YG TAP Ti Ni	4	Low alloy steel	About 0.75% C	Annealed	270	28	◎	◎	◎	◎	◎	◎
		5		About 0.75% C	Quenched & Tempered	300	32	◎	◎	◎	◎	◎	◎
		6		Annealed	180	10	◎	◎	◎	◎	◎	◎	
		7		Quenched & Tempered	275	29	◎	◎	◎	◎	◎	◎	
	YG TAP FORMING	8	High alloyed steel, and tool steel	Quenched & Tempered	300	32	◎	◎	◎	◎	◎	◎	◎
		9		Quenched & Tempered	350	38	◎	◎	◎	◎	◎	◎	
		10		Annealed	200	15	○	○	○	○	○	○	
		11		Quenched & Tempered	325	35							
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	◎	◎	◎	◎	◎	◎	
	13		Martensitic	Quenched & Tempered	240	23	◎	◎	◎	◎	◎	◎	
	14		Austenitic	180	10	◎	◎	◎	◎	◎	◎		
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	◎	◎	◎	◎		
	16		Pearlitic (Martensitic)	260	26	◎	◎	◎	◎	◎	◎		
	NUT TAPS	17	Nodular cast iron	Ferritic	160	3	◎	◎	◎	◎	◎	◎	
		18		Pearlitic	250	25	◎	◎	◎	◎	◎	◎	
		19		Ferritic	130								
PIPE TAPS	20	Malleable cast iron	Pearlitic	230	21								
	21	Aluminum-wrought alloy	Not Curable	60									
22	Curable		Hardened	100									
23	≤ 12% Si, Not Curable		75		◎	◎	◎	◎	◎	◎			
N	24	Aluminum-cast, alloyed	≤ 12% Si, Curable	Hardened	90								
	25		> 12% Si, Not Curable	130									
	26		Cutting Alloys, PB>1%	110		◎	◎	◎	◎	◎	◎		
	TECHNICAL DATA	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90		◎	◎	◎	◎	◎	◎	
		28		CuSn, lead-free copper and electrolytic copper	100		◎	◎	◎	◎	◎	◎	
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic										
	30	Rubber, Wood, etc.											
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15							
	32		Cured	280	30								
	33		Annealed	250	25								
	34		Ni or Co Based	Cured	350	38							
	35		Cast	320	34								
	Titanium Alloys	36	Pure Titanium	400 Rm									
		37	Alpha + Beta Alloys	Hardened	1050 Rm								
H	38	Hardened steel	Hardened	550	55								
	39		Hardened	630	60								
	40	Chilled Cast Iron	Cast	400	42								
	41	Hardened Cast Iron	Hardened	550	55								