

YG COMBO TAPS




Bright **TCE09** SERIES
TiN **TDE09** SERIES

MF ISO Metric fine threads DIN 13

Metrisches ISO-Feingewinde DIN 13
 ISO MÉTRIQUE PAS FINS DIN13
 ISO Metrico passo fine DIN 13

► For using multi-purpose and correct thread profiles & long tool life due to special tap geometry. YG-1 company has a patent.

► Für vielfältigen Einsatz, genaue Gewindeprofile und lange Standzeitendank einer besonderen Schneidengeometrie. Von YG-1 patentiert.

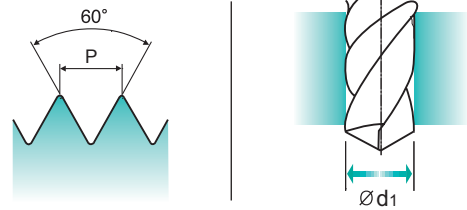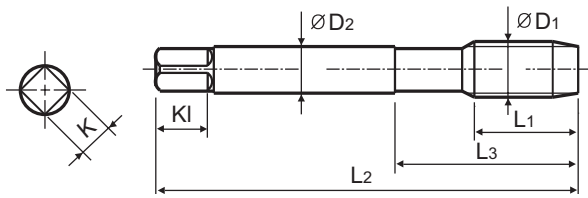

Material groups **MU** HSS-E DIN 374 6G 60° C Bright TiN R40

Machine taps
Maschinengewindebohrer

Recommended Cutting Page : P.114

Unit : mm

SIZE	Pitch	EDP No.		Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
		Bright	TiN								
ØD1	P			L1	L2	L3	ØD2	K	KI	Z	Ød1
M4 × 0.5		TCE09256	TDE09256	5	63	21	2.8	2.1	5	3	3.5
M5 × 0.5		TCE09296	TDE09296	5	70	25	3.5	2.7	6	3	4.5
M6 × 0.75		TCE09326	TDE09326	8	80	30	4.5	3.4	6	3	5.2
M6 × 0.5		TCE09336	TDE09336	5	80	30	4.5	3.4	6	3	5.5
M7 × 0.75		TCE09356	TDE09356	10	80	30	5.5	4.3	7	3	6.2
M8 × 1		TCE09376	TDE09376	10	90	36	6	4.9	8	3	7
M8 × 0.75		TCE09386	TDE09386	8	80	30	6	4.9	8	3	7.2
M10 × 1.25		TCE09436	TDE09436	16	100	40	7	5.5	8	3	8.8
M10 × 1		TCE09446	TDE09446	10	90	36	7	5.5	8	3	9
M10 × 0.75		TCE09456	TDE09456	10	90	36	7	5.5	8	3	9.2
M12 × 1.5		TCE09516	TDE09516	15	100	40	9	7	10	3	10.5
M12 × 1.25		TCE09526	TDE09526	15	100	40	9	7	10	3	10.8
M12 × 1		TCE09536	TDE09536	11	100	40	9	7	10	3	11
M14 × 1.5		TCE09556	TDE09556	15	100	40	11	9	12	3	12.5
M14 × 1.25		TCE09566	TDE09566	15	100	40	11	9	12	3	12.8
M14 × 1		TCE09576	TDE09576	11	100	40	11	9	12	3	13
M16 × 1.5		TCE09616	TDE09616	15	100	40	12	9	12	3	14.5
M16 × 1		TCE09626	TDE09626	12	100	40	12	9	12	3	15
M18 × 1.5		TCE09676	TDE09676	17	110	44	14	11	14	4	16.5
M18 × 1		TCE09686	TDE09686	13	110	44	14	11	14	4	17
M20 × 1.5		TCE09726	TDE09726	17	125	50	16	12	15	4	18.5
M20 × 1		TCE09736	TDE09736	14	125	50	16	12	15	4	19
M22 × 1.5		TCE09766	TDE09766	17	125	50	18	14.5	17	4	20.5
M22 × 1		TCE09776	TDE09776	14	125	50	18	14.5	17	4	21

* The other coating (TiCN or TiAlN) or Surface Treatment (Steam Homo) is available on your request. ► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎		

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended			◎			◎	◎	◎													





MF ISO Metric fine threads DIN 13
 ● Metrisches ISO-Feingewinde DIN 13
 ○ ISO MÉTRIQUE PAS FINS DIN13
 ○ ISO Metrico passo fine DIN 13

► For using multi-purpose and correct thread profiles & long tool life due to special tap geometry. YG-1 company has a patent.

► Für vielfältigen Einsatz, genaue Gewindeprofile und lange Standzeit dank einer besonderen Schneidengeometrie. Von YG-1 patentiert.



Hole type
2.5×D

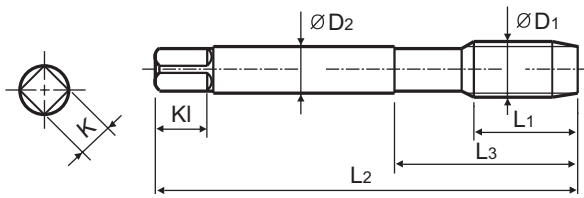

Material groups: **MU** HSS-E DIN 374 6G 60° C Bright TiN R40

Machine taps
Maschinengewindebohrer

Recommended Cutting Page : P.114

Unit : mm

SIZE	Pitch	EDP No.		Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
		Bright	TiN								
M24 × 2		TCE09796	TDE09796	20	140	54	18	14.5	17	4	22
M24 × 1.5		TCE09806	TDE09806	20	140	54	18	14.5	17	4	22.5
M26 × 1.5		TCE09856	TDE09856	20	140	54	18	14.5	17	4	24.5
M27 × 2		TCE09876	TDE09876	20	140	54	20	16	19	4	25
M27 × 1.5		TCE09886	TDE09886	20	140	54	20	16	19	4	25.5
M28 × 1.5		TCE09916	TDE09916	20	140	54	20	16	19	4	26.5
M30 × 2		TCE09966	TDE09966	22	150	57	22	18	21	4	28
M30 × 1.5		TCE09976	TDE09976	22	150	57	22	18	21	4	28.5

* The other coating(TiCN or TiAlN) or Surface Treatment(Steam Homo) is available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎			
ISO	N									S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended			◎			◎	◎	◎													



COMBO TAPS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDKONDITIONEN

THREAD MILLS	SYNCHRO TAPS	COMBO TAPS	TC804 TC844 TC824 TC864	TD804 TD844 TD824 TD864	TB804 TB844 TB824 TB864	TCE05 TCE09 TCE01 TCE02	TDE05 TDE09 TDE01 TDE02	TBE05	TCE06	TDE06							
											ISO	VDI 3323	Material Description	HB	HRc	Vc (m/min)	
YG TAP GENERAL	YG TAP STEEL	YG TAP HARDENED	YG TAP INOX	P	1	Non-alloy steel	125		15-20	20-25	15-20	15-20	20-25	15-20	15-20	20-25	
					2		190	13	15-20	20-25	15-20	15-20	20-25	15-20	15-20	20-25	
					3		250	25	12-18	18-24	12-18	12-18	18-24	12-18	12-18	18-24	
					4		270	28	10-15	15-20	10-15	10-15	15-20	10-15	10-15	15-20	
					5		300	32	6-10	10-14	6-10	6-10	10-14	6-10	6-10	10-14	
					6	Low alloy steel	180	10	10-15	15-20	10-15	10-15	15-20	10-15	10-15	15-20	
					7		275	29	10-15	15-20	10-15	10-15	15-20	10-15	10-15	15-20	
					8		300	32	6-10	10-14	6-10	6-10	10-14	6-10	6-10	10-14	
					9		350	38	3-5	5-7	3-5	3-5	5-7	3-5	3-5	5-7	
					10		High alloyed steel, and tool steel	200	15	3-5	5-7	3-5	3-5	5-7	3-5	3-5	5-7
					11			325	35								
YG TAP CAST IRON	M	12	Stainless steel	200	15	7-10	10-15	7-10	7-10	10-15	7-10	7-10	10-15				
		13		240	23	5-8	8-11	5-8	5-8	8-11	5-8	5-8	8-11				
		14		180	10	4-6	6-8	4-6	4-6	6-8	4-6	4-6	6-8				
YG TAP ALU	K	15	Grey cast iron	180	10	10-15	15-20	10-15	10-15	15-20	10-15	10-15	15-20				
				260	26	5-8	8-11	5-8	5-8	8-11	5-8	5-8	8-11				
		17	Nodular cast iron	160	3	10-15	15-20	10-15	10-15	15-20	10-15	10-15	15-20				
				250	25	5-8	8-11	5-8	5-8	8-11	5-8	5-8	8-11				
				19	130												
20	Malleable cast iron	230	21														
NUT TAPS	N	21	Aluminum-wrought alloy	60													
				100													
		23	Aluminum-cast, alloyed	75		15-20	20-25	15-20	15-20	20-25	15-20	15-20	20-25				
				90													
				130													
		26	Copper and Copper Alloys (Bronze / Brass)	110		25-35	35-40	25-35	25-35	35-40	25-35	25-35	35-40				
				90		8-12	12-17	8-12	8-12	12-17	8-12	8-12	12-17				
		28		100		15-20	20-25	15-20	15-20	20-25	15-20	15-20	20-25				
				29	Non Metallic Materials												
		PIPE TAPS	S	31	Heat Resistant Super Alloys	200	15										
280	30																
250	25																
350	38																
320	34																
36	Titanium Alloys			400 Rm													
				1050 Rm													
TECHNICAL DATA	H	38	Hardened steel	550	55												
				630	60												
		40	Chilled Cast Iron	400	42												
				550	55												

SURFACE TREATMENT AND COATING

The applied High Speed Steels holds a grant of good wear resistance and toughness. Therefore YG-1 normally delivers taps with bright and unfinished surface. For certain materials, various surface treatments provide higher advantage in machining.

STEAM TEMPERED - Vap

Steam Tempered is a Fe₃O₄-oxyd-coating which reduces friction between the tool and workpiece, also preventing cold welding.

NITRIDING - NI

Recommend surface treatment for machining materials that affect wear abrasion, such as grey cast iron, alu-alloys with high Si-percentages (more than 10%).

Below are the various surface treatments for excellent finish surfaces suitable for many applications. The surface treatments are produced and developed within the company.

TiN-COATING

TiN-coating yields a hardness of approx. 2,300 HV and also a heat resistant up to approx. 600°C. The current coating is an excellent all-round coating for normal applications.

Colour : Golden Coefficient of friction against steel : 0.4

TiCN-COATING

TiCN takes place of TiN when the conditions require the coating to have a different hardness and toughness.

The TiCN brings advantages for machining very difficult steels or cutting interrupted bores.

The TiCN-coating has a hardness of approx. 3,000 HV, but is heat resistance only holds up to approx. 400°C, meaning that the TiCN needs an excellent cooling system for a long service life.

Colour : Blue-Grey Coefficient of friction against steel : 0.4

TiAlN-COATING

A special coating for machining abrasive materials such as grey cast iron, alu-alloys with silicon, fiber reinforced plastics, etc., or machining at high temperatures with insufficient cooling, or at high speeds ≥ 600 m/min. TiAlN has a hardness of approx. 3,000 HV and is heat resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.4

Hardslick-COATING

Hardslick combines the advantages of an extremely hard, thermally stable TiAlN-coating with the sliding and lubricating properties of an outer WC/C(Tungsten carbide/carbon)-coating in a novel way. The Hardslick coating has a hardness of approx. 3,000 HV and is temperature-resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.2

SELECTION GUIDE



HSS-E & HSS-PM COMBO TAPS

For Multi Purpose Tapping
YG-1's Patent

HOLE TYPE		Max. 2.5xD Blind Hole						
TOOL MATERIAL		HSS-E						
CHAMFER LEAD ACC. TO DIN2197		C	C	C	C	C	C	
FLUTE TYPE		Spiral Flute	Spiral Flute	Spiral Flute	Spiral Flute	Spiral Flute	Spiral Flute	
SPIRAL FLUTE ANGLE		R40	R40	R40	R40	R40	R40	
SERIES	M	DIN371/376	TC804 (P.76)	TD804 (P.76)	TB804 (P.76)	TCE05 (P.77)	TDE05 (P.77)	TBE05 (P.77)
		DIN352						
		DIN357/LONG						
	MF	DIN374	TC844 (P.81)	TD844 (P.81)	TB844 (P.81)	TCE09 (P.83)	TDE09 (P.83)	
		DIN2181						
	UNC	DIN371/376	TC824 (P.91)	TD824 (P.91)	TB824 (P.91)	TCE01 (P.92)	TDE01 (P.92)	
		DIN351						
	UNF	DIN371/374	TC864 (P.93)	TD864 (P.93)	TB864 (P.93)	TCE02 (P.94)	TDE02 (P.94)	
		DIN2181						
	BSW	DIN2182/2183						
		DIN351						
	G(BSP)	DIN5156/5157						
	EG-M	DIN371/376						
	EG-UNC	DIN371/376						
EG-UNF	DIN371/374							
SURFACE TREATMENT		Bright	TiN	VAP	Bright	TiN	VAP	
MODEL								



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.114

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC	Bright	TiN	VAP	Bright	TiN	VAP	
P	1	Non-alloy steel	About 0.15% C Annealed		125		○	○	○	○	○	○	
	2		About 0.45% C Annealed		190	13	◎	◎	◎	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered		250	25	◎	◎	◎	◎	◎	◎	
	YG TAP Ti Ni	4	Non-alloy steel	About 0.75% C Annealed		270	28	◎	◎	◎	◎	◎	◎
		5		About 0.75% C Quenched & Tempered		300	32	◎	◎	◎	◎	◎	◎
	YG TAP FORMING	6	Low alloy steel	Annealed		180	10	◎	◎	◎	◎	◎	◎
		7		Quenched & Tempered		275	29	◎	◎	◎	◎	◎	◎
		8		Quenched & Tempered		300	32	◎	◎	◎	◎	◎	◎
		9		Quenched & Tempered		350	38	◎	◎	◎	◎	◎	◎
	NUT TAPS	10	High alloyed steel, and tool steel	Annealed		200	15	○	○	○	○	○	○
		11		Quenched & Tempered		325	35						
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	◎	◎	◎	◎	◎	◎	
	13		Martensitic	Quenched & Tempered	240	23	◎	◎	◎	◎	◎	◎	
	14		Austenitic		180	10	◎	◎	◎	◎	◎	◎	
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎	◎	◎	◎	◎	
	16		Pearlitic (Martensitic)		260	26	◎	◎	◎	◎	◎	◎	
	17	Nodular cast iron	Ferritic		160	3	◎	◎	◎	◎	◎	◎	
	18		Pearlitic		250	25	◎	◎	◎	◎	◎	◎	
	19		Ferritic		130								
20	Malleable cast iron	Pearlitic		230	21								
N	21	Aluminum-wrought alloy	Not Curable		60								
	22		Curable Hardened		100								
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		◎	◎	◎	◎	◎	◎	
	24		≤ 12% Si, Curable Hardened		90								
	25		> 12% Si, Not Curable		130								
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110		◎	◎	◎	◎	◎	◎	
	27		CuZn, CuSnZn (Brass)		90		◎	◎	◎	◎	◎	◎	
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper		100		◎	◎	◎	◎	◎	◎	
	29		Duroplastic, Fiber Reinforced Plastic										
	30	Rubber, Wood, etc.											
S	31	Heat Resistant Super Alloys	Fe Based Annealed		200	15							
	32		Cured		280	30							
	33		Annealed		250	25							
	34		Ni or Co Based Cured		350	38							
	35	Cast		320	34								
	36	Titanium Alloys	Pure Titanium		400 Rm								
	37		Alpha + Beta Alloys Hardened		1050 Rm								
H	38	Hardened steel	Hardened		550	55							
	39		Hardened		630	60							
	40	Hardened Cast Iron	Cast		400	42							
	41		Hardened		550	55							