



**M**

ISO Metric coarse threads DIN 13

- Metrisches ISO-Gewinde DIN 13
- ISO MÉTRIQUE DIN13
- ISO Metrico passo grosso DIN 13





► For stainless steels and correct thread profiles & long tool life due to special tap geometry. YG-1 company has a patent.

► Für rostfreie stähle, genaue Gewindeprofile und lange Standzeit dank einer besonderen Schneidengeometrie. Von YG-1 patentiert.



Hole type

2.5×D

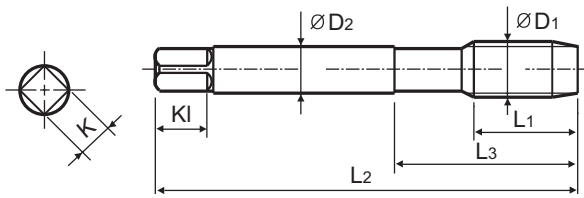

Material groups: **VA** up to M12 over M12

HSS-PM HSS-E DIN 371/376 6H 60° C Vap R45

Machine taps  
Maschinen-  
gewindebohrer

Recommended Cutting Page : P.116

Unit : mm

SIZE	Pitch	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1	P	Vap	L1	L2	L3	ØD2	K	KI	Z	Ød1
M2 × 0.4		TQ744136	8	45	13	2.8	2.1	5	2	1.6
M2.2 × 0.45		TQ744156	8	45	13	2.8	2.1	5	2	1.75
M2.3 × 0.4		TQ744196	8	45	13	2.8	2.1	5	2	1.9
M2.5 × 0.45		TQ744176	9	50	15	2.8	2.1	5	2	2.05
M2.6 × 0.45		TQ744496	9	50	15	2.8	2.1	5	2	2.1
M3 × 0.5		TQ744206	6	56	18	3.5	2.7	6	3	2.5
M3.5 × 0.6		TQ744226	7	56	20	4	3	6	3	2.9
M4 × 0.7		TQ744246	7	63	21	4.5	3.4	6	3	3.3
M4.5 × 0.75		TQ744266	8	70	25	6	4.9	8	3	3.7
M5 × 0.8		TQ744286	8	70	25	6	4.9	8	3	4.2
M6 × 1		TQ744316	10	80	30	6	4.9	8	3	5
M7 × 1		TQ744346	10	80	30	7	5.5	8	3	6
M8 × 1.25		TQ744366	13	90	35	8	6.2	9	3	6.8
M9 × 1.25		TQ744396	13	90	35	9	7	10	3	7.8
M10 × 1.5		TQ744426	15	100	39	10	8	11	3	8.5
M11 × 1.5		TQ744466	17	100	40	8	6.2	9	3	9.5
M12 × 1.75		TQ744506	18	110	44	9	7	10	3	10.2
M14 × 2		TB744546	20	110	44	11	9	12	3	12
M16 × 2		TB744606	20	110	44	12	9	12	3	14
M18 × 2.5		TB744656	25	125	50	14	11	14	4	15.5
M20 × 2.5		TB744706	25	140	54	16	12	15	4	17.5
M22 × 2.5		TB744746	25	140	54	18	14.5	17	4	19.5
M24 × 3		TB744786	30	160	60	18	14.5	17	4	21
M27 × 3		TB744866	30	160	60	20	16	19	4	24
M30 × 3.5		TB744946	35	180	70	22	18	21	4	26.5

- DIN 371(M2~M10) and DIN 376(M11~M30)
- HSS-PM(M2~M12/TQ744) and HSS-E(M14~M30/TB744)
- \* Coating(TiN, TiCN or TiAlN) is available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc																				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended		○		○		○	○					◎	◎							

ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended									○												



COMBO TAPS

RECOMMENDED CUTTING CONDITIONS  
EMPFOHLENE SCHNEIDKONDITIONEN

THREAD MILLS					TB744	TC814	TD814	TB814	TCJ05	TDJ05	TBJ05	TCJ06		
	SYNCHRO TAPS					TB754	TC854	TD854	TB854	TCJ09			TDJ09	
COMBO TAPS					TQ744	TC834	TD834	TB834	TCJ01	TDJ01				
YG TAP GENERAL					TQ754	TC874	TD874	TB874	TCJ02	TDJ02				
YG TAP STEEL	ISO	VDI 3323	Material Description	HB	HRc	Vc (m/min)								
YG TAP HARDENED	P	1	Non-alloy steel	125			15-20	20-25	15-20	15-20	20-25	15-20	15-20	
		2		190	13	15-20	15-20	20-25	15-20	15-20	20-25	15-20	15-20	
		3		250	25		12-18	18-24	12-18	12-18	18-24	12-18	12-18	
		4		270	28	10-15	10-15	15-20	10-15	10-15	15-20	10-15	10-15	
		5		300	32		6-10	10-14	6-10	6-10	10-14	6-10	6-10	
		6	Low alloy steel	180	10	10-15	10-15	15-20	10-15	10-15	15-20	10-15	10-15	
		7		275	29	10-15	10-15	15-20	10-15	10-15	15-20	10-15	10-15	
		8		300	32		6-10	10-14	6-10	6-10	10-14	6-10	6-10	
		9		350	38		3-5	5-7	3-5	3-5	5-7	3-5	3-5	
		10		High alloyed steel, and tool steel	200	15		3-5	5-7	3-5	3-5	5-7	3-5	3-5
		11			325	35								
YG TAP CAST IRON	M	12	Stainless steel	200	15	7-10	7-10	10-15	7-10	7-10	10-15	7-10	7-10	
13		240		23	5-8	5-8	8-11	5-8	5-8	8-11	5-8	5-8		
14		180		10	4-6	4-6	6-8	4-6	4-6	6-8	4-6	4-6		
YG TAP ALU	K	15	Grey cast iron	180	10		10-15	15-20	10-15	10-15	15-20	10-15	10-15	
16		260		26		5-8	8-11	5-8	5-8	8-11	5-8	5-8		
YG TAP Ti Ni		17	Nodular cast iron	160	3		10-15	15-20	10-15	10-15	15-20	10-15	10-15	
18		250		25		5-8	8-11	5-8	5-8	8-11	5-8	5-8		
19		130												
YG TAP FORMING	20	Malleable cast iron	230	21										
NUT TAPS	N	21	Aluminum-wrought alloy	60										
		22		100										
		23	Aluminum-cast, alloyed	75		15-20	20-25	15-20	15-20	20-25	15-20	15-20		
		24		90										
		25		130										
		26	110	Copper and Copper Alloys (Bronze / Brass)			25-35	35-40	25-35	25-35	35-40	25-35	25-35	
		27	90				8-12	12-17	8-12	8-12	12-17	8-12	8-12	
		28	100			15-20	15-20	20-25	15-20	15-20	20-25	15-20	15-20	
		29												
30	Non Metallic Materials													
PIPE TAPS	S	31	Heat Resistant Super Alloys	200	15									
		32		280	30									
		33		250	25									
		34		350	38									
		35		320	34									
		36	Titanium Alloys	400 Rm										
		37		1050 Rm										
TECHNICAL DATA	H	38	Hardened steel	550	55									
		39		630	60									
		40	Chilled Cast Iron	400	42									
		41	Hardened Cast Iron	550	55									

# SURFACE TREATMENT AND COATING

The applied High Speed Steels holds a grant of good wear resistance and toughness. Therefore YG-1 normally delivers taps with bright and unfinished surface. For certain materials, various surface treatments provide higher advantage in machining.

## STEAM TEMPERED - Vap

Steam Tempered is a Fe<sub>3</sub>O<sub>4</sub>-oxyd-coating which reduces friction between the tool and workpiece, also preventing cold welding.

## NITRIDING - NI

Recommend surface treatment for machining materials that affect wear abrasion, such as grey cast iron, alu-alloys with high Si-percentages (more than 10%).

Below are the various surface treatments for excellent finish surfaces suitable for many applications. The surface treatments are produced and developed within the company.

## TiN-COATING

TiN-coating yields a hardness of approx. 2,300 HV and also a heat resistant up to approx. 600°C. The current coating is an excellent all-round coating for normal applications.

Colour : Golden Coefficient of friction against steel : 0.4

## TiCN-COATING

TiCN takes place of TiN when the conditions require the coating to have a different hardness and toughness.

The TiCN brings advantages for machining very difficult steels or cutting interrupted bores.

The TiCN-coating has a hardness of approx. 3,000 HV, but is heat resistance only holds up to approx. 400°C, meaning that the TiCN needs an excellent cooling system for a long service life.

Colour : Blue-Grey Coefficient of friction against steel : 0.4

## TiAlN-COATING

A special coating for machining abrasive materials such as grey cast iron, alu-alloys with silicon, fiber reinforced plastics, etc., or machining at high temperatures with insufficient cooling, or at high speeds  $\geq 600$ m/min. TiAlN has a hardness of approx. 3,000 HV and is heat resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.4

## Hardslick-COATING

Hardslick combines the advantages of an extremely hard, thermally stable TiAlN-coating with the sliding and lubricating properties of an outer WC/C(Tungsten carbide/carbon)-coating in a novel way. The Hardslick coating has a hardness of approx. 3,000 HV and is temperature-resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.2

SELECTION GUIDE



# HSS-E & HSS-PM COMBO TAPS

For Multi Purpose Tapping  
YG-1's Patent

HOLE TYPE		Max. 2.5xD Blind Hole						
TOOL MATERIAL		HSS-E						
CHAMFER LEAD ACC. TO DIN2197		C	C	C	C	C	C	
FLUTE TYPE		Spiral Flute	Spiral Flute	Spiral Flute	Spiral Flute	Spiral Flute	Spiral Flute	
SPIRAL FLUTE ANGLE		R40	R40	R40	R40	R40	R40	
SERIES	M	DIN371/376	TC804 (P.76)	TD804 (P.76)	TB804 (P.76)	TCE05 (P.77)	TDE05 (P.77)	TBE05 (P.77)
		DIN352						
		DIN357/LONG						
	MF	DIN374	TC844 (P.81)	TD844 (P.81)	TB844 (P.81)	TCE09 (P.83)	TDE09 (P.83)	
		DIN2181						
	UNC	DIN371/376	TC824 (P.91)	TD824 (P.91)	TB824 (P.91)	TCE01 (P.92)	TDE01 (P.92)	
		DIN351						
	UNF	DIN371/374	TC864 (P.93)	TD864 (P.93)	TB864 (P.93)	TCE02 (P.94)	TDE02 (P.94)	
		DIN2181						
	BSW	DIN2182/2183						
		DIN351						
	G(BSP)	DIN5156/5157						
	EG-M	DIN371/376						
	EG-UNC	DIN371/376						
EG-UNF	DIN371/374							
SURFACE TREATMENT		Bright	TiN	VAP	Bright	TiN	VAP	
MODEL								



Please visit  
[globalyg1.com/mat](http://globalyg1.com/mat)  
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.114

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC	Bright	TiN	VAP	Bright	TiN	VAP	
P	1	Non-alloy steel	About 0.15% C Annealed		125		○	○	○	○	○	○	
	2		About 0.45% C Annealed		190	13	◎	◎	◎	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered		250	25	◎	◎	◎	◎	◎	◎	
	YG TAP Ti Ni	4	Non-alloy steel	About 0.75% C Annealed		270	28	◎	◎	◎	◎	◎	◎
		5		About 0.75% C Quenched & Tempered		300	32	◎	◎	◎	◎	◎	◎
	YG TAP FORMING	6	Low alloy steel	Annealed		180	10	◎	◎	◎	◎	◎	◎
		7		Quenched & Tempered		275	29	◎	◎	◎	◎	◎	◎
		8		Quenched & Tempered		300	32	◎	◎	◎	◎	◎	◎
		9		Quenched & Tempered		350	38	◎	◎	◎	◎	◎	◎
	NUT TAPS	10	High alloyed steel, and tool steel	Annealed		200	15	○	○	○	○	○	○
		11		Quenched & Tempered		325	35						
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	◎	◎	◎	◎	◎	◎	
	13		Martensitic	Quenched & Tempered	240	23	◎	◎	◎	◎	◎	◎	
	14		Austenitic		180	10	◎	◎	◎	◎	◎	◎	
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎	◎	◎	◎	◎	
	16		Pearlitic (Martensitic)		260	26	◎	◎	◎	◎	◎	◎	
	17	Nodular cast iron	Ferritic		160	3	◎	◎	◎	◎	◎	◎	
	18		Pearlitic		250	25	◎	◎	◎	◎	◎	◎	
	19		Ferritic		130								
20	Malleable cast iron	Pearlitic		230	21								
N	21	Aluminum-wrought alloy	Not Curable		60								
	22		Curable Hardened		100								
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		◎	◎	◎	◎	◎	◎	
	24		≤ 12% Si, Curable Hardened		90								
	25		> 12% Si, Not Curable		130								
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110		◎	◎	◎	◎	◎	◎	
	27		CuZn, CuSnZn (Brass)		90		◎	◎	◎	◎	◎	◎	
	28	Non Metallic Materials	CuSn, lead-free copper and electrolytic copper		100		◎	◎	◎	◎	◎	◎	
	29		Duroplastic, Fiber Reinforced Plastic										
	30	Rubber, Wood, etc.											
S	31	Heat Resistant Super Alloys	Fe Based Annealed		200	15							
	32		Cured		280	30							
	33		Annealed		250	25							
	34		Ni or Co Based Cured		350	38							
	35		Cast		320	34							
	36	Titanium Alloys	Pure Titanium		400 Rm								
	37		Alpha + Beta Alloys Hardened		1050 Rm								
H	38	Hardened steel	Hardened		550	55							
	39		Hardened		630	60							
	40	Hardened Cast Iron	Cast		400	42							
	41		Hardened		550	55							

