

**CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES**

LONG

● VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL

LANG

● Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série longue


LONGUE

● PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (CON FORI DI REFRIGERAZIONE)

LUNGA

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes

- ▶ Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- ▶ Breitere und tiefere Spannuten für maximale Spanabfuhr
- ▶ Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen



DIN 6537
CARBIDE
30°
h6
m7
118°
20 bar
P.141

5 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
D5433030	3.0	6	28	66
D5433031	3.1	6	28	66
D5433032	3.2	6	28	66
D5433033	3.3	6	28	66
D5433034	3.4	6	28	66
D5433035	3.5	6	28	66
D5433036	3.6	6	28	66
D5433037	3.7	6	28	66
D5433038	3.8	6	36	74
D5433039	3.9	6	36	74
D5433040	4.0	6	36	74
D5433041	4.1	6	36	74
D5433042	4.2	6	36	74
D5433043	4.3	6	36	74
D5433044	4.4	6	36	74
D5433045	4.5	6	36	74
D5433046	4.6	6	36	74
D5433047	4.7	6	36	74
D5433048	4.8	6	44	82
D5433049	4.9	6	44	82
D5433050	5.0	6	44	82
D5433051	5.1	6	44	82

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
D5433052	5.2	6	44	82
D5433053	5.3	6	44	82
D5433054	5.4	6	44	82
D5433055	5.5	6	44	82
D5433056	5.6	6	44	82
D5433057	5.7	6	44	82
D5433058	5.8	6	44	82
D5433059	5.9	6	44	82
D5433060	6.0	6	44	82
D5433061	6.1	8	53	91
D5433062	6.2	8	53	91
D5433063	6.3	8	53	91
D5433064	6.4	8	53	91
D5433065	6.5	8	53	91
D5433066	6.6	8	53	91
D5433067	6.7	8	53	91
D5433068	6.8	8	53	91
D5433069	6.9	8	53	91
D5433070	7.0	8	53	91
D5433071	7.1	8	53	91
D5433072	7.2	8	53	91
D5433073	7.3	8	53	91

Unit : mm

- ▶ DLC coating is available on your request.
- ▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended																					
ISO	N								S							H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials	Heat Resistant Super Alloys				Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎																	

**CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES** **LONG**

- VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL **LANG**
- Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série longue **LONGUE**
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (CON FORI DI REFRIGERAZIONE) **LUNGA**

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes

- ▶ Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- ▶ Breitere und tiefere Spannuten für maximale Spanabfuhr
- ▶ Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen



DIN 6537
CARBIDE
30°
h6
m7
118°
20 bar
P.141

**5 × D**

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
D5433074	7.4	8	53	91
D5433075	7.5	8	53	91
D5433076	7.6	8	53	91
D5433077	7.7	8	53	91
D5433078	7.8	8	53	91
D5433079	7.9	8	53	91
D5433080	8.0	8	53	91
D5433081	8.1	10	61	103
D5433082	8.2	10	61	103
D5433083	8.3	10	61	103
D5433084	8.4	10	61	103
D5433085	8.5	10	61	103
D5433086	8.6	10	61	103
D5433087	8.7	10	61	103
D5433088	8.8	10	61	103
D5433089	8.9	10	61	103
D5433090	9.0	10	61	103
D5433091	9.1	10	61	103
D5433092	9.2	10	61	103
D5433093	9.3	10	61	103
D5433094	9.4	10	61	103
D5433095	9.5	10	61	103

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
D5433096	9.6	10	61	103
D5433097	9.7	10	61	103
D5433098	9.8	10	61	103
D5433099	9.9	10	61	103
D5433100	10.0	10	61	103
D5433101	10.1	12	71	118
D5433102	10.2	12	71	118
D5433103	10.3	12	71	118
D5433104	10.4	12	71	118
D5433105	10.5	12	71	118
D5433106	10.6	12	71	118
D5433107	10.7	12	71	118
D5433108	10.8	12	71	118
D5433109	10.9	12	71	118
D5433110	11.0	12	71	118
D5433111	11.1	12	71	118
D5433112	11.2	12	71	118
D5433113	11.3	12	71	118
D5433114	11.4	12	71	118
D5433115	11.5	12	71	118
D5433116	11.6	12	71	118
D5433117	11.7	12	71	118

- ▶ DLC coating is available on your request.
- ▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended																					
ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	◎	◎																	



**CARBIDE, DREAM DRILLS - ALU with COOLANT HOLES**

LONG

● VOLLHARTMETALL DREAM SPIRALBOHRER - ALU mit KÜHLKANAL

LANG

● Forets DREAM DRILLS carbure pour ALU, avec arrosage central, série longue


LONGUE

● PUNTE ELICOIDALI IN MD, DREAM DRILLS - ALU (CON FORI DI REFRIGERAZIONE)

LUNGA

- ▶ Optimized thinning for Aluminum & Aluminum Alloys to prevent any clogging from chip welding
- ▶ Wider and deeper flute gullets for maximum chip removal
- ▶ Special geometry and smooth coating reduces built up edge and improves finishes

- ▶ Optimierte Ausspitzung für Aluminum & Aluminiumlegierungen zur Vermeidung von Verstopfungen durch das Aufschweißen der Späne
- ▶ Breitere und tiefere Spannuten für maximale Spanabfuhr
- ▶ Spezielle Geometrie und glatte Beschichtung reduzieren Aufbauschneidenbildung und verbessern die Oberflächen

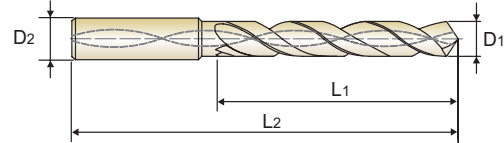

P.141

5 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
D5433118	11.8	12	71	118
D5433119	11.9	12	71	118
D5433120	12.0	12	71	118
D5433125	12.5	14	77	124
D5433130	13.0	14	77	124
D5433135	13.5	14	77	124
D5433140	14.0	14	77	124
D5433145	14.5	16	83	133
D5433150	15.0	16	83	133
D5433155	15.5	16	83	133

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
D5433160	16.0	16	83	133
D5433165	16.5	18	93	143
D5433170	17.0	18	93	143
D5433175	17.5	18	93	143
D5433180	18.0	18	93	143
D5433185	18.5	20	101	153
D5433190	19.0	20	101	153
D5433195	19.5	20	101	153
D5433200	20.0	20	101	153

- ▶ DLC coating is available on your request.
- ▶ Other shank types are available on your request.

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended																					
ISO	N									S							H				
	Aluminum-wrought alloy			Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	⊙	⊙	⊙	⊙																	

⊙ : Excellent ○ : Good



**RECOMMENDED CUTTING CONDITIONS**  
**EMPHOHLENE SCHNEIDPARAMETER**

**D5432, D5433, D5434** SERIES

with **COOLANT HOLES**

RPM = rev./min.  
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)													
					3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0			
<b>P</b>	1	Non-alloy steel																
	2																	
	3																	
	4																	
	5																	
	6	Low alloy steel																
	7																	
	8																	
	9																	
	10		High alloyed steel, and tool steel															
	11																	
<b>M</b>	12	Stainless steel																
	13																	
	14																	
<b>K</b>	15	Grey cast iron																
	16																	
	17	Nodular cast iron																
	18																	
	19		Malleable cast iron															
20																		
<b>N</b>	21	Aluminum-wrought alloy	200	RPM	21220	15920	12730	10610	7960	6370	5310	4550	3980	3540	3180			
			FEED	0.12-0.18	0.14-0.22	0.15-0.23	0.17-0.25	0.21-0.28	0.24-0.30	0.24-0.30	0.25-0.35	0.25-0.35	0.28-0.38	0.30-0.40				
	22		160	RPM	16980	12730	10190	8490	6370	5090	4240	3640	3180	2830	2550			
			FEED	0.12-0.18	0.14-0.22	0.15-0.23	0.17-0.25	0.21-0.28	0.24-0.30	0.24-0.30	0.25-0.35	0.25-0.35	0.28-0.38	0.30-0.40				
	23	Aluminum-cast, alloyed	150	RPM	15920	11940	9550	7960	5970	4770	3980	3410	2980	2650	2390			
			FEED	0.15-0.21	0.17-0.25	0.19-0.27	0.21-0.28	0.24-0.31	0.29-0.45	0.33-0.55	0.35-0.60	0.35-0.60	0.39-0.73	0.39-0.85				
	24			140	RPM	14850	11140	8910	7430	5570	4460	3710	3180	2790	2480	2230		
				FEED	0.15-0.21	0.17-0.25	0.19-0.27	0.21-0.28	0.24-0.31	0.29-0.45	0.33-0.55	0.35-0.60	0.35-0.60	0.39-0.73	0.39-0.85			
	25																	
	26	Copper and Copper Alloys (Bronze / Brass)																
27																		
28																		
29	Non Metallic Materials																	
30																		
<b>S</b>	31	Heat Resistant Super Alloys																
	32																	
	33																	
	34																	
	35																	
	36	Titanium Alloys																
	37																	
<b>H</b>	38	Hardened steel																
	39																	
	40	Chilled Cast Iron																
	41	Hardened Cast Iron																

SELECTION GUIDE



SERIES


	D5432	D5433	D5434
DRILLING DEPTH	3XD	5XD	8XD
LENGTH	SHORT	LONG	EXTRA LONG
SIZE MIN	D3.0	D3.0	D3.0
SIZE MAX	D20.0	D20.0	D14.0
PAGE	133	136	139

SURFACE TREATMENT

Bright

# SOLID CARBIDE DREAM DRILLS ALU

For Aluminum and Aluminum Alloys

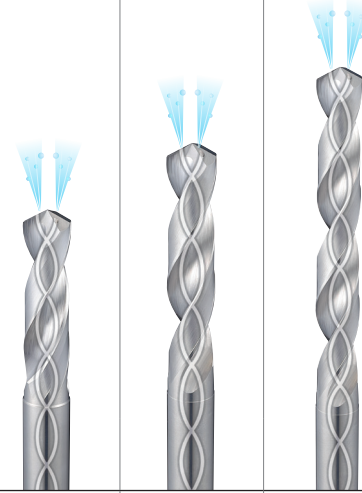

Please visit [globalyg1.com/mat](http://globalyg1.com/mat) for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.141

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125				
	2		About 0.45% C Annealed	190	13			
	3		About 0.45% C Quenched & Tempered	250	25			
	4		About 0.75% C Annealed	270	28			
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10			
	7		Quenched & Tempered	275	29			
	8		Quenched & Tempered	300	32			
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11	Quenched & Tempered		325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15			
	13		Martensitic Quenched & Tempered	240	23			
	14		Austenitic	180	10			
K	15	Grey cast iron	Pearlitic / ferritic	180	10			
	16		Pearlitic (Martensitic)	260	26			
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19		Ferritic	130				
20	Malleable cast iron	Pearlitic	230	21				
N	21	Aluminum-wrought alloy	Not Curable	60		◎	◎	◎
	22		Curable Hardened	100		◎	◎	◎
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		◎	◎	◎
	24		≤ 12% Si, Curable Hardened	90		◎	◎	◎
	25		> 12% Si, Not Curable	130				
	26		Copper and Copper Alloys	Cutting Alloys, PB>1%	110			
	27	(Bronze / Brass)	CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Ni or Co Based Cured	350	38			
	35	Cast	320	34				
	36	Titanium Alloys	Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			