

YG DREAM DRILLS - FLAT BOTTOM


DH450 SERIES

CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES LONG

- VHM, DREAM DRILLS - FLACHBOHRER
 - DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC
 - PUNTE IN MD DREAM DRILLS, TESTA PIANA
- KURZ
 - LONGUE
 - LUNGA

- ▶ For holes on various angled surfaces.
- ▶ 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- ▶ Optimized flute shape for excellent chip evacuation.
- ▶ High strength cutting edge to improve tool life and versatility drilling.
- ▶ For through holes, minimized burrs at entrance and exit when drilling thin plate.
- ▶ CARBIDE, DREAM DRILLS - FLAT BOTTOM with Coolant Holes
- ▶ Pilot Drilling for 5XD

- ▶ Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- ▶ Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- ▶ Optimierte Nutenform für hervorragende Spanabfuhr.
- ▶ Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- ▶ Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- ▶ VOLLHARTMETALL, DREAM DRILLS - 180°-Spitzenwinkel mit Kühlkanalbohrungen
- ▶ Pilotbohren 5XD

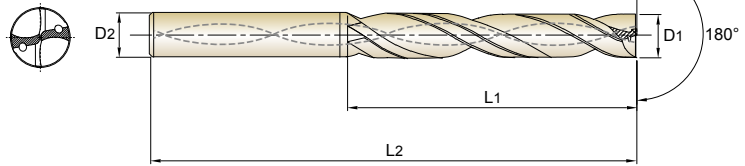

CARBIDE

30°

h6

h7

180°

20 bar

P.117

5 × D

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
TiAlN				
DH450030	3.0	6	28	66
DH450031	3.1	6	28	66
DH450032	3.2	6	28	66
DH450033	3.3	6	28	66
DH450034	3.4	6	28	66
DH450035	3.5	6	28	66
DH450036	3.6	6	28	66
DH450037	3.7	6	28	66
DH450038	3.8	6	36	74
DH450039	3.9	6	36	74
DH450040	4.0	6	36	74
DH450041	4.1	6	36	74
DH450042	4.2	6	36	74
DH450043	4.3	6	36	74
DH450044	4.4	6	36	74
DH450045	4.5	6	36	74
DH450046	4.6	6	36	74
DH450047	4.7	6	36	74
DH450048	4.8	6	44	82
DH450049	4.9	6	44	82
DH450050	5.0	6	44	82
DH450051	5.1	6	44	82

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
TiAlN				
DH450052	5.2	6	44	82
DH450053	5.3	6	44	82
DH450054	5.4	6	44	82
DH450055	5.5	6	44	82
DH450056	5.6	6	44	82
DH450057	5.7	6	44	82
DH450058	5.8	6	44	82
DH450059	5.9	6	44	82
DH450060	6.0	6	44	82
DH450061	6.1	8	53	91
DH450062	6.2	8	53	91
DH450063	6.3	8	53	91
DH450064	6.4	8	53	91
DH450065	6.5	8	53	91
DH450066	6.6	8	53	91
DH450067	6.7	8	53	91
DH450068	6.8	8	53	91
DH450069	6.9	8	53	91
DH450070	7.0	8	53	91
DH450071	7.1	8	53	91
DH450072	7.2	8	53	91
DH450073	7.3	8	53	91

Unit : mm

▶ Other diameters and shank types are available upon request.

▶ NEXT PAGE

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	○	○	○			○			◎	○				

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

◎ : Excellent ○ : Good



DREAM DRILLS - FLAT BOTTOM

DH450 SERIES

CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES LONG


🇩🇪 VHM, DREAM DRILLS - FLACHBOHRER KURZ

🇫🇷 DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC LONGUE

🇮🇹 PUNTE IN MD DREAM DRILLS, TESTA PIANA LUNGA

- ▶ For holes on various angled surfaces.
- ▶ 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- ▶ Optimized flute shape for excellent chip evacuation.
- ▶ High strength cutting edge to improve tool life and versatility drilling.
- ▶ For through holes, minimized burrs at entrance and exit when drilling thin plate.
- ▶ CARBIDE, DREAM DRILLS - FLAT BOTTOM with Coolant Holes
- ▶ Pilot Drilling for 5XD

- ▶ Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- ▶ Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- ▶ Optimierte Nutenform für hervorragende Spanabfuhr.
- ▶ Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- ▶ Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- ▶ VOLLHARTMETALL, DREAM DRILLS - 180°-Spitzenwinkel mit Kühlkanalbohrungen
- ▶ Pilotbohren 5XD

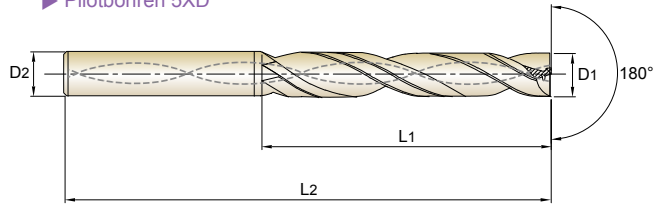

P.117

5 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH450074	7.4	8	53	91
DH450075	7.5	8	53	91
DH450076	7.6	8	53	91
DH450077	7.7	8	53	91
DH450078	7.8	8	53	91
DH450079	7.9	8	53	91
DH450080	8.0	8	53	91
DH450081	8.1	10	61	103
DH450082	8.2	10	61	103
DH450083	8.3	10	61	103
DH450084	8.4	10	61	103
DH450085	8.5	10	61	103
DH450086	8.6	10	61	103
DH450087	8.7	10	61	103
DH450088	8.8	10	61	103
DH450089	8.9	10	61	103
DH450090	9.0	10	61	103
DH450091	9.1	10	61	103
DH450092	9.2	10	61	103
DH450093	9.3	10	61	103
DH450094	9.4	10	61	103
DH450095	9.5	10	61	103

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAIN	D1	D2	L1	L2
DH450096	9.6	10	61	103
DH450097	9.7	10	61	103
DH450098	9.8	10	61	103
DH450099	9.9	10	61	103
DH450100	10.0	10	61	103
DH450102	10.2	12	71	118
DH450105	10.5	12	71	118
DH450108	10.8	12	71	118
DH450110	11.0	12	71	118
DH450115	11.5	12	71	118
DH450118	11.8	12	71	118
DH450119	11.9	12	71	118
DH450120	12.0	12	71	118
DH450125	12.5	14	77	124
DH450130	13.0	14	77	124
DH450135	13.5	14	77	124
DH450140	14.0	14	77	124
DH450145	14.5	16	83	133
DH450150	15.0	16	83	133
DH450155	15.5	16	83	133
DH450160	16.0	16	83	133
DH450165	16.5	18	93	143

▶ Other diameters and shank types are available upon request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	○	○	○		○				◎	○				

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

YG DREAM DRILLS - FLAT BOTTOM


DH450 SERIES

CARBIDE, DREAM DRILLS - FLAT BOTTOM with COOLANT HOLES LONG

- VHM, DREAM DRILLS - FLACHBOHRER KURZ
- DREAM DRILLS - FOND PLAT, FORET CARBURE MONOBLOC LONGUE
- PUNTE IN MD DREAM DRILLS, TESTA PIANA LUNGA

- ▶ For holes on various angled surfaces.
- ▶ 180 degree point angle enables drilling of flat, inclined and curved surfaces.
- ▶ Optimized flute shape for excellent chip evacuation.
- ▶ High strength cutting edge to improve tool life and versatility drilling.
- ▶ For through holes, minimized burrs at entrance and exit when drilling thin plate.
- ▶ CARBIDE, DREAM DRILLS - FLAT BOTTOM with Coolant Holes
- ▶ Pilot Drilling for 5XD

- ▶ Für Bohrungen auf verschiedenen abgewinkelten Flächen.
- ▶ Der 180-Grad-Spitzenwinkel ermöglicht das Bohren von flachen, geneigten und gekrümmten Oberflächen.
- ▶ Optimierte Nutenform für hervorragende Spanabfuhr.
- ▶ Hochfeste Schneide zur Verbesserung der Standzeit und Vielseitigkeit beim Bohren.
- ▶ Für Durchgangsbohrungen, minimierter Grat am Ein- und Austritt beim Bohren von dünnen Blechen.
- ▶ VOLLHARTMETALL, DREAM DRILLS - 180°-Spitzenwinkel mit Kühlkanalbohrungen
- ▶ Pilotbohren 5XD

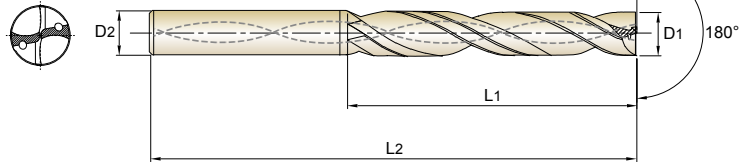

CARBIDE
20°
h6
h7
180°
P.117


5 × D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450170	17.0	18	93	143
DH450175	17.5	18	93	143
DH450180	18.0	18	93	143
DH450185	18.5	20	101	153

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH450190	19.0	20	101	153
DH450195	19.5	20	101	153
DH450200	20.0	20	101	153

▶ Other diameters and shank types are available upon request.

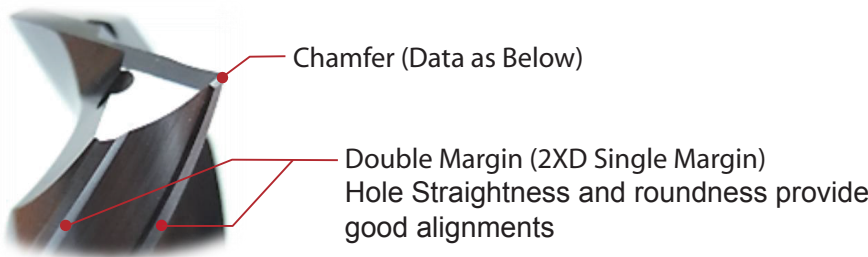

Drill Diameter (mm)	Corner Chamfer (mm)
Ø3.0 ~ Ø6.0	0.06
Ø6.1 ~ Ø10.0	0.12
Ø10.1 ~ Ø14.0	0.18
Ø14.1 ~ Ø20.0	0.26

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	○	◎	○	○	○		○				◎	○					
ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○																			

YG-1 DREAM DRILLS - FLAT BOTTOM


RECOMMENDED CUTTING CONDITIONS EMPFOLHENE SCHNEIDPARAMETER

DH450 SERIES

with COOLANT HOLES (5XD)

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)									
					3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0	
P	1	Non-alloy steel	100	RPM	10610	7960	6370	5310	3980	3180	2650	1990	1590	
				FEED	0.05-0.09	0.08-0.12	0.09-0.15	0.12-0.18	0.18-0.24	0.24-0.30	0.26-0.36	0.38-0.48	0.50-0.60	
			2	RPM	9550	7160	5730	4770	3580	2860	2390	1790	1430	
				FEED	0.02-0.05	0.04-0.08	0.04-0.10	0.06-0.12	0.10-0.16	0.14-0.20	0.14-0.24	0.22-0.32	0.30-0.40	
			3	RPM	9550	7160	5730	4770	3580	2860	2390	1790	1430	
	FEED			0.02-0.05	0.04-0.08	0.04-0.10	0.06-0.12	0.10-0.16	0.14-0.20	0.14-0.24	0.22-0.32	0.30-0.40		
	4		RPM	7960	5970	4770	3980	2980	2390	1990	1490	1190		
			FEED	0.02-0.04	0.03-0.06	0.05-0.08	0.05-0.09	0.06-0.12	0.09-0.15	0.08-0.18	0.14-0.24	0.20-0.30		
	5		RPM	7960	5970	4770	3980	2980	2390	1990	1490	1190		
			FEED	0.02-0.04	0.03-0.06	0.05-0.08	0.05-0.09	0.06-0.12	0.09-0.15	0.08-0.18	0.14-0.24	0.20-0.30		
	6		Low alloy steel	85	RPM	9020	6760	5410	4510	3380	2710	2250	1690	1350
FEED		0.02-0.05			0.04-0.08	0.04-0.10	0.06-0.12	0.10-0.16	0.14-0.20	0.14-0.24	0.22-0.32	0.30-0.40		
7		RPM		7960	5970	4770	3980	2980	2390	1990	1490	1190		
		FEED		0.02-0.05	0.04-0.08	0.04-0.10	0.06-0.12	0.10-0.16	0.14-0.20	0.14-0.24	0.22-0.32	0.30-0.40		
8		RPM		7960	5970	4770	3980	2980	2390	1990	1490	1190		
	FEED	0.02-0.04	0.03-0.06	0.05-0.08	0.05-0.09	0.06-0.12	0.09-0.15	0.08-0.18	0.14-0.24	0.20-0.30				
9	High alloyed steel, and tool steel	RPM	5310	3980	3180	2650	1990	1590	1330	990	800			
		FEED	0.02-0.04	0.03-0.06	0.05-0.08	0.05-0.09	0.06-0.12	0.09-0.15	0.08-0.18	0.14-0.24	0.20-0.30			
M	Stainless steel	60	RPM	6370	4770	3820	3180	2390	1910	1590	1190	950		
			FEED	0.02-0.05	0.04-0.08	0.04-0.10	0.06-0.12	0.10-0.16	0.14-0.20	0.14-0.24	0.22-0.32	0.30-0.40		
K	Grey cast iron	90	RPM	9550	7160	5730	4770	3580	2860	2390	1790	1430		
			FEED	0.02-0.05	0.03-0.06	0.05-0.08	0.05-0.09	0.06-0.12	0.09-0.15	0.08-0.18	0.14-0.24	0.20-0.30		
	16	RPM	7960	5970	4770	3980	2980	2390	1990	1490	1190			
		FEED	0.02-0.05	0.02-0.05	0.03-0.06	0.03-0.07	0.04-0.10	0.07-0.13	0.06-0.16	0.11-0.21	0.15-0.25			
	17	Nodular cast iron												
19	Malleable cast iron													
N	21	Aluminum-wrought alloy	160	RPM	16980	12730	10190	8490	6370	5090	4240	3180	2550	
				FEED	0.05-0.09	0.08-0.12	0.09-0.15	0.12-0.18	0.18-0.24	0.24-0.30	0.26-0.36	0.38-0.48	0.50-0.60	
	22		RPM	16980	12730	10190	8490	6370	5090	4240	3180	2550		
			FEED	0.05-0.09	0.08-0.12	0.09-0.15	0.12-0.18	0.18-0.24	0.24-0.30	0.26-0.36	0.38-0.48	0.50-0.60		
	23		Aluminum-cast, alloyed											
S	Heat Resistant Super Alloys													
H	Titanium Alloys													
H	Hardened steel													
H	Chilled Cast Iron													
H	Hardened Cast Iron													

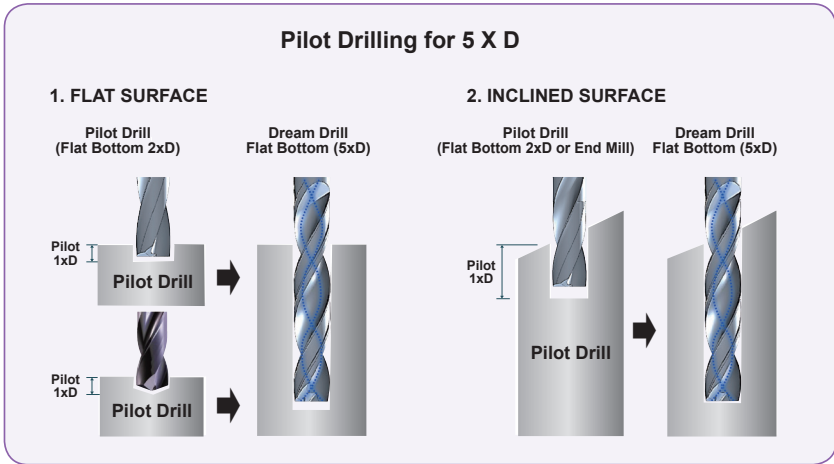

- ▶ For Flat bottom 5xD drilling depth, Slope surface needs Pilot Drilling with YG-1 Flat Bottom Drill (2XD) and Flat surface needs Pilot Drilling with YG-1 Dream Drill General.
- ▶ Pilot Drilling Depth : around 1XD
- ▶ Pilot Drilling Diameter : same size diameter

SELECTION GUIDE



SERIES

DPP447

DH450

DRILLING DEPTH

2XD

5XD

LENGTH

SHORT

LONG

SIZE MIN

D3.0

D3.0

SIZE MAX

D20.0

D20.0

PAGE

110

113

SURFACE TREATMENT

X-Coating

TiAlN

SOLID CARBIDE DREAM DRILLS FLAT BOTTOM

For Holes on Various Angled Surfaces



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.116

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	DPP447	DH450	
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	
	4		About 0.75% C Annealed	270	28	○	○	
	5	Low alloy steel	About 0.75% C Quenched & Tempered	300	32	○	○	
	6		Annealed	180	10	◎	◎	
	7		Quenched & Tempered	275	29	○	○	
	8		Quenched & Tempered	300	32	○	○	
	9		Quenched & Tempered	350	38	○	○	
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11			Quenched & Tempered	325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	
	13		Martensitic Quenched & Tempered	240	23			
	14		Austenitic	180	10			
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	
	16		Pearlitic (Martensitic)	260	26	○	○	
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19	Malleable cast iron	Ferritic	130				
	20		Pearlitic	230	21			
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	
	22		Curable Hardened	100		○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75				
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26		Copper and Copper Alloys	Cutting Alloys, PB>1%	110			
	27	(Bronze / Brass)	CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Ni or Co Based Cured	350	38			
	35	Cast	320	34				
	36	Titanium Alloys	Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
COUNTER SINKS	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			