

TiAIN-COATED SOLID CARBIDE DREAM DRILLS General with Coolant Holes (3XD)

PLAIN SHANK

DH406 SERIES

FLAT SHANK

DH446 SERIES

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



SHORT

3 × D

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406030	DH446030	3.0	6	20	62
DH406031	DH446031	3.1	6	20	62
DH406032	DH446032	3.2	6	20	62
DH406033	DH446033	3.3	6	20	62
DH406034	DH446034	3.4	6	20	62
DH406035	DH446035	3.5	6	20	62
DH406036	DH446036	3.6	6	20	62
DH406037	DH446037	3.7	6	20	62
DH406038	DH446038	3.8	6	24	66
DH406039	DH446039	3.9	6	24	66
DH406040	DH446040	4.0	6	24	66
DH406041	DH446041	4.1	6	24	66
DH406042	DH446042	4.2	6	24	66
DH406043	DH446043	4.3	6	24	66
DH406044	DH446044	4.4	6	24	66
DH406045	DH446045	4.5	6	24	66
DH406046	DH446046	4.6	6	24	66
DH406047	DH446047	4.7	6	24	66
DH406048	DH446048	4.8	6	28	66
DH406049	DH446049	4.9	6	28	66
DH406050	DH446050	5.0	6	28	66
DH406051	DH446051	5.1	6	28	66
DH406052	DH446052	5.2	6	28	66
DH406053	DH446053	5.3	6	28	66
DH406054	DH446054	5.4	6	28	66
DH406055	DH446055	5.5	6	28	66

Unit : mm

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406056	DH446056	5.6	6	28	66
DH406057	DH446057	5.7	6	28	66
DH406058	DH446058	5.8	6	28	66
DH406059	DH446059	5.9	6	28	66
DH406060	DH446060	6.0	6	28	66
DH406061	DH446061	6.1	8	34	79
DH406062	DH446062	6.2	8	34	79
DH406063	DH446063	6.3	8	34	79
DH406064	DH446064	6.4	8	34	79
DH406065	DH446065	6.5	8	34	79
DH406066	DH446066	6.6	8	34	79
DH406067	DH446067	6.7	8	34	79
DH406068	DH446068	6.8	8	34	79
DH406069	DH446069	6.9	8	34	79
DH406070	DH446070	7.0	8	34	79
DH406071	DH446071	7.1	8	41	79
DH406072	DH446072	7.2	8	41	79
DH406073	DH446073	7.3	8	41	79
DH406074	DH446074	7.4	8	41	79
DH406075	DH446075	7.5	8	41	79
DH406076	DH446076	7.6	8	41	79
DH406077	DH446077	7.7	8	41	79
DH406078	DH446078	7.8	8	41	79
DH406079	DH446079	7.9	8	41	79
DH406080	DH446080	8.0	8	41	79
DH406081	DH446081	8.1	10	47	89

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○	
ISO	N								S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

TiAIN-COATED SOLID CARBIDE DREAM DRILLS
General with Coolant Holes (3XD)


PLAIN SHANK

DH406 SERIES

FLAT SHANK

DH446 SERIES

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

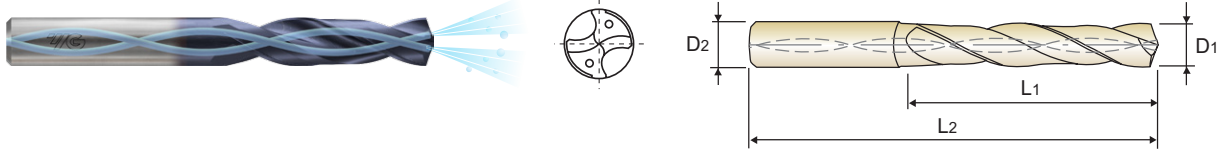

DIN 6537
CARBIDE
h6
h6
m7
140°
20 bar
P. 40

SHORT

3 × D

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406082	DH446082	8.2	10	47	89
DH406083	DH446083	8.3	10	47	89
DH406084	DH446084	8.4	10	47	89
DH406085	DH446085	8.5	10	47	89
DH406086	DH446086	8.6	10	47	89
DH406087	DH446087	8.7	10	47	89
DH406088	DH446088	8.8	10	47	89
DH406089	DH446089	8.9	10	47	89
DH406090	DH446090	9.0	10	47	89
DH406091	DH446091	9.1	10	47	89
DH406092	DH446092	9.2	10	47	89
DH406093	DH446093	9.3	10	47	89
DH406094	DH446094	9.4	10	47	89
DH406095	DH446095	9.5	10	47	89
DH406096	DH446096	9.6	10	47	89
DH406097	DH446097	9.7	10	47	89
DH406098	DH446098	9.8	10	47	89
DH406099	DH446099	9.9	10	47	89
DH406100	DH446100	10.0	10	47	89
DH406101	DH446101	10.1	12	55	102
DH406102	DH446102	10.2	12	55	102
DH406103	DH446103	10.3	12	55	102
DH406104	DH446104	10.4	12	55	102
DH406105	DH446105	10.5	12	55	102
DH406106	DH446106	10.6	12	55	102
DH406107	DH446107	10.7	12	55	102
DH406108	DH446108	10.8	12	55	102
DH406109	DH446109	10.9	12	55	102

Unit : mm

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406110	DH446110	11.0	12	55	102
DH406111	DH446111	11.1	12	55	102
DH406112	DH446112	11.2	12	55	102
DH406113	DH446113	11.3	12	55	102
DH406114	DH446114	11.4	12	55	102
DH406115	DH446115	11.5	12	55	102
DH406116	DH446116	11.6	12	55	102
DH406117	DH446117	11.7	12	55	102
DH406118	DH446118	11.8	12	55	102
DH406119	DH446119	11.9	12	55	102
DH406120	DH446120	12.0	12	55	102
DH406125	DH446125	12.5	14	60	107
DH406130	DH446130	13.0	14	60	107
DH406135	DH446135	13.5	14	60	107
DH406140	DH446140	14.0	14	60	107
DH406145	DH446145	14.5	16	65	115
DH406150	DH446150	15.0	16	65	115
DH406155	DH446155	15.5	16	65	115
DH406160	DH446160	16.0	16	65	115
DH406165	DH446165	16.5	18	73	123
DH406170	DH446170	17.0	18	73	123
DH406175	DH446175	17.5	18	73	123
DH406180	DH446180	18.0	18	73	123
DH406185	DH446185	18.5	20	79	131
DH406190	DH446190	19.0	20	79	131
DH406195	DH446195	19.5	20	79	131
DH406200	DH446200	20.0	20	79	131

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	260	160	250	130	230		
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	◎	○		

ISO	N										S						H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended																							

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES
 DRILLING DEPTH / STANDARD
 LENGTH
 SIZE MIN
 SIZE MAX
 PAGE


PRO ^{NEW}				GENERAL					
DGN523	DGN526	DGN506	DGN508	DH404	DH423 DH443	DH424 DH444	DH406 DH446	DH408 DH448	DH421
3XD	5XD	3XD	5XD	3XD	3XD	5XD	3XD	5XD	8XD
SHORT	LONG	SHORT	LONG	STUB	SHORT	LONG	SHORT	LONG	EXTRALONG
D3.0	D1.0	D3.0	D1.0	D3.0	D32.0	D1.0	D3.0	D1.0	D3.0
D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D14.0
8	11	14	16	24	26	29	32	34	37

SURFACE TREATMENT

Z-Coating

TiAIN

SOLID CARBIDE **DREAM DRILLS**

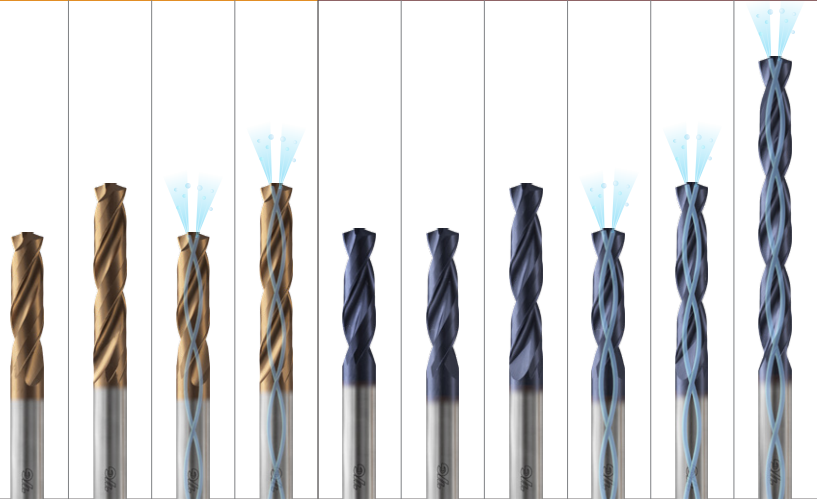

Please visit
globalyg1.com/mat
 for material search

◎ : Excellent ○ : Good

TECHNICAL DATA : P 97

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRC	DGN523	DGN526	DGN506	DGN508	DH404	DH423 DH443	DH424 DH444	DH406 DH446	DH408 DH448	DH421	
P	1	Non-alloy steel	About 0.15% C Annealed	125												
	2		About 0.45% C Annealed	190 13	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250 25	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	4		About 0.75% C Annealed	270 28	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300 32	○	○	○	○	○	○	○	○	○	○	○	○
	6	Low alloy steel	Annealed	180 10	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	7		Quenched & Tempered	275 29	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
	8		Quenched & Tempered	300 32	○	○	○	○	○	○	○	○	○	○	○	
	9		Quenched & Tempered	350 38	○	○	○	○	○	○	○	○	○	○	○	
	10	High alloyed steel, and tool steel	Annealed	200 15	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	11		Quenched & Tempered	325 35	○	○	○	○	○	○	○	○	○	○	○	
M	12	Stainless steel	Ferritic / Martensitic Annealed	200 15	○	○	○	○	○	○	○	○	○	○	○	
	13		Martensitic Quenched & Tempered	240 23	○	○	○	○	○	○	○	○	○	○		
	14		Austenitic	180 10												
K	15	Grey cast iron	Pearlitic / ferritic	180 10	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
	16		Pearlitic (Martensitic)	260 26	○	○	○	○	○	○	○	○	○	○		
	17	Nodular cast iron	Ferritic	160 3	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
	18		Pearlitic	250 25	○	○	○	○	○	○	○	○	○	○		
	19		Ferritic	130	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		
20	Malleable cast iron	Pearlitic	230 21	○	○	○	○	○	○	○	○	○	○			
N	21	Aluminum-wrought alloy	Not Curable	60												
	22		Curable Hardened	100												
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75												
	24		≤ 12% Si, Curable Hardened	90												
	25		> 12% Si, Not Curable	130												
	26		Cutting Alloys, PB>1%	110												
	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90												
	28		CuSn, lead-free copper and electrolytic copper	100												
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic													
	30		Rubber, Wood, etc.													
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200 15												
	32		Fe Based Cured	280 30												
	33		Annealed	250 25												
	34		Ni or Co Based Cured	350 38												
	35	Cast	320 34													
	36	Titanium Alloys	Pure Titanium	400 _m												
	37		Alpha + Beta Alloys Hardened	1050 _m												
H	38	Hardened steel	Hardened	550 55												
	39		Hardened	630 60												
	40	Chilled Cast Iron	Cast	400 42												
	41	Hardened Cast Iron	Hardened	550 55												