

TiAIN-COATED SOLID CARBIDE DREAM DRILLS General with Coolant Holes (5XD)

PLAIN SHANK

DH408 SERIES

FLAT SHANK

DH448 SERIES

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



DIN 6537
CARBIDE
h6
h6
m7
140°
20 bar
P. 40

LONG

5 × D

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408010	-	1.0	3	8	55
DH408011	-	1.1	3	12	55
DH408012	-	1.2	3	12	55
DH408013	-	1.3	3	12	55
DH408014	-	1.4	3	12	55
DH408015	-	1.5	3	16	55
DH408016	-	1.6	3	16	55
DH408017	-	1.7	3	16	55
DH408018	-	1.8	3	16	55
DH408019	-	1.9	3	16	55
DH408020	-	2.0	4	21	57
DH408021	-	2.1	4	21	57
DH408022	-	2.2	4	21	57
DH408023	-	2.3	4	21	57
DH408024	-	2.4	4	21	57
DH408025	-	2.5	4	21	57
DH408026	-	2.6	4	21	57
DH408027	-	2.7	4	21	57
DH408028	-	2.8	4	21	57
DH408029	-	2.9	4	21	57
DH408030	DH448030	3.0	6	28	66
DH408031	DH448031	3.1	6	28	66
DH408032	DH448032	3.2	6	28	66
DH408033	DH448033	3.3	6	28	66

Unit : mm

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408034	DH448034	3.4	6	28	66
DH408035	DH448035	3.5	6	28	66
DH408036	DH448036	3.6	6	28	66
DH408037	DH448037	3.7	6	28	66
DH408038	DH448038	3.8	6	36	74
DH408039	DH448039	3.9	6	36	74
DH408040	DH448040	4.0	6	36	74
DH408041	DH448041	4.1	6	36	74
DH408042	DH448042	4.2	6	36	74
DH408043	DH448043	4.3	6	36	74
DH408044	DH448044	4.4	6	36	74
DH408045	DH448045	4.5	6	36	74
DH408046	DH448046	4.6	6	36	74
DH408047	DH448047	4.7	6	36	74
DH408048	DH448048	4.8	6	44	82
DH408049	DH448049	4.9	6	44	82
DH408050	DH448050	5.0	6	44	82
DH408051	DH448051	5.1	6	44	82
DH408052	DH448052	5.2	6	44	82
DH408053	DH448053	5.3	6	44	82
DH408054	DH448054	5.4	6	44	82
DH408055	DH448055	5.5	6	44	82
DH408056	DH448056	5.6	6	44	82
DH408057	DH448057	5.7	6	44	82

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○	
ISO	N								S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

TiAIN-COATED SOLID CARBIDE DREAM DRILLS
General with Coolant Holes (5XD)

PLAIN SHANK

DH408 SERIES

FLAT SHANK

DH448 SERIES

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



DIN 6537
CARBIDE
h6
h6
m7
140°
20 bar
P. 40

LONG

5 × D

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408058	DH448058	5.8	6	44	82
DH408059	DH448059	5.9	6	44	82
DH408060	DH448060	6.0	6	44	82
DH408061	DH448061	6.1	8	53	91
DH408062	DH448062	6.2	8	53	91
DH408063	DH448063	6.3	8	53	91
DH408064	DH448064	6.4	8	53	91
DH408065	DH448065	6.5	8	53	91
DH408066	DH448066	6.6	8	53	91
DH408067	DH448067	6.7	8	53	91
DH408068	DH448068	6.8	8	53	91
DH408069	DH448069	6.9	8	53	91
DH408070	DH448070	7.0	8	53	91
DH408071	DH448071	7.1	8	53	91
DH408072	DH448072	7.2	8	53	91
DH408073	DH448073	7.3	8	53	91
DH408074	DH448074	7.4	8	53	91
DH408075	DH448075	7.5	8	53	91
DH408076	DH448076	7.6	8	53	91
DH408077	DH448077	7.7	8	53	91
DH408078	DH448078	7.8	8	53	91
DH408079	DH448079	7.9	8	53	91
DH408080	DH448080	8.0	8	53	91
DH408081	DH448081	8.1	10	61	103

Unit : mm

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408082	DH448082	8.2	10	61	103
DH408083	DH448083	8.3	10	61	103
DH408084	DH448084	8.4	10	61	103
DH408085	DH448085	8.5	10	61	103
DH408086	DH448086	8.6	10	61	103
DH408087	DH448087	8.7	10	61	103
DH408088	DH448088	8.8	10	61	103
DH408089	DH448089	8.9	10	61	103
DH408090	DH448090	9.0	10	61	103
DH408091	DH448091	9.1	10	61	103
DH408092	DH448092	9.2	10	61	103
DH408093	DH448093	9.3	10	61	103
DH408094	DH448094	9.4	10	61	103
DH408095	DH448095	9.5	10	61	103
DH408096	DH448096	9.6	10	61	103
DH408097	DH448097	9.7	10	61	103
DH408098	DH448098	9.8	10	61	103
DH408099	DH448099	9.9	10	61	103
DH408100	DH448100	10.0	10	61	103
DH408101	DH448101	10.1	12	71	118
DH408102	DH448102	10.2	12	71	118
DH408103	DH448103	10.3	12	71	118
DH408104	DH448104	10.4	12	71	118
DH408105	DH448105	10.5	12	71	118

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P									M				K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	◎	○	◎	○	◎	○	

ISO	N									S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

TiAIN-COATED SOLID CARBIDE DREAM DRILLS General with Coolant Holes (5XD)


PLAIN SHANK

DH408 SERIES

FLAT SHANK

DH448 SERIES

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

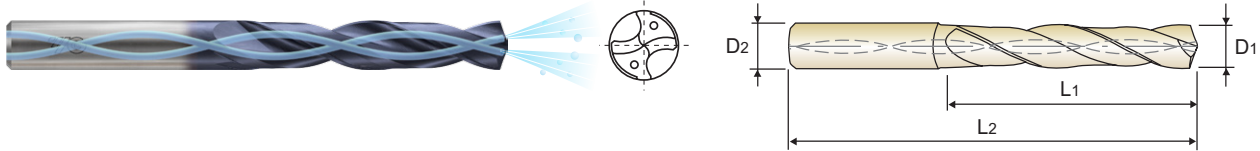

DIN 6537
CARBIDE
h6
h6
m7
140°
20 bar
P. 40

LONG

5 × D

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408106	DH448106	10.6	12	71	118
DH408107	DH448107	10.7	12	71	118
DH408108	DH448108	10.8	12	71	118
DH408109	DH448109	10.9	12	71	118
DH408110	DH448110	11.0	12	71	118
DH408111	DH448111	11.1	12	71	118
DH408112	DH448112	11.2	12	71	118
DH408113	DH448113	11.3	12	71	118
DH408114	DH448114	11.4	12	71	118
DH408115	DH448115	11.5	12	71	118
DH408116	DH448116	11.6	12	71	118
DH408117	DH448117	11.7	12	71	118
DH408118	DH448118	11.8	12	71	118
DH408119	DH448119	11.9	12	71	118
DH408120	DH448120	12.0	12	71	118
DH408125	DH448125	12.5	14	77	124

Unit : mm

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH408130	DH448130	13.0	14	77	124
DH408135	DH448135	13.5	14	77	124
DH408140	DH448140	14.0	14	77	124
DH408145	DH448145	14.5	16	83	133
DH408150	DH448150	15.0	16	83	133
DH408155	DH448155	15.5	16	83	133
DH408160	DH448160	16.0	16	83	133
DH408165	DH448165	16.5	18	93	143
DH408170	DH448170	17.0	18	93	143
DH408175	DH448175	17.5	18	93	143
DH408180	DH448180	18.0	18	93	143
DH408185	DH448185	18.5	20	101	153
DH408190	DH448190	19.0	20	101	153
DH408195	DH448195	19.5	20	101	153
DH408200	DH448200	20.0	20	101	153

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	130	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○	
ISO	N										S					H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

DH406, DH446, DH408, DH448, DH421 SERIES with COOLANT HOLES

Vc = m/min
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)		Vc	Parameter	Drill Diameter (mm)			
					1.0	2.0			3.0	4.0	5.0	6.0
P	2	Non-alloy steel	80	RPM	25460	12730	110	RPM	11670	8750	7000	5840
				FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
			3	80	RPM	25460	12730	110	RPM	11670	8750	7000
	FEED				0.03-0.05	0.05-0.07	FEED		0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
	4		80	RPM	25460	12730	110	RPM	11670	8750	7000	5840
				FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
	5		70	RPM	22280	11140	90	RPM	9550	7160	5730	4770
				FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
	6		80	RPM	25460	12730	110	RPM	11670	8750	7000	5840
				FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
	7		70	RPM	22280	11140	90	RPM	9550	7160	5730	4770
FEED		0.03-0.05		0.05-0.07	FEED	0.06-0.12		0.08-0.14	0.10-0.20	0.12-0.24		
8	70	RPM	22280	11140	90	RPM	9550	7160	5730	4770		
		FEED	0.02-0.04	0.03-0.05		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18		
9	40	RPM	12730	6370	50	RPM	5310	3980	3180	2650		
		FEED	0.02-0.04	0.03-0.05		FEED	0.03-0.08	0.05-0.11	0.08-0.14	0.10-0.16		
10	60	RPM	19100	9550	80	RPM	8490	6370	5090	4240		
		FEED	0.03-0.05	0.05-0.07		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18		
11	40	RPM	12730	6370	45	RPM	4770	3580	2860	2390		
		FEED	0.02-0.04	0.03-0.05		FEED	0.03-0.08	0.05-0.11	0.08-0.14	0.10-0.16		
M	12	Stainless steel	60	RPM	19100	9550	80	RPM	8490	6370	5090	4240
				FEED	0.03-0.05	0.05-0.07		FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
13	45	RPM	14320	7160	55	RPM	5840	4380	3500	2920		
		FEED	0.02-0.04	0.03-0.05		FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18		
K	15	Grey cast iron	80	RPM	25460	12730	110	RPM	11670	8750	7000	5840
				FEED	0.04-0.06	0.04-0.06		FEED	0.08-0.14	0.12-0.18	0.18-0.24	0.14-0.26
	16	75	RPM	23870	11940	95	RPM	10080	7560	6050	5040	
			FEED	0.04-0.06	0.04-0.06		FEED	0.06-0.12	0.08-0.14	0.14-0.2	0.16-0.22	
	17	90	RPM	28650	14320	120	RPM	12730	9550	7640	6370	
			FEED	0.04-0.06	0.04-0.06		FEED	0.08-0.14	0.12-0.18	0.18-0.24	0.14-0.26	
18	60	RPM	19100	9550	80	RPM	8490	6370	5090	4240		
		FEED	0.04-0.06	0.04-0.06		FEED	0.06-0.12	0.08-0.14	0.14-0.2	0.16-0.22		
19	70	RPM	22280	11140	90	RPM	9550	7160	5730	4770		
		FEED	0.04-0.06	0.04-0.06		FEED	0.08-0.14	0.12-0.18	0.18-0.24	0.14-0.26		
20	60	RPM	19100	9550	80	RPM	8490	6370	5090	4240		
FEED	0.03-0.05	0.05-0.07	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22					

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)						
					8.0	10.0	12.0	14.0	16.0	18.0	20.0
P	2	Non-alloy steel	110	RPM	4380	3500	2920	2500	2190	1950	1750
				FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
			3	110	RPM	4380	3500	2920	2500	2190	1950
	FEED				0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
	4		110	RPM	4380	3500	2920	2500	2190	1950	1750
				FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
	5		90	RPM	3580	2860	2390	2050	1790	1590	1430
				FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32
	6		110	RPM	4380	3500	2920	2500	2190	1950	1750
				FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
	7		90	RPM	3580	2860	2390	2050	1790	1590	1430
FEED		0.16-0.28		0.20-0.30	0.21-0.30	0.22-0.35	0.25-0.36	0.28-0.38	0.30-0.40		
8	90	RPM	3580	2860	2390	2050	1790	1590	1430		
		FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32		
9	50	RPM	1990	1590	1330	1140	990	880	800		
		FEED	0.12-0.18	0.14-0.20	0.12-0.22	0.13-0.23	0.14-0.24	0.16-0.26	0.18-0.28		
10	80	RPM	3180	2550	2120	1820	1590	1410	1270		
		FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32		
11	45	RPM	1790	1430	1190	1020	900	800	720		
		FEED	0.12-0.18	0.14-0.20	0.12-0.22	0.13-0.23	0.14-0.24	0.16-0.26	0.18-0.28		
M	12	Stainless steel	80	RPM	3180	2550	2120	1820	1590	1410	1270
				FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40
13	55	RPM	2190	1750	1460	1250	1090	970	880		
		FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30	0.22-0.32		
K	15	Grey cast iron	110	RPM	4380	3500	2920	2500	2190	1950	1750
				FEED	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.3-0.40	0.32-0.42	0.34-0.44
	16	95	RPM	3780	3020	2520	2160	1890	1680	1510	
			FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40	
	17	120	RPM	4770	3820	3180	2730	2390	2120	1910	
			FEED	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44	
18	80	RPM	3180	2550	2120	1820	1590	1410	1270		
		FEED	0.18-0.24	0.22-0.28	0.2-0.3	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40		
19	90	RPM	3580	2860	2390	2050	1790	1590	1430		
		FEED	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.32-0.42	0.34-0.44		
20	80	RPM	3180	2550	2120	1820	1590	1410	1270		
FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.28-0.38	0.30-0.40				

► Recommend to reduce the feed rate as following

Feed 100% : DH406(3×D), DH408(5×D) Feed 75% : DH421(8×D)

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES
 DRILLING DEPTH / STANDARD
 LENGTH
 SIZE MIN
 SIZE MAX
 PAGE

PRO ^{NEW}				GENERAL					
DGN523	DGN526	DGN506	DGN508	DH404	DH423 DH443	DH424 DH444	DH406 DH446	DH408 DH448	DH421
3XD	5XD	3XD	5XD	3XD	3XD	5XD	3XD	5XD	8XD
SHORT	LONG	SHORT	LONG	STUB	SHORT	LONG	SHORT	LONG	EXTRALONG
D3.0	D1.0	D3.0	D1.0	D3.0	D32.0	D1.0	D3.0	D1.0	D3.0
D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D14.0
8	11	14	16	24	26	29	32	34	37

SURFACE TREATMENT

Z-Coating

TiAIN

SOLID CARBIDE **DREAM DRILLS**



Please visit
globalyg1.com/mat
 for material search

◎ : Excellent ○ : Good

TECHNICAL DATA : P 97

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRC	DGN523	DGN526	DGN506	DGN508	DH404	DH423 DH443	DH424 DH444	DH406 DH446	DH408 DH448	DH421	
P	1	Non-alloy steel	About 0.15% C Annealed	125												
	2		About 0.45% C Annealed	190 13	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250 25	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	4		About 0.75% C Annealed	270 28	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300 32	○	○	○	○	○	○	○	○	○	○	○	○
	6	Low alloy steel	Annealed	180 10	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	7		Quenched & Tempered	275 29	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	8		Quenched & Tempered	300 32	○	○	○	○	○	○	○	○	○	○	○	○
	9		Quenched & Tempered	350 38	○	○	○	○	○	○	○	○	○	○	○	○
	10		High alloyed steel, and tool steel	Annealed	200 15	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	11	Quenched & Tempered		325 35	○	○	○	○	○	○	○	○	○	○	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200 15	○	○	○	○	○	○	○	○	○	○	○	
	13		Martensitic Quenched & Tempered	240 23	○	○	○	○	○	○	○	○	○	○	○	
	14		Austenitic	180 10												
K	15	Grey cast iron	Pearlitic / ferritic	180 10	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
	16		Pearlitic (Martensitic)	260 26	○	○	○	○	○	○	○	○	○	○	○	
	17	Nodular cast iron	Ferritic	160 3	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
	18		Pearlitic	250 25	○	○	○	○	○	○	○	○	○	○	○	
	19		Malleable cast iron	130	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
20	Pearlitic	230 21	○	○	○	○	○	○	○	○	○	○	○	○		
N	21	Aluminum-wrought alloy	Not Curable	60												
	22		Curable Hardened	100												
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75												
	24		≤ 12% Si, Curable Hardened	90												
	25		> 12% Si, Not Curable	130												
	26		Cutting Alloys, PB>1%	110												
	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90												
	28		CuSn, lead-free copper and electrolytic copper	100												
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic													
	30		Rubber, Wood, etc.													
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200 15											
	32			Cured	280 30											
	33		Ni or Co Based	Annealed	250 25											
	34			Cured	350 38											
	35			Cast	320 34											
	36	Titanium Alloys	Pure Titanium	400 _m												
	37		Alpha + Beta Alloys Hardened	1050 _m												
H	38	Hardened steel		Hardened	550 55											
	39			Hardened	630 60											
	40	Chilled Cast Iron	Cast	400 42												
	41	Hardened Cast Iron	Hardened	550 55												