

TiAIN-COATED SOLID CARBIDE DREAM DRILLS General with Coolant Holes (3XD)

PLAIN SHANK

DH406 SERIES

FLAT SHANK

DH446 SERIES

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation



SHORT

3 × D

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406030	DH446030	3.0	6	20	62
DH406031	DH446031	3.1	6	20	62
DH406032	DH446032	3.2	6	20	62
DH406033	DH446033	3.3	6	20	62
DH406034	DH446034	3.4	6	20	62
DH406035	DH446035	3.5	6	20	62
DH406036	DH446036	3.6	6	20	62
DH406037	DH446037	3.7	6	20	62
DH406038	DH446038	3.8	6	24	66
DH406039	DH446039	3.9	6	24	66
DH406040	DH446040	4.0	6	24	66
DH406041	DH446041	4.1	6	24	66
DH406042	DH446042	4.2	6	24	66
DH406043	DH446043	4.3	6	24	66
DH406044	DH446044	4.4	6	24	66
DH406045	DH446045	4.5	6	24	66
DH406046	DH446046	4.6	6	24	66
DH406047	DH446047	4.7	6	24	66
DH406048	DH446048	4.8	6	28	66
DH406049	DH446049	4.9	6	28	66
DH406050	DH446050	5.0	6	28	66
DH406051	DH446051	5.1	6	28	66
DH406052	DH446052	5.2	6	28	66
DH406053	DH446053	5.3	6	28	66
DH406054	DH446054	5.4	6	28	66
DH406055	DH446055	5.5	6	28	66

Unit : mm

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406056	DH446056	5.6	6	28	66
DH406057	DH446057	5.7	6	28	66
DH406058	DH446058	5.8	6	28	66
DH406059	DH446059	5.9	6	28	66
DH406060	DH446060	6.0	6	28	66
DH406061	DH446061	6.1	8	34	79
DH406062	DH446062	6.2	8	34	79
DH406063	DH446063	6.3	8	34	79
DH406064	DH446064	6.4	8	34	79
DH406065	DH446065	6.5	8	34	79
DH406066	DH446066	6.6	8	34	79
DH406067	DH446067	6.7	8	34	79
DH406068	DH446068	6.8	8	34	79
DH406069	DH446069	6.9	8	34	79
DH406070	DH446070	7.0	8	34	79
DH406071	DH446071	7.1	8	41	79
DH406072	DH446072	7.2	8	41	79
DH406073	DH446073	7.3	8	41	79
DH406074	DH446074	7.4	8	41	79
DH406075	DH446075	7.5	8	41	79
DH406076	DH446076	7.6	8	41	79
DH406077	DH446077	7.7	8	41	79
DH406078	DH446078	7.8	8	41	79
DH406079	DH446079	7.9	8	41	79
DH406080	DH446080	8.0	8	41	79
DH406081	DH446081	8.1	10	47	89

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M					K				
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	30	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○
ISO	N										S									
Material Description	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42
HB											200	280	250	350	320			550	630	400
Recommended																				

TiAIN-COATED SOLID CARBIDE DREAM DRILLS General with Coolant Holes (3XD)


PLAIN SHANK

DH406 SERIES

FLAT SHANK

DH446 SERIES

- ▶ Drilling for Steel, Cast Steel, Cast Iron, Malleable Cast Iron
- ▶ Self centering and chip breaking by R-thinning
- ▶ Wave shape and negative land on the cutting edge for low thrust, stable torque and long tool life
- ▶ Optimized flute shape for strength of drilling and smooth chip evacuation

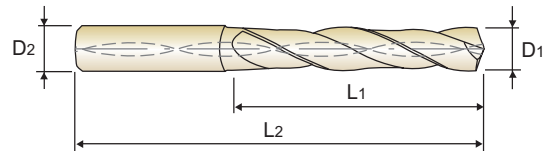

DIN
6537

CARBIDE

h6

h6

m7

140°

20 bar

P. 40

SHORT

3 × D

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406082	DH446082	8.2	10	47	89
DH406083	DH446083	8.3	10	47	89
DH406084	DH446084	8.4	10	47	89
DH406085	DH446085	8.5	10	47	89
DH406086	DH446086	8.6	10	47	89
DH406087	DH446087	8.7	10	47	89
DH406088	DH446088	8.8	10	47	89
DH406089	DH446089	8.9	10	47	89
DH406090	DH446090	9.0	10	47	89
DH406091	DH446091	9.1	10	47	89
DH406092	DH446092	9.2	10	47	89
DH406093	DH446093	9.3	10	47	89
DH406094	DH446094	9.4	10	47	89
DH406095	DH446095	9.5	10	47	89
DH406096	DH446096	9.6	10	47	89
DH406097	DH446097	9.7	10	47	89
DH406098	DH446098	9.8	10	47	89
DH406099	DH446099	9.9	10	47	89
DH406100	DH446100	10.0	10	47	89
DH406101	DH446101	10.1	12	55	102
DH406102	DH446102	10.2	12	55	102
DH406103	DH446103	10.3	12	55	102
DH406104	DH446104	10.4	12	55	102
DH406105	DH446105	10.5	12	55	102
DH406106	DH446106	10.6	12	55	102
DH406107	DH446107	10.7	12	55	102
DH406108	DH446108	10.8	12	55	102
DH406109	DH446109	10.9	12	55	102

EDP No. (TiAIN)		Drill Diameter	Shank Diameter	Flute Length	Overall Length
Plain	Flat	D1	D2	L1	L2
DH406110	DH446110	11.0	12	55	102
DH406111	DH446111	11.1	12	55	102
DH406112	DH446112	11.2	12	55	102
DH406113	DH446113	11.3	12	55	102
DH406114	DH446114	11.4	12	55	102
DH406115	DH446115	11.5	12	55	102
DH406116	DH446116	11.6	12	55	102
DH406117	DH446117	11.7	12	55	102
DH406118	DH446118	11.8	12	55	102
DH406119	DH446119	11.9	12	55	102
DH406120	DH446120	12.0	12	55	102
DH406125	DH446125	12.5	14	60	107
DH406130	DH446130	13.0	14	60	107
DH406135	DH446135	13.5	14	60	107
DH406140	DH446140	14.0	14	60	107
DH406145	DH446145	14.5	16	65	115
DH406150	DH446150	15.0	16	65	115
DH406155	DH446155	15.5	16	65	115
DH406160	DH446160	16.0	16	65	115
DH406165	DH446165	16.5	18	73	123
DH406170	DH446170	17.0	18	73	123
DH406175	DH446175	17.5	18	73	123
DH406180	DH446180	18.0	18	73	123
DH406185	DH446185	18.5	20	79	131
DH406190	DH446190	19.0	20	79	131
DH406195	DH446195	19.5	20	79	131
DH406200	DH446200	20.0	20	79	131

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M					K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended		◎	◎	◎	○	◎	◎	○	○	◎	○	○	○	○	◎	○	◎	○	◎	○	
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast iron	Hardened Cast iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																					

DH406, DH446, DH408, DH448, DH421 SERIES with COOLANT HOLES

Vc = m/min
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)		Vc	Parameter	Drill Diameter (mm)			
					1.0	2.0			3.0	4.0	5.0	6.0
P	2	Non-alloy steel	80	RPM	25460	12730	110	RPM	11670	8750	7000	5840
	3		80	FEED	0.03-0.05	0.05-0.07	110	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
	4		80	RPM	25460	12730	110	RPM	11670	8750	7000	5840
	5		70	FEED	0.03-0.05	0.05-0.07	90	FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
	6	Low alloy steel	80	RPM	22280	11140	90	RPM	9550	7160	5730	4770
	7		80	FEED	0.03-0.05	0.05-0.07	110	FEED	0.06-0.12	0.08-0.14	0.14-0.20	0.16-0.22
	8		70	RPM	22280	11140	90	RPM	9550	7160	5730	4770
	9		70	FEED	0.03-0.05	0.05-0.07	90	FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
	10	High alloyed steel, and tool steel	40	RPM	12730	6370	50	RPM	5310	3980	3180	2650
	11		40	FEED	0.02-0.04	0.03-0.05	45	FEED	0.03-0.08	0.05-0.11	0.08-0.14	0.10-0.16
M	12	Stainless steel	60	RPM	19100	9550	80	RPM	8490	6370	5090	4240
	13		45	FEED	0.03-0.05	0.05-0.07	55	FEED	0.04-0.10	0.07-0.13	0.10-0.16	0.12-0.18
K	15	Grey cast iron	80	RPM	25460	12730	110	RPM	11670	8750	7000	5840
	16		75	FEED	0.04-0.06	0.04-0.06	95	FEED	0.08-0.14	0.12-0.18	0.18-0.24	0.14-0.26
	17	Nodular cast iron	90	RPM	23870	11940	120	RPM	10080	7560	6050	5040
	18		60	FEED	0.04-0.06	0.04-0.06	80	FEED	0.06-0.12	0.08-0.14	0.14-0.2	0.16-0.22
	19	Malleable cast iron	70	RPM	28650	14320	90	RPM	12730	9550	7640	6370
	20		60	FEED	0.04-0.06	0.04-0.06	80	FEED	0.08-0.14	0.12-0.18	0.18-0.24	0.14-0.26

ISO	VDI 3323	Material Description	Vc	Parameter	Drill Diameter (mm)					
					8.0	10.0	12.0	14.0	16.0	20.0
P	2	Non-alloy steel	110	RPM	4380	3500	2920	2500	2190	1750
	3		110	FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.30-0.40
	4		110	RPM	4380	3500	2920	2500	2190	1750
	5		90	FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.30-0.40
	6	Low alloy steel	110	RPM	4380	3500	2920	2500	2190	1750
	7		90	FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30
	8		90	RPM	3580	2860	2390	2050	1790	1430
	9		50	FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30
	10	High alloyed steel, and tool steel	80	RPM	3180	2550	2120	1820	1590	1270
	11		45	FEED	0.12-0.18	0.14-0.20	0.12-0.22	0.13-0.23	0.14-0.24	0.16-0.26
M	12	Stainless steel	80	RPM	3180	2550	2120	1820	1590	1270
	13		55	FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.30-0.40
K	15	Grey cast iron	110	RPM	2190	1750	1460	1250	1090	880
	16		95	FEED	0.14-0.20	0.18-0.24	0.14-0.24	0.16-0.26	0.18-0.28	0.20-0.30
	17	Nodular cast iron	120	RPM	4380	3500	2920	2500	2190	1750
	18		80	FEED	0.16-0.28	0.24-0.34	0.26-0.36	0.28-0.38	0.30-0.40	0.34-0.44
	19	Malleable cast iron	90	RPM	3780	3020	2520	2160	1890	1510
	20		80	FEED	0.18-0.24	0.22-0.28	0.20-0.30	0.22-0.32	0.24-0.34	0.30-0.40

► Recommend to reduce the feed rate as following

Feed 100% : DH406(3×D), DH408(5×D) Feed 75% : DH421(8×D)

SELECTION GUIDE



HOLEMAKING TOOLS

SERIES
DRILLING DEPTH / STANDARD
LENGTH
SIZE MIN
SIZE MAX
PAGE

PRO ^{NEW}				GENERAL					
DGN523	DGN526	DGN506	DGN508	DH404	DH423 DH443	DH424 DH444	DH406 DH446	DH408 DH448	DH421
3XD	5XD	3XD	5XD	3XD	3XD	5XD	3XD	5XD	8XD
SHORT	LONG	SHORT	LONG	STUB	SHORT	LONG	SHORT	LONG	EXTRA LONG
D3.0	D1.0	D3.0	D1.0	D3.0	D32.0	D1.0	D3.0	D1.0	D3.0
D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D14.0
8	11	14	16	24	26	29	32	34	37

SURFACE TREATMENT

Z-Coating

TiAIN

SOLID CARBIDE
**DREAM
DRILLS**



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

TECHNICAL DATA : P 97

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRC										
P	1	Non-alloy steel	About 0.15% C	Annealed	125											
	2		About 0.45% C	Annealed	190	13	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	3		About 0.45% C	Quenched & Tempered	250	25	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	4		About 0.75% C	Annealed	270	28	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	5		About 0.75% C	Quenched & Tempered	300	32	○	○	○	○	○	○	○	○	○	○
	6	Low alloy steel		Annealed	180	10	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	7			Quenched & Tempered	275	29	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	8			Quenched & Tempered	300	32	○	○	○	○	○	○	○	○	○	○
	9			Quenched & Tempered	350	38	○	○	○	○	○	○	○	○	○	○
	10	High alloyed steel, and tool steel		Annealed	200	15	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	11			Quenched & Tempered	325	35	○	○	○	○	○	○	○	○	○	○
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	○	○	○	○	○	○	○	○	○	○
	13		Martensitic	Quenched & Tempered	240	23	○	○	○	○	○	○	○	○	○	○
	14		Austenitic		180	10										
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	16		Pearlitic (Martensitic)		260	26	○	○	○	○	○	○	○	○	○	○
	17	Nodular cast iron	Ferritic		160	3	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	18		Pearlitic		250	25	○	○	○	○	○	○	○	○	○	○
	19	Malleable cast iron	Ferritic		130		◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
	20		Pearlitic		230	21	○	○	○	○	○	○	○	○	○	○
N	21	Aluminum-wrought alloy	Not Curable		60											
	22		Curable	Hardened	100											
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75											
	24		≤ 12% Si, Curable	Hardened	90											
	25		> 12% Si, Not Curable		130											
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110											
	27		CuZn, CuSnZn (Brass)		90											
	28		CuSn, lead-free copper and electrolytic copper		100											
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic													
	30		Rubber, Wood, etc.													
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15										
	32			Cured	280	30										
	33		Ni or Co Based	Annealed	250	25										
	34			Cured	350	38										
	35			Cast	320	34										
	36	Titanium Alloys	Pure Titanium		400 _m											
	37		Alpha + Beta Alloys	Hardened	1050 _m											
H	38	Hardened steel		Hardened	550	55										
	39			Hardened	630	60										
	40	Chilled Cast Iron		Cast	400	42										
	41	Hardened Cast Iron		Hardened	550	55										