




DREAM DRILLS - HIGH FEED


DGR495 SERIES

CARBIDE, DREAM DRILLS - HIGH FEED with COOLANT HOLES LONG

-  DREAM DRILLS HIGH FEED mit KÜHLKANAL KURZ
-  Forets DREAM DRILLS carbure Grande Avance avec arrosage central, série longue LONGUE
-  PUNTE DREAM DRILL HIGH FEED (con i fori di refrigerazione) LUNGA

- ▶ Drilling for Carbon Steels, Alloy Steels(-HRc35) and Cast Iron
- ▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
- ▶ Multi-Layer coating delivers much better productivity and reliability
- ▶ Self centering and chip breaking by R-thinning and coolant holes

- ▶ Bohren von Kohlenstoff-Stählen, legierten Stählen(-HRc35) und Gusseisen
- ▶ Höhere Produktivität durch den 1,5 bis 2-fach höheren Vorschub gegenüber herkömmlichen zweischneidigen Bohren
- ▶ Die Multi-Layer Beschichtung ermöglicht eine bessere Produktivität und Zuverlässigkeit
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung

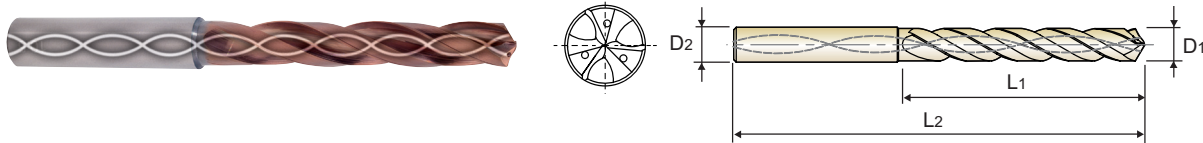










P.105

5 × D

Unit : mm

| EDP No. | Drill Diameter | Shank Diameter | Flute Length | Overall Length |
|-----------|----------------|----------------|--------------|----------------|
| H-Coating | D1 | D2 | L1 | L2 |
| DGR495050 | 5.0 | 6 | 44 | 82 |
| DGR495051 | 5.1 | 6 | 44 | 82 |
| DGR495052 | 5.2 | 6 | 44 | 82 |
| DGR495053 | 5.3 | 6 | 44 | 82 |
| DGR495054 | 5.4 | 6 | 44 | 82 |
| DGR495055 | 5.5 | 6 | 44 | 82 |
| DGR495056 | 5.6 | 6 | 44 | 82 |
| DGR495057 | 5.7 | 6 | 44 | 82 |
| DGR495058 | 5.8 | 6 | 44 | 82 |
| DGR495059 | 5.9 | 6 | 44 | 82 |
| DGR495060 | 6.0 | 6 | 44 | 82 |
| DGR495061 | 6.1 | 8 | 53 | 91 |
| DGR495062 | 6.2 | 8 | 53 | 91 |
| DGR495063 | 6.3 | 8 | 53 | 91 |
| DGR495064 | 6.4 | 8 | 53 | 91 |
| DGR495065 | 6.5 | 8 | 53 | 91 |
| DGR495066 | 6.6 | 8 | 53 | 91 |
| DGR495067 | 6.7 | 8 | 53 | 91 |
| DGR495068 | 6.8 | 8 | 53 | 91 |
| DGR495069 | 6.9 | 8 | 53 | 91 |
| DGR495070 | 7.0 | 8 | 53 | 91 |
| DGR495071 | 7.1 | 8 | 53 | 91 |
| DGR495072 | 7.2 | 8 | 53 | 91 |
| DGR495073 | 7.3 | 8 | 53 | 91 |

| EDP No. | Drill Diameter | Shank Diameter | Flute Length | Overall Length |
|-----------|----------------|----------------|--------------|----------------|
| H-Coating | D1 | D2 | L1 | L2 |
| DGR495074 | 7.4 | 8 | 53 | 91 |
| DGR495075 | 7.5 | 8 | 53 | 91 |
| DGR495076 | 7.6 | 8 | 53 | 91 |
| DGR495077 | 7.7 | 8 | 53 | 91 |
| DGR495078 | 7.8 | 8 | 53 | 91 |
| DGR495079 | 7.9 | 8 | 53 | 91 |
| DGR495080 | 8.0 | 8 | 53 | 91 |
| DGR495081 | 8.1 | 10 | 61 | 103 |
| DGR495082 | 8.2 | 10 | 61 | 103 |
| DGR495083 | 8.3 | 10 | 61 | 103 |
| DGR495084 | 8.4 | 10 | 61 | 103 |
| DGR495085 | 8.5 | 10 | 61 | 103 |
| DGR495086 | 8.6 | 10 | 61 | 103 |
| DGR495087 | 8.7 | 10 | 61 | 103 |
| DGR495088 | 8.8 | 10 | 61 | 103 |
| DGR495089 | 8.9 | 10 | 61 | 103 |
| DGR495090 | 9.0 | 10 | 61 | 103 |
| DGR495091 | 9.1 | 10 | 61 | 103 |
| DGR495092 | 9.2 | 10 | 61 | 103 |
| DGR495093 | 9.3 | 10 | 61 | 103 |
| DGR495094 | 9.4 | 10 | 61 | 103 |
| DGR495095 | 9.5 | 10 | 61 | 103 |
| DGR495096 | 9.6 | 10 | 61 | 103 |
| DGR495097 | 9.7 | 10 | 61 | 103 |

▶ Other shank types are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

| ISO | P | | | | | | | | | | M | | | | K | | | | | | |
|----------------------|------------------------|-----|------------------------|-----|-----|---|-----|-----|------------------------|-----|------------------------------------|-----|-----------------|-----|----------------|-----------------|-------------------|----------------|---------------------|--------------------|-----|
| | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | | Stainless steel | | Grey cast iron | | Nodular cast iron | | Malleable cast iron | | |
| Material Description | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| VDI 3323 | | | | | | | | | | | | | | | | | | | | | |
| HRc | 13 | 25 | 28 | 32 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |
| ISO | N | | | | | | | | | | S | | | | | | | H | | | |
| | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | | Heat Resistant Super Alloys | | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | |
| Material Description | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| VDI 3323 | | | | | | | | | | | | | | | | | | | | | |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400Rm | 1050Rm | 550 | 630 | 400 | 550 |
| Recommended | | | | | | | | | | | | | | | | | | | | | |



CARBIDE, DREAM DRILLS - HIGH FEED with COOLANT HOLES

LONG

DREAM DRILLS HIGH FEED mit KÜHLKANAL

KURZ

Forets DREAM DRILLS carbure Grande Avance avec arrosage central, série longue


LONGUE

PUNTE DREAM DRILL HIGH FEED (con i fori di refrigerazione)

LUNGA

- ▶ Drilling for Carbon Steels, Alloy Steels(-HRc35) and Cast Iron
- ▶ Higher productivity due to 1.5 to 2 times faster feeding speed than 2-flute drill
- ▶ Multi-Layer coating delivers much better productivity and reliability
- ▶ Self centering and chip breaking by R-thinning and coolant holes

- ▶ Bohren von Kohlenstoff-Stählen, legierten Stählen(-HRc35) und Gusseisen
- ▶ Höhere Produktivität durch den 1,5 bis 2-fach höheren Vorschub gegenüber herkömmlichen zweischneidigen Bohren
- ▶ Die Multi-Layer Beschichtung ermöglicht eine bessere Produktivität und Zuverlässigkeit
- ▶ Selbst zentrierend und guter Spanbruch durch die R-Ausspitzung

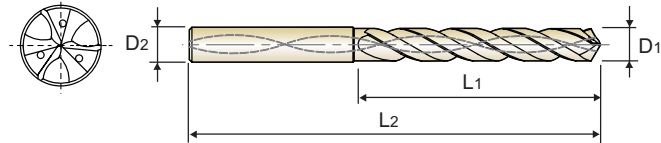

DIN 6537 **CARBIDE** 30° h6 m7 140° 20 bar

P.105

5 x D

Unit : mm

| EDP No. | Drill Diameter | Shank Diameter | Flute Length | Overall Length |
|-----------|----------------|----------------|--------------|----------------|
| H-Coating | D1 | D2 | L1 | L2 |
| DGR495098 | 9.8 | 10 | 61 | 103 |
| DGR495099 | 9.9 | 10 | 61 | 103 |
| DGR495100 | 10.0 | 10 | 61 | 103 |
| DGR495101 | 10.1 | 12 | 71 | 118 |
| DGR495102 | 10.2 | 12 | 71 | 118 |
| DGR495103 | 10.3 | 12 | 71 | 118 |
| DGR495104 | 10.4 | 12 | 71 | 118 |
| DGR495105 | 10.5 | 12 | 71 | 118 |
| DGR495106 | 10.6 | 12 | 71 | 118 |
| DGR495107 | 10.7 | 12 | 71 | 118 |
| DGR495108 | 10.8 | 12 | 71 | 118 |
| DGR495109 | 10.9 | 12 | 71 | 118 |
| DGR495110 | 11.0 | 12 | 71 | 118 |
| DGR495111 | 11.1 | 12 | 71 | 118 |
| DGR495112 | 11.2 | 12 | 71 | 118 |
| DGR495113 | 11.3 | 12 | 71 | 118 |
| DGR495114 | 11.4 | 12 | 71 | 118 |
| DGR495115 | 11.5 | 12 | 71 | 118 |
| DGR495116 | 11.6 | 12 | 71 | 118 |
| DGR495117 | 11.7 | 12 | 71 | 118 |

| EDP No. | Drill Diameter | Shank Diameter | Flute Length | Overall Length |
|-----------|----------------|----------------|--------------|----------------|
| H-Coating | D1 | D2 | L1 | L2 |
| DGR495118 | 11.8 | 12 | 71 | 118 |
| DGR495119 | 11.9 | 12 | 71 | 118 |
| DGR495120 | 12.0 | 12 | 71 | 118 |
| DGR495125 | 12.5 | 14 | 77 | 124 |
| DGR495130 | 13.0 | 14 | 77 | 124 |
| DGR495135 | 13.5 | 14 | 77 | 124 |
| DGR495140 | 14.0 | 14 | 77 | 124 |
| DGR495145 | 14.5 | 16 | 83 | 133 |
| DGR495150 | 15.0 | 16 | 83 | 133 |
| DGR495155 | 15.5 | 16 | 83 | 133 |
| DGR495160 | 16.0 | 16 | 83 | 133 |
| DGR495165 | 16.5 | 18 | 93 | 143 |
| DGR495170 | 17.0 | 18 | 93 | 143 |
| DGR495175 | 17.5 | 18 | 93 | 143 |
| DGR495180 | 18.0 | 18 | 93 | 143 |
| DGR495185 | 18.5 | 20 | 101 | 153 |
| DGR495190 | 19.0 | 20 | 101 | 153 |
| DGR495195 | 19.5 | 20 | 101 | 153 |
| DGR495200 | 20.0 | 20 | 101 | 153 |

▶ Other shank types are available on your request.

◎ : Excellent ○ : Good

| ISO | P | | | | | | | | | | M | | | | K | | | | | | |
|----------------------|------------------------|-----|------------------------|-----|-----|---|-----|-----|------------------------|-----------------------------|------------------------------------|-----------------|-----|-----------------|----------------|-------------------|-------------------|---------------------|-----|-----|-----|
| Material Description | Non-alloy steel | | | | | Low alloy steel | | | | | High alloyed steel, and tool steel | Stainless steel | | | Grey cast iron | Nodular cast iron | | Malleable cast iron | | | |
| VDI 3323 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | |
| HRc | 13 | 25 | 28 | 32 | 10 | 29 | 32 | 38 | 15 | 35 | 15 | 23 | 10 | 10 | 26 | 3 | 25 | | | 21 | |
| HB | 125 | 190 | 250 | 270 | 300 | 180 | 275 | 300 | 350 | 200 | 325 | 200 | 240 | 180 | 180 | 260 | 160 | 250 | 130 | 230 | |
| Recommended | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | ◎ | |
| ISO | N | | | | | | | | S | | | | | | | H | | | | | |
| Material Description | Aluminum-wrought alloy | | Aluminum-cast, alloyed | | | Copper and Copper Alloys (Bronze / Brass) | | | Non Metallic Materials | Heat Resistant Super Alloys | | | | Titanium Alloys | | Hardened steel | Chilled Cast Iron | Hardened Cast Iron | | | |
| VDI 3323 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 |
| HRc | | | | | | | | | | | 15 | 30 | 25 | 38 | 34 | | | 55 | 60 | 42 | 55 |
| HB | 60 | 100 | 75 | 90 | 130 | 110 | 90 | 100 | | | 200 | 280 | 250 | 350 | 320 | 400Rm | 1050Rm | 550 | 630 | 400 | 550 |
| Recommended | | | | | | | | | | | | | | | | | | | | | |



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

DRG493, DRG495 SERIES with COOLANT HOLES

RPM = rev./min.
FEED = mm/rev.

| ISO | VDI 3323 | Material Description | Vc (m/min) | Parameter | Drill Diameter (mm) | | | | | | | | |
|------------------------------------|---|-----------------------------|------------|-----------|---------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | | | | | 5.0 | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 18.0 | 20.0 |
| P | 1 | Non-alloy steel | 100 | RPM | 6370 | 5310 | 3980 | 3180 | 2650 | 2270 | 1990 | 1770 | 1590 |
| | 2 | | | FEED | 0.2-0.25 | 0.24-0.3 | 0.32-0.4 | 0.4-0.5 | 0.48-0.6 | 0.56-0.7 | 0.56-0.72 | 0.63-0.81 | 0.7-0.88 |
| | 3 | | RPM | 6370 | 5310 | 3980 | 3180 | 2650 | 2270 | 1990 | 1770 | 1590 | |
| | 4 | | FEED | 0.2-0.25 | 0.24-0.3 | 0.32-0.4 | 0.4-0.5 | 0.48-0.6 | 0.56-0.7 | 0.56-0.72 | 0.63-0.81 | 0.7-0.88 | |
| | 5 | Low alloy steel | 100 | RPM | 6370 | 5310 | 3980 | 3180 | 2650 | 2270 | 1990 | 1770 | 1590 |
| | 6 | | | FEED | 0.16-0.21 | 0.2-0.26 | 0.26-0.34 | 0.34-0.42 | 0.41-0.47 | 0.47-0.54 | 0.47-0.55 | 0.5-0.59 | 0.54-0.67 |
| | 7 | | RPM | 5090 | 4240 | 3180 | 2550 | 2120 | 1820 | 1590 | 1410 | 1270 | |
| | 8 | | FEED | 0.16-0.21 | 0.2-0.26 | 0.26-0.34 | 0.34-0.42 | 0.41-0.47 | 0.47-0.54 | 0.47-0.55 | 0.5-0.59 | 0.54-0.67 | |
| | 9 | | RPM | 6370 | 5310 | 3980 | 3180 | 2650 | 2270 | 1990 | 1770 | 1590 | |
| | 10 | | FEED | 0.2-0.25 | 0.24-0.3 | 0.32-0.4 | 0.4-0.5 | 0.48-0.54 | 0.56-0.63 | 0.56-0.64 | 0.63-0.72 | 0.68-0.81 | |
| | 11 | | RPM | 5090 | 4240 | 3180 | 2550 | 2120 | 1820 | 1590 | 1410 | 1270 | |
| High alloyed steel, and tool steel | 40 | RPM | 2550 | 2120 | 1590 | 1270 | 1060 | 910 | 800 | 710 | 640 | | |
| | | FEED | 0.13-0.18 | 0.16-0.22 | 0.21-0.29 | 0.26-0.36 | 0.32-0.38 | 0.36-0.43 | 0.36-0.45 | 0.38-0.47 | 0.41-0.54 | | |
| M | 12 | Stainless steel | 40 | RPM | 2550 | 2120 | 1590 | 1270 | 1060 | 910 | 800 | 710 | 640 |
| | 13 | | | FEED | 0.13-0.18 | 0.16-0.22 | 0.21-0.29 | 0.26-0.36 | 0.32-0.38 | 0.36-0.43 | 0.36-0.45 | 0.38-0.47 | 0.41-0.54 |
| | 14 | | | | | | | | | | | | |
| K | 15 | Grey cast iron | 100 | RPM | 6370 | 5310 | 3980 | 3180 | 2650 | 2270 | 1990 | 1770 | 1590 |
| | 16 | | FEED | 0.23-0.30 | 0.27-0.36 | 0.36-0.48 | 0.45-0.60 | 0.54-0.72 | 0.63-0.84 | 0.64-0.80 | 0.72-0.90 | 0.80-0.98 | |
| | Nodular cast iron | 100 | RPM | 6370 | 5310 | 3980 | 3180 | 2650 | 2270 | 1990 | 1770 | 1590 | |
| | | | FEED | 0.20-0.25 | 0.24-0.30 | 0.32-0.40 | 0.40-0.50 | 0.48-0.60 | 0.56-0.70 | 0.56-0.72 | 0.63-0.81 | 0.70-0.90 | |
| | Malleable cast iron | 80 | RPM | 4460 | 3710 | 2790 | 2230 | 1860 | 1590 | 1390 | 1240 | 1110 | |
| | | | FEED | 0.20-0.25 | 0.24-0.30 | 0.32-0.40 | 0.40-0.50 | 0.48-0.60 | 0.56-0.70 | 0.56-0.72 | 0.63-0.81 | 0.70-0.90 | |
| 70 | RPM | 5090 | 4240 | 3180 | 2550 | 2120 | 1820 | 1590 | 1410 | 1270 | | | |
| FEED | 0.23-0.30 | 0.27-0.36 | 0.36-0.48 | 0.45-0.60 | 0.54-0.72 | 0.63-0.84 | 0.64-0.80 | 0.72-0.90 | 0.80-0.98 | | | | |
| 70 | RPM | 4460 | 3710 | 2790 | 2230 | 1860 | 1590 | 1390 | 1240 | 1110 | | | |
| FEED | 0.20-0.25 | 0.24-0.30 | 0.32-0.40 | 0.40-0.50 | 0.48-0.60 | 0.56-0.70 | 0.56-0.72 | 0.63-0.81 | 0.70-0.90 | | | | |
| N | 21 | Aluminum-wrought alloy | | RPM | | | | | | | | | |
| | 22 | | | FEED | | | | | | | | | |
| | Aluminum-cast, alloyed | | | RPM | | | | | | | | | |
| | | | | 24 | FEED | | | | | | | | |
| | | | | 25 | | | | | | | | | |
| | Copper and Copper Alloys (Bronze / Brass) | | | RPM | | | | | | | | | |
| | | | | 27 | FEED | | | | | | | | |
| | | | | 28 | | | | | | | | | |
| | Non Metallic Materials | | | RPM | | | | | | | | | |
| | | | | 29 | FEED | | | | | | | | |
| 30 | | | | | | | | | | | | | |
| S | 31 | Heat Resistant Super Alloys | | RPM | | | | | | | | | |
| | 32 | | | FEED | | | | | | | | | |
| | 33 | | | | | | | | | | | | |
| | 34 | | | | | | | | | | | | |
| | Titanium Alloys | | | RPM | | | | | | | | | |
| | | | | 36 | FEED | | | | | | | | |
| | | | | 37 | | | | | | | | | |
| H | 38 | Hardened steel | | RPM | | | | | | | | | |
| | 39 | | | FEED | | | | | | | | | |
| | 40 | Chilled Cast Iron | | | | | | | | | | | |
| | 41 | Hardened Cast Iron | | | | | | | | | | | |

SELECTION GUIDE



SERIES

DGR493

DGR495

DRILLING DEPTH

3XD

5XD

LENGTH

SHORT

LONG

SIZE MIN

D5.0

D5.0

SIZE MAX

D20.0

D20.0

PAGE

101


103

SURFACE TREATMENT

H-Coating

**SOLID CARBIDE
DREAM DRILLS
HIGH FEED**

1.5 to 2 Times Faster Feeding Speed than 2-Flute Drill
for Carbon Steels, Alloy Steels(up to HRc35) and Cast Iron

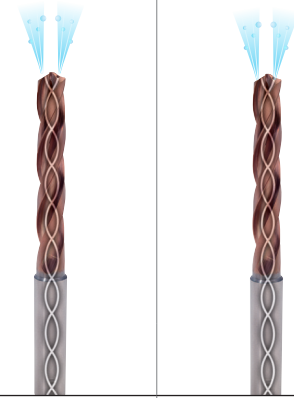

Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.105

| ISO | VDI 3323 | Material Description | Composition / Structure / Heat Treatment | HB | HRc | | | |
|-----|----------|-----------------------------|--|-----------------------|-----|----|---|---|
| P | 1 | Non-alloy steel | About 0.15% C Annealed | 125 | | | | |
| | 2 | | About 0.45% C Annealed | 190 | 13 | ◎ | ◎ | |
| | 3 | | About 0.45% C Quenched & Tempered | 250 | 25 | ◎ | ◎ | |
| | 4 | | About 0.75% C Annealed | 270 | 28 | ◎ | ◎ | |
| | 5 | | About 0.75% C Quenched & Tempered | 300 | 32 | ○ | ○ | |
| | 6 | Low alloy steel | Annealed | 180 | 10 | ◎ | ◎ | |
| | 7 | | Quenched & Tempered | 275 | 29 | ◎ | ◎ | |
| | 8 | | Quenched & Tempered | 300 | 32 | ○ | ○ | |
| | 9 | | Quenched & Tempered | 350 | 38 | ○ | ○ | |
| | 10 | | High alloyed steel, and tool steel | Annealed | 200 | 15 | ◎ | ◎ |
| | 11 | | | Quenched & Tempered | 325 | 35 | ○ | ○ |
| M | 12 | Stainless steel | Ferritic / Martensitic Annealed | 200 | 15 | | | |
| | 13 | | Martensitic Quenched & Tempered | 240 | 23 | | | |
| | 14 | | Austenitic | 180 | 10 | | | |
| K | 15 | Grey cast iron | Pearlitic / ferritic | 180 | 10 | ◎ | ◎ | |
| | 16 | | Pearlitic (Martensitic) | 260 | 26 | ○ | ○ | |
| | 17 | Nodular cast iron | Ferritic | 160 | 3 | ◎ | ◎ | |
| | 18 | | Pearlitic | 250 | 25 | ○ | ○ | |
| | 19 | Malleable cast iron | Ferritic | 130 | | ◎ | ◎ | |
| | 20 | | Pearlitic | 230 | 21 | ○ | ○ | |
| N | 21 | Aluminum-wrought alloy | Not Curable | 60 | | | | |
| | 22 | | Curable Hardened | 100 | | | | |
| | 23 | Aluminum-cast, alloyed | ≤ 12% Si, Not Curable | 75 | | | | |
| | 24 | | ≤ 12% Si, Curable Hardened | 90 | | | | |
| | 25 | | > 12% Si, Not Curable | 130 | | | | |
| | 26 | | Copper and Copper Alloys | Cutting Alloys, PB>1% | 110 | | | |
| | 27 | (Bronze / Brass) | CuZn, CuSnZn (Brass) | 90 | | | | |
| | 28 | | CuSn, lead-free copper and electrolytic copper | 100 | | | | |
| | 29 | Non Metallic Materials | Duroplastic, Fiber Reinforced Plastic | | | | | |
| | 30 | | Rubber, Wood, etc. | | | | | |
| S | 31 | Heat Resistant Super Alloys | Fe Based Annealed | 200 | 15 | | | |
| | 32 | | Cured | 280 | 30 | | | |
| | 33 | | Annealed | 250 | 25 | | | |
| | 34 | | Ni or Co Based | Cured | 350 | 38 | | |
| | 35 | | | Cast | 320 | 34 | | |
| | 36 | Titanium Alloys | Pure Titanium | 400 Rm | | | | |
| | 37 | | Alpha + Beta Alloys Hardened | 1050 Rm | | | | |
| H | 38 | Hardened steel | Hardened | 550 | 55 | | | |
| | 39 | | Hardened | 630 | 60 | | | |
| | 40 | Chilled Cast Iron | Cast | 400 | 42 | | | |
| | 41 | Hardened Cast Iron | Hardened | 550 | 55 | | | |