

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES

LONG

● VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL

LANG

● Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série longue


LONGUE

● PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione)

LUNGA

- ▶ Special flute shape and geometry suitable for machining stainless steel
- ▶ Excellent chip evacuation from better surface treatment
- ▶ Point R-thinning achieves superior centering and chip curling
- ▶ TiAlN coating for better surface finishes and longer tool life

- ▶ Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
- ▶ Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
- ▶ Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
- ▶ TiAlN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit

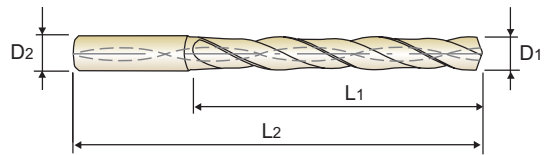

DIN 6537
CARBIDE
30°
h6
m7
140°
20 bar

P.129-130

5 × D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH452010	1.0	3	8	55
DH452011	1.1	3	12	55
DH452012	1.2	3	12	55
DH452013	1.3	3	12	55
DH452014	1.4	3	12	55
DH452015	1.5	3	16	55
DH452016	1.6	3	16	55
DH452017	1.7	3	16	55
DH452018	1.8	3	16	55
DH452019	1.9	3	16	55
DH452020	2.0	4	21	57
DH452021	2.1	4	21	57
DH452022	2.2	4	21	57
DH452023	2.3	4	21	57
DH452024	2.4	4	21	57
DH452025	2.5	4	21	57
DH452026	2.6	4	21	57
DH452027	2.7	4	21	57
DH452028	2.8	4	21	57
DH452029	2.9	4	21	57
DH452030	3.0	6	28	66
DH452031	3.1	6	28	66

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
TiAlN	D1	D2	L1	L2
DH452032	3.2	6	28	66
DH452033	3.3	6	28	66
DH452034	3.4	6	28	66
DH452035	3.5	6	28	66
DH452036	3.6	6	28	66
DH452037	3.7	6	28	66
DH452038	3.8	6	36	74
DH452039	3.9	6	36	74
DH452040	4.0	6	36	74
DH452041	4.1	6	36	74
DH452042	4.2	6	36	74
DH452043	4.3	6	36	74
DH452044	4.4	6	36	74
DH452045	4.5	6	36	74
DH452046	4.6	6	36	74
DH452047	4.7	6	36	74
DH452048	4.8	6	44	82
DH452049	4.9	6	44	82
DH452050	5.0	6	44	82
DH452051	5.1	6	44	82
DH452052	5.2	6	44	82
DH452053	5.3	6	44	82

▶ Other shank types are available on your request.

▶ NEXT PAGE


◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	○		◎	○				◎	◎	◎									
ISO	N								S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○												○				

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES **LONG**

- VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL **LANG**
- Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série longue **LONGUE**
- PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione) **LUNGA**

- ▶ Special flute shape and geometry suitable for machining stainless steel
 - ▶ Excellent chip evacuation from better surface treatment
 - ▶ Point R-thinning achieves superior centering and chip curling
 - ▶ TiAIN coating for better surface finishes and longer tool life
- ▶ Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
 - ▶ Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
 - ▶ Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
 - ▶ TiAIN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit

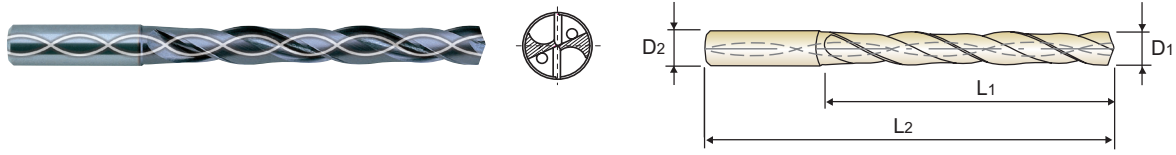

DIN 6537
CARBIDE
30°
h6
m7
140°
20 bar
5 x D
P.129-130

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
TiAIN				
DH452054	5.4	6	44	82
DH452055	5.5	6	44	82
DH452056	5.6	6	44	82
DH452057	5.7	6	44	82
DH452058	5.8	6	44	82
DH452059	5.9	6	44	82
DH452060	6.0	6	44	82
DH452061	6.1	8	53	91
DH452062	6.2	8	53	91
DH452063	6.3	8	53	91
DH452064	6.4	8	53	91
DH452065	6.5	8	53	91
DH452066	6.6	8	53	91
DH452067	6.7	8	53	91
DH452068	6.8	8	53	91
DH452069	6.9	8	53	91
DH452070	7.0	8	53	91
DH452071	7.1	8	53	91
DH452072	7.2	8	53	91
DH452073	7.3	8	53	91
DH452074	7.4	8	53	91
DH452075	7.5	8	53	91

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
TiAIN				
DH452076	7.6	8	53	91
DH452077	7.7	8	53	91
DH452078	7.8	8	53	91
DH452079	7.9	8	53	91
DH452080	8.0	8	53	91
DH452081	8.1	10	61	103
DH452082	8.2	10	61	103
DH452083	8.3	10	61	103
DH452084	8.4	10	61	103
DH452085	8.5	10	61	103
DH452086	8.6	10	61	103
DH452087	8.7	10	61	103
DH452088	8.8	10	61	103
DH452089	8.9	10	61	103
DH452090	9.0	10	61	103
DH452091	9.1	10	61	103
DH452092	9.2	10	61	103
DH452093	9.3	10	61	103
DH452094	9.4	10	61	103
DH452095	9.5	10	61	103
DH452096	9.6	10	61	103
DH452097	9.7	10	61	103

▶ Other shank types are available on your request. ▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323																				
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	○	○	○	◎	○	○	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

CARBIDE, DREAM DRILLS - INOX with COOLANT HOLES

LONG

● VOLLHARTMETALL DREAM SPIRALBOHRER - INOX mit KÜHLKANAL

LANG

● Forets DREAM DRILLS carbure pour INOX, avec arrosage central, série longue


LONGUE

● PUNTE ELICOIDALI IN MD, DREAM DRILLS - INOX (con fori di refrigerazione)

LUNGA

- Special flute shape and geometry suitable for machining stainless steel
- Excellent chip evacuation from better surface treatment
- Point R-thinning achieves superior centering and chip curling
- TiAlN coating for better surface finishes and longer tool life

- Spezielle Nutenform und Geometrie für die Bearbeitung von rostfreiem Stahl
- Hervorragende Spanabfuhr durch bessere Oberflächenbehandlung
- Vorzügliche Zentrierung und Spanbruch durch die R-Ausspitzung
- TiAlN-Beschichtung für bessere Oberflächengüte der Bohrung und längere Standzeit

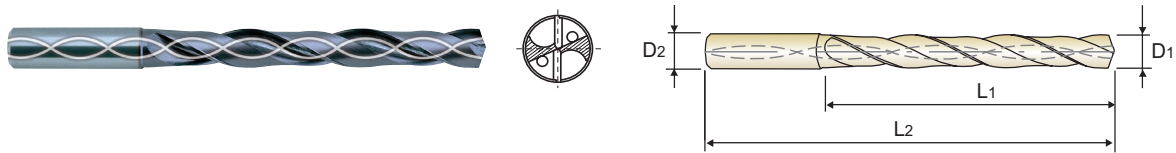

P.129-130

5 x D

Unit : mm

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
TiAlN				
DH452098	9.8	10	61	103
DH452099	9.9	10	61	103
DH452100	10.0	10	61	103
DH452101	10.1	12	71	118
DH452102	10.2	12	71	118
DH452103	10.3	12	71	118
DH452104	10.4	12	71	118
DH452105	10.5	12	71	118
DH452106	10.6	12	71	118
DH452107	10.7	12	71	118
DH452108	10.8	12	71	118
DH452109	10.9	12	71	118
DH452110	11.0	12	71	118
DH452111	11.1	12	71	118
DH452112	11.2	12	71	118
DH452113	11.3	12	71	118
DH452114	11.4	12	71	118
DH452115	11.5	12	71	118
DH452116	11.6	12	71	118
DH452117	11.7	12	71	118

EDP No.	Drill Diameter	Shank Diameter	Flute Length	Overall Length
	D1	D2	L1	L2
TiAlN				
DH452118	11.8	12	71	118
DH452119	11.9	12	71	118
DH452120	12.0	12	71	118
DH452125	12.5	14	77	124
DH452130	13.0	14	77	124
DH452135	13.5	14	77	124
DH452140	14.0	14	77	124
DH452145	14.5	16	83	133
DH452150	15.0	16	83	133
DH452155	15.5	16	83	133
DH452160	16.0	16	83	133
DH452165	16.5	18	93	143
DH452170	17.0	18	93	143
DH452175	17.5	18	93	143
DH452180	18.0	18	93	143
DH452185	18.5	20	101	153
DH452190	19.0	20	101	153
DH452195	19.5	20	101	153
DH452200	20.0	20	101	153

► Other shank types are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended		◎	○			◎	○					◎	◎	◎							
ISO	N								S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎	○	○	○												○				



RECOMMENDED CUTTING CONDITIONS
EMPHOHLENE SCHNEIDPARAMETER

DH451, DH452, DH453 SERIES with COOLANT HOLES

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)		Vc (m/min)	Parameter	Drill Diameter (mm)			
					1.0	2.0			3.0	4.0	5.0	6.0
P	1	Non-alloy steel	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
	2			FEED	0.02-0.04	0.04-0.06		FEED	0.04-0.10	0.06-0.12	0.12-0.18	0.14-0.20
	3			RPM	22280	11140		RPM	10610	7960	6370	5310
	4			FEED	0.02-0.04	0.04-0.06		FEED	0.04-0.10	0.06-0.12	0.12-0.18	0.14-0.20
	5											
	6	Low alloy steel	70	RPM	22280	11140	100	RPM	10610	7960	6370	5310
	7			FEED	0.02-0.04	0.04-0.06		FEED	0.04-0.10	0.06-0.12	0.12-0.18	0.14-0.20
	8			RPM	15920	7960		RPM	7430	5570	4460	3710
	9			FEED	0.02-0.04	0.04-0.06		FEED	0.04-0.10	0.06-0.12	0.12-0.18	0.14-0.20
	10	High alloyed steel, and tool steel										
	11											
M	12	Stainless steel	40	RPM	12730	6370	50	RPM	5310	3980	3180	2650
	13			FEED	0.02-0.04	0.02-0.04		FEED	0.03-0.05	0.05-0.09	0.07-0.11	0.09-0.13
	14			RPM	7960	3980		RPM	4240	3180	2550	2120
K	15	Grey cast iron	45	RPM	14320	7160	60	RPM	6370	4770	3820	3180
	16			FEED	0.02-0.04	0.02-0.04		FEED	0.04-0.06	0.06-0.10	0.08-0.12	0.10-0.14
	17	Nodular cast iron										
	18											
	19		Malleable cast iron									
	20											
N	21	Aluminum-wrought alloy	130	RPM	41380	20690	180	RPM	19100	14320	11460	9550
	22			FEED	0.04-0.10	0.08-0.14		FEED	0.14-0.20	0.19-0.25	0.20-0.26	0.22-0.28
	23	Aluminum-cast, alloyed	110	RPM	41380	20690	180	RPM	19100	14320	11460	9550
	24			FEED	0.04-0.10	0.08-0.14		FEED	0.14-0.20	0.19-0.25	0.20-0.26	0.22-0.28
	25			RPM	35010	17510		RPM	16980	12730	10190	8490
	26			FEED	0.04-0.10	0.08-0.14		FEED	0.14-0.20	0.19-0.25	0.20-0.26	0.22-0.28
	27	Copper and Copper Alloys (Bronze / Brass)	110	RPM	35010	17510	160	RPM	16980	12730	10190	8490
	28			FEED	0.04-0.10	0.08-0.14		FEED	0.14-0.20	0.19-0.25	0.20-0.26	0.22-0.28
	29	Non Metallic Materials	90	RPM	28650	14320	130	RPM	13790	10350	8280	6900
	30			FEED	0.04-0.08	0.06-0.10		FEED	0.12-0.18	0.16-0.22	0.17-0.23	0.19-0.25
S	31	Heat Resistant Super Alloys										
	32											
	33											
	34											
	35	Titanium Alloys	25	RPM	7960	3980	40	RPM	4240	3180	2550	2120
	36			FEED	0.01-0.03	0.01-0.03		FEED	0.02-0.04	0.04-0.08	0.06-0.10	0.08-0.12
	37											
H	38	Hardened steel										
	39											
	40	Chilled Cast Iron										
	41	Hardened Cast Iron										

► Recommend to reduce the feed rate as following

► NEXT PAGE

Feed 100% : DH451(3xD), DH452(5xD) Feed 85% : DH453(8xD)



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

DH451, DH452, DH453 SERIES

with COOLANT HOLES

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)						
					8.0	10.0	12.0	14.0	16.0	18.0	20.0
P	1	Non-alloy steel									
	2		100	RPM	3980	3180	2650	2270	1990	1770	1590
	3		FEED	0.16-0.22	0.20-0.26	0.18-0.28	0.20-0.30	0.22-0.32	0.26-0.36	0.28-0.38	
	4		100	RPM	3980	3180	2650	2270	1990	1770	1590
	5										
	6	Low alloy steel	100	RPM	3980	3180	2650	2270	1990	1770	1590
	7		FEED	0.16-0.22	0.20-0.26	0.18-0.28	0.20-0.30	0.22-0.32	0.26-0.36	0.28-0.38	
	8		70	RPM	2790	2230	1860	1590	1390	1240	1110
	9		FEED	0.16-0.22	0.20-0.26	0.18-0.28	0.20-0.30	0.22-0.32	0.26-0.36	0.28-0.38	
	10	High alloyed steel, and tool steel									
	11										
M	12	Stainless steel	50	RPM	1990	1590	1330	1140	990	880	800
	13		FEED	0.09-0.13	0.10-0.15	0.11-0.16	0.12-0.17	0.13-0.18	0.14-0.19	0.15-0.20	
	14		40	RPM	1590	1270	1060	910	800	710	640
K	15	Grey cast iron	60	RPM	0.09-0.13	0.10-0.15	0.11-0.16	0.12-0.17	0.13-0.18	0.14-0.19	0.15-0.20
	16		FEED	0.10-0.14	0.11-0.16	0.12-0.17	0.13-0.18	0.14-0.19	0.15-0.20	0.16-0.21	
	17	Nodular cast iron									
	18										
	19	Malleable cast iron									
	20										
N	21	Aluminum-wrought alloy	180	RPM	7160	5730	4770	4090	3580	3180	2860
	22		FEED	0.24-0.30	0.29-0.35	0.29-0.35	0.30-0.40	0.30-0.40	0.33-0.43	0.35-0.45	
	23	Aluminum-cast, alloyed	160	RPM	7160	5730	4770	4090	3580	3180	2860
	24		FEED	0.24-0.30	0.29-0.35	0.29-0.35	0.30-0.40	0.30-0.40	0.33-0.43	0.35-0.45	
	25		160	RPM	6370	5090	4240	3640	3180	2830	2550
	26		FEED	0.24-0.30	0.29-0.35	0.29-0.35	0.30-0.40	0.30-0.40	0.33-0.43	0.35-0.45	
	27	Copper and Copper Alloys (Bronze / Brass)	130	RPM	6370	5090	4240	3640	3180	2830	2550
	28		FEED	0.24-0.30	0.29-0.35	0.29-0.35	0.30-0.40	0.30-0.40	0.33-0.43	0.35-0.45	
	29	Non Metallic Materials									
	30										
S	31	Heat Resistant Super Alloys									
	32										
	33										
	34										
	35	Titanium Alloys									
	36										
	37		40	RPM	1590	1270	1060	910	800	710	640
H	38	Hardened steel									
	39										
	40	Chilled Cast Iron									
	41	Hardened Cast Iron									

► Recommend to reduce the feed rate as following

Feed 100% : DH451(3xD), DH452(5xD) **Feed 85%** : DH453(8xD)

SELECTION GUIDE



SERIES


	DH451	DH452	DH453
DRILLING DEPTH	3XD	5XD	8XD
LENGTH	SHORT	LONG	EXTRA LONG
SIZE MIN	D3.0	D1.0	D3.0
SIZE MAX	D20.0	D20.0	D14.0
PAGE	121	124	127

SURFACE TREATMENT

TiAIN

SOLID CARBIDE DREAM DRILLS INOX

For Tough Materials like Stainless Steels, Nickel Alloys and Titanium

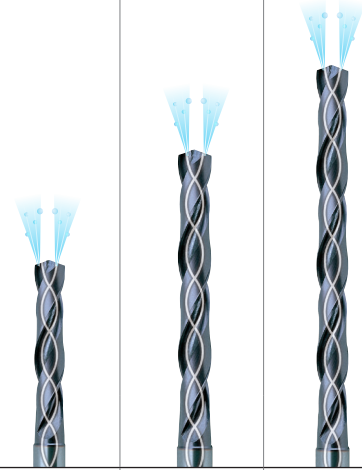

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.129

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125				
	2		About 0.45% C Annealed	190	13	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	○	○	○
	4		About 0.75% C Annealed	270	28			
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	◎	◎	◎
	7		Quenched & Tempered	275	29	○	○	○
	8		Quenched & Tempered	300	32			
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15		
	11	Quenched & Tempered		325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	◎	◎
	13		Martensitic Quenched & Tempered	240	23	◎	◎	◎
	14		Austenitic	180	10	◎	◎	◎
K	15	Grey cast iron	Pearlitic / ferritic	180	10			
	16		Pearlitic (Martensitic)	260	26			
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19	Malleable cast iron	Ferritic	130				
	20		Pearlitic	230	21			
N	21	Aluminum-wrought alloy	Not Curable	60		◎	◎	◎
	22		Curable Hardened	100		◎	◎	◎
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○
	24		≤ 12% Si, Curable Hardened	90		○	○	○
	25		> 12% Si, Not Curable	130		○	○	○
	26		Copper and Copper Alloys	Cutting Alloys, PB>1%	110			
	27	(Bronze / Brass)	CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic					
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Ni or Co Based Cured	350	38			
	35		Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm		○	○	○
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
41	Hardened Cast Iron	Hardened	550	55				