


HSS-E, 1 FLUTE for ALUMINIUM



- HSS-E, 1 SCHNEIDEN für ALUMINIUM
- Fraise HSS-E, 1 dent pour aluminium
- 1 TAGLIENTE - HSS-E

for ALUMINIUM
für ALUMINIUM



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
UNCOATED	js14	h6		
EL612030	3.0	8	12	60
EL612040	4.0	8	12	60
EL612050	5.0	8	12	60
EL612060	6.0	8	14	60
EL612070	7.0	8	14	60
EL612080	8.0	8	14	80
EL612090	9.0	8	14	80
EL612100	10.0	8	14	80

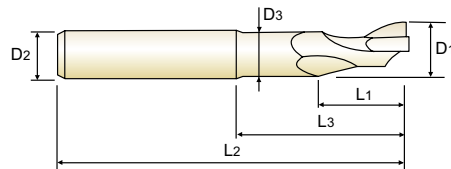

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
UNCOATED	D1(js14)	D2(h6)	L1	L3	L2	L2
EL612904	5.0	8	18	35	80	4.8
EL612909	5.0	8	40	-	100	-
EL612932	8.0	8	14	68	120	7.5

Tolerances according to DIN 7160 & 7161

Tolerance range in μm						
Nominal-Diameter in mm						
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js14	± 125	± 150	± 180	± 215	± 260	± 310
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	○	○				○				○											

ISO Material Description	N					S										H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	◎	◎	◎	◎	○																


EQ410, EQ429, EQ512 SERIES

MULTI FLUTE BALL NOSE TiAIN COATED

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.


ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1	Non-alloy steel	0.7D	0.3D	Vc	58	57	57	53	55	53	55
					fz	0.03	0.05	0.07	0.087	0.097	0.116	0.133
					RPM	3077	2268	1814	1406	1094	844	700
	2		0.7D	0.3D	Vc	45	43	44	41	43	44	43
					fz	0.026	0.044	0.06	0.068	0.082	0.086	0.088
					RPM	2387	1711	1401	1088	855	700	547
	3-4		0.7D	0.3D	Vc	26	25	25	25	25	25	24
					fz	0.024	0.035	0.052	0.056	0.073	0.088	0.094
					RPM	1379	995	796	663	497	398	306
	5		0.7D	0.3D	Vc	19	18	17	17	18	19	16
					fz	0.018	0.031	0.042	0.052	0.067	0.078	0.108
RPM		1008			716	541	451	358	302	204		
6	0.7D	0.3D	Vc	45	43	44	41	43	44	43		
			fz	0.026	0.044	0.06	0.068	0.082	0.086	0.088		
			RPM	2387	1711	1401	1088	855	700	547		
7	0.7D	0.3D	Vc	26	25	25	25	25	25	24		
			fz	0.024	0.035	0.052	0.056	0.073	0.088	0.094		
			RPM	1379	995	796	663	497	398	306		
8-9	0.7D	0.3D	Vc	19	18	17	17	18	19	16		
			fz	0.018	0.031	0.042	0.052	0.067	0.078	0.108		
			RPM	1008	716	541	451	358	302	204		
10	0.7D	0.3D	Vc	45	43	44	41	43	44	43		
			fz	0.026	0.044	0.06	0.068	0.082	0.086	0.088		
			RPM	2387	1711	1401	1088	855	700	547		
11.1	0.7D	0.3D	Vc	19	18	17	17	18	19	16		
			fz	0.018	0.031	0.042	0.052	0.067	0.078	0.108		
			RPM	1008	716	541	451	358	302	204		
N	21-22	Aluminum-wrought alloy	0.7D	0.3D	Vc	148	141	141	132	141	141	141
					fz	0.025	0.044	0.056	0.068	0.075	0.087	0.098
					RPM	7852	5610	4488	3501	2805	2244	1795
N	23-24	Aluminum-cast, alloyed	0.7D	0.3D	Vc	96	92	92	86	92	92	92
					fz	0.025	0.044	0.056	0.068	0.075	0.087	0.098
					RPM	5093	3661	2928	2281	1830	1464	1171

※The FEED, in long & extra long types, should be reduced by around 50%



EL612 EL623 SERIES 1 FLUTE - **SLOTING**

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						3.0	4.0	5.0	6.0	7.0	8.0	10.0
N	21-22	Aluminum-wrought alloy	1.0D	0.5D (~Ø:0.2D)	Vc	188	226	220	207	220	214	220
					fz	0.055	0.053	0.054	0.055	0.055	0.053	0.054
					RPM	19947	17985	14006	10982	10004	8515	7003
	23-24	Aluminum-cast, alloyed	1.0D	0.5D (~Ø:0.2D)	Vc	122	147	143	135	143	139	143
					fz	0.055	0.053	0.054	0.055	0.055	0.053	0.054
					RPM	12945	11698	9104	7162	6503	5531	4552



SELECTION GUIDE



MILLING TOOLS

HSS

SERIES	E9410	E9720	E3570	E3574
FLUTE	2	Muti Flute	2	4
HELIX ANGLE	≈ 30°	30°	≈ 30°	≈ 30°
CUTTING EDGE SHAPE	SQUARE	SQUARE	SQUARE	SQUARE
SIZE MIN	D3.0	D6.0	D2.5	D2.0
SIZE MAX	D25.0	D30.0	D18.0	D18.0
PAGE	678	679	680	681

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA

HSS GENERAL HSS END MILLS

General Purpose, Non-coated, Any Coating Available




Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 738

SHORT LENGTH	SHORT LENGTH ROUGHING	SHORT LENGTH	SHORT LENGTH
Uncoated / TiAIN	Uncoated / TiAIN	Uncoated / TiAIN	Uncoated
HSS-PM	HSS-PM	HSS-PM	HSS-PM

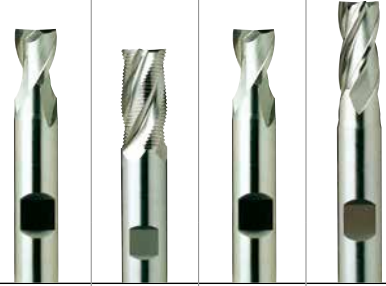

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc					
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	◎	
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎	
	5		About 0.75% C Quenched & Tempered	300	32	○	○	○	○	
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	◎	
	7		Quenched & Tempered	275	29	◎	◎	◎	◎	
	8		Quenched & Tempered	300	32	○	○	○	○	
	9		Quenched & Tempered	350	38	○	○	○	○	
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎	◎
	11			Quenched & Tempered	325	35	○	○	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15					
	13		Martensitic Quenched & Tempered	240	23					
	14		Austenitic	180	10					
K	15	Grey cast iron	Pearlitic / ferritic	180	10					
	16		Pearlitic (Martensitic)	260	26					
	17	Nodular cast iron	Ferritic	160	3					
	18		Pearlitic	250	25					
	19		Ferritic	130						
20	Malleable cast iron	Pearlitic	230	21						
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○	○	
	22		Curable Hardened	100		○	○	○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	○	
	24		≤ 12% Si, Curable Hardened	90		○	○	○	○	
	25		> 12% Si, Not Curable	130		○	○	○	○	
	26		Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27	Non Metallic Materials	CuZn, CuSnZn (Brass)	90						
	28		CuSn, lead-free copper and electrolytic copper	100						
	29		Duroplastic, Fiber Reinforced Plastic							
	30	Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15					
	32		Cured	280	30					
	33		Annealed	250	25					
	34		Cured	350	38					
	35	Cast	320	34						
	36	Titanium Alloys	Pure Titanium	400 Rm						
	37		Alpha + Beta Alloys Hardened	1050 Rm						
H	38	Hardened steel	Hardened	550	55					
	39		Hardened	630	60					
	40	Chilled Cast Iron	Cast	400	42					
	41	Hardened Cast Iron	Hardened	550	55					

