


**CARBIDE, 3 FLUTE SHORT LENGTH**

- VOLLHARTMETALL, 3 SCHNEIDEN KURZ
- Fraise carbure, 3 dents, courte
- 3 TAGLIENTI, SERIE CORTA

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design possesses the advantage of 2 flute and 4 flute end mill.
- ▶ Für die Trockenbearbeitung.
- ▶ Hervorragendes Preis - Leistungsverhältnis.
- ▶ 3 Schneiden verbinden die Vorteile von 2 - und 4 - schneidigen Schafffräsern.



CARBIDE 3 30° DIN 6535HA P.606-607

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9425010	1.0	4	3	40
G9425015	1.5	4	4.5	40
G9425020	2.0	2	8	32
G9425025	2.5	3	8	32
G9425030	3.0	3	12	32
G9425035	3.5	4	12	32
G9425040	4.0	4	12	40
G9425045	4.5	5	14	50
G9425050	5.0	5	14	50
G9425055	5.5	6	16	50
G9425060	6.0	6	16	50
G9425070	7.0	7	20	60
G9425080	8.0	8	20	60
G9425090	9.0	9	20	60
G9425100	10.0	10	22	70
G9425120	12.0	12	22	70
G9425140	14.0	14	25	75
G9425160	16.0	16	25	75
G9425200	20.0	20	32	100

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron	Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



**K-2  
END MILLS**

**RECOMMENDED CUTTING CONDITIONS  
EMPFOHLENE SCHNEIDPARAMETER**


**G9553, G9G46, G9410, G9425, G9G47, G9439  
G9528, G9433, G9G48, G9447, G9G49** SERIES

**3 FLUTE - SLOTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)															
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0			
<b>P</b>	1-4	Non-alloy steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	45	60	50	55	65	70	70	70	70	70	75	75	70			
					fz	0.002	0.003	0.005	0.007	0.012	0.015	0.018	0.027	0.03	0.031	0.029	0.029	0.029			
	RPM		14324	12732	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114						
	FEED		86	115	119	123	186	201	201	226	201	173	148	130	97						
	5		1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45			
					fz	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024			
6-7	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	45	60	50	55	65	70	70	70	70	70	75	75	70					
			fz	0.002	0.003	0.005	0.007	0.012	0.015	0.018	0.027	0.03	0.031	0.029	0.029	0.029					
8-9	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45					
			fz	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024					
10	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	45	60	50	55	65	70	70	70	70	70	75	75	70					
			fz	0.002	0.003	0.005	0.007	0.012	0.015	0.018	0.027	0.03	0.031	0.029	0.029	0.029					
11.1 - 11.2	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45					
			fz	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024					
<b>M</b>	14.1	Stainless steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	20	25	25	30	35	35	35	35	35	35	35	35				
					fz	0.002	0.003	0.004	0.007	0.011	0.015	0.019	0.025	0.028	0.026	0.027	0.031	0.03			
<b>K</b>	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	1.0D	Vc	60	55	60	55	60	55	55	55	60	55	55	55				
					fz	0.003	0.005	0.007	0.011	0.013	0.018	0.026	0.036	0.046	0.063	0.073	0.086	0.115			
<b>N</b>	21~22	Aluminum-wrought alloy	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	145	140	145	145				
					fz	0.002	0.004	0.006	0.009	0.013	0.015	0.019	0.026	0.032	0.038	0.043	0.05	0.065			
<b>H</b>	40	Chilled Cast Iron	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	50	45				
					fz	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024			

※ The FEED, in long & extra long types, should be reduced by around 50%



# RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER


## G9553, G9G46, G9410, G9425, G9G47, G9439 G9528, G9433, G9G48, G9447, G9G49 SERIES

**3 FLUTE - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)															
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0			
P	1-4	Non-alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90			
					fz	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.047	0.048	0.047			
	RPM		17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432						
	FEED		105	175	172	201	363	390	430	451	381	337	289	272	202						
	Vc		30	35	40	45	50	50	55	55	55	55	55	60	55						
	fz		0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	0.037						
	RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875							
	FEED	57	89	115	129	227	229	271	249	200	162	139	136	97							
	5	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90				
				fz	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.047	0.048	0.047				
	6-7	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90				
				fz	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.047	0.048	0.047				
8-9	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	60	55						
			fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	0.037					
10	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90					
			fz	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.047	0.048	0.047					
11.1 - 11.2	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	60	55						
			fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	0.037					
M	14.1	Stainless steel	0.1D	1.0D	Vc	25	35	35	35	40	40	45	45	45	45	45	45				
					fz	0.002	0.004	0.006	0.009	0.018	0.024	0.03	0.042	0.045	0.045	0.044	0.048	0.048			
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.1D	1.5D	Vc	60	55	60	55	60	55	55	55	60	55	55	55				
					fz	0.008	0.013	0.017	0.026	0.035	0.044	0.064	0.093	0.115	0.154	0.181	0.22	0.285			
N	21~22	Aluminum-wrought alloy	0.1D	1.5D	Vc	140	130	140	145	140	145	145	145	145	140	145	145	140			
					fz	0.006	0.01	0.016	0.021	0.031	0.037	0.048	0.064	0.08	0.098	0.111	0.129	0.167			
	RPM		44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228						
	FEED		802	828	1070	969	1036	1025	1108	1108	1108	1092	1098	1116	1116						
	Vc		140	130	140	145	140	145	145	145	145	140	145	145	140						
	fz		0.006	0.01	0.016	0.021	0.031	0.037	0.048	0.064	0.08	0.098	0.111	0.129	0.167						
	23~25	0.1D	1.5D	Vc	140	130	140	145	140	145	145	145	145	140	145	145	140				
				fz	0.006	0.01	0.016	0.021	0.031	0.037	0.048	0.064	0.08	0.098	0.111	0.129	0.167				
	26-28	0.1D	1.5D	Vc	80	95	105	105	110	105	105	110	105	105	110	105					
				fz	0.006	0.011	0.016	0.023	0.029	0.037	0.048	0.063	0.081	0.096	0.115	0.125	0.162				
	29.1	0.1D	1.5D	Vc	80	95	105	105	110	105	105	110	105	105	110	105					
				fz	0.006	0.011	0.016	0.023	0.029	0.037	0.048	0.063	0.081	0.096	0.115	0.125	0.162				
H	40	Chilled Cast Iron	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	60	55				
					fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	0.037			
H	40	Chilled Cast Iron	0.1D	1.0D	Vc	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875			
					FEED	57	89	115	129	227	229	271	249	200	162	139	136	97			

※ The FEED, in long & extra long types, should be reduced by around 50%



HSS

CBN  
END MILLS

i-Xmill  
END MILLS

i-SMART  
MODULAR  
END MILLS

X5070  
END MILLS

4G MILL  
END MILLS

X-POWER  
PRO  
END MILLS

TitaNox-  
POWER  
END MILLS

JET-POWER  
END MILLS

V7 PLUS  
END MILLS

ALU-POWER  
HPC  
END MILLS

ALU-  
POWER  
END MILLS

D-POWER  
GRAPHITE  
END MILLS

D-POWER  
CFRP  
END MILLS

ROUTERS

CRX S  
END MILLS

K-2  
END MILLS

ONLY ONE  
COATED PM60  
END MILLS

TANK-  
POWER  
END MILLS

GENERAL  
HSS  
END MILLS

MILLING  
CUTTERS

TECHNICAL  
DATA

**SELECTION GUIDE**



SERIES	G9444	G9527	G9445	G9G45
FLUTE	2	2	2	2
HELIX ANGLE	≈ 30°	≈ 30°	≈ 30°	≈ 30°
CUTTING EDGE SHAPE	SQUARE	SQUARE	SQUARE	SQUARE
SIZE MIN	D2.0	D3.5	D2.0	D3.0
SIZE MAX	D20.0	D20.0	D20.0	D20.0
PAGE	566	567	568	570

**SOLID CARBIDE  
K-2  
END MILLS**

General Purpose with Coating  
Conventional or High Speed Milling, Wet or Dry Cutting

SHORT LENGTH	LONG LENGTH	LONG LENGTH	LONG LENGTH with CHAMFER
TiAlN based	TiAlN based	TiAlN based	TiAlN based




Please visit [globalyg1.com/mat](http://globalyg1.com/mat) for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 597

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc					
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	◎	
	2		About 0.45% C Annealed	190	13	◎	◎	◎	◎	
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎	◎	
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎	
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎	◎	
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	◎	
	7		Quenched & Tempered	275	29	◎	◎	◎	◎	
	8		Quenched & Tempered	300	32	◎	◎	◎	◎	
	9		Quenched & Tempered	350	38	◎	◎	◎	◎	
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎	◎
	11			Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	○	
	13		Martensitic Quenched & Tempered	240	23	○	○	○	○	
	14		Austenitic	180	10	○	○	○	○	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○	
	16		Pearlitic (Martensitic)	260	26	○	○	○	○	
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○	
	18		Pearlitic	250	25	○	○	○	○	
	19	Malleable cast iron	Ferritic	130		○	○	○	○	
	20		Pearlitic	230	21	○	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○	○	
	22		Curable Hardened	100		○	○	○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	○	
	24		≤ 12% Si, Curable Hardened	90		○	○	○	○	
	25		> 12% Si, Not Curable	130		○	○	○	○	
	26		Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	○	○
	27	Non Metallic Materials	CuZn, CuSnZn (Brass)	90		○	○	○	○	
	28		CuSn, lead-free copper and electrolytic copper	100		○	○	○	○	
	29		Duroplastic, Fiber Reinforced Plastic			○	○	○	○	
	30	Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	○	○	○	○	
	32		Fe Based Cured	280	30	○	○	○	○	
	33		Ni or Co Based Annealed	250	25	○	○	○	○	
	34		Ni or Co Based Cured	350	38	○	○	○	○	
	35	Titanium Alloys	Cast	320	34	○	○	○	○	
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○	○	
	37		Alpha + Beta Alloys Hardened	1050 Rm		○	○	○	○	
H	38	Hardened steel	Hardened	550	55					
	39		Hardened	630	60					
	40	Chilled Cast Iron	Cast	400	42	○	○	○	○	
	41	Hardened Cast Iron	Hardened	550	55					

G9452	G9B80	G9410 G9553	G9G46	G9425	G9G47	G9439	G9528	G9433	G9G48	G9447
2	2	3	3	3	3	3	3	3	3	3
30°	30°	30°	30°	30°	30°	≈ 30°	≈ 30°	≈ 30°	≈ 30°	45°
SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE
D3.0	D0.4	D0.5	D3.0	D1.0	D3.0	D2.0	D3.5	D3.0	D3.0	D3.0
D20.0	D4.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0
571	572	575	577	578	579	580	581	582	583	584
EXTRA LONG LENGTH	RIB PROCESSING	THROW AWAY	THROW AWAY with CHAMFER	SHORT LENGTH	SHORT LENGTH with CHAMFER	SHORT LENGTH	LONG LENGTH	LONG LENGTH	LONG LENGTH with CHAMFER	LONG LENGTH
TiAlN based	TiAlN based	TiAlN based	TiAlN based	TiAlN based	TiAlN based	TiAlN based	TiAlN based	TiAlN based	TiAlN based	TiAlN based

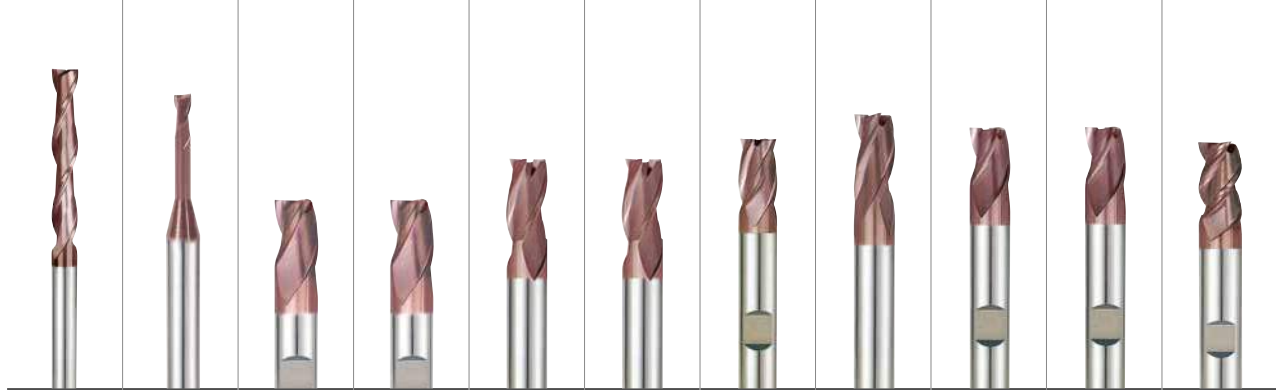

○	○	○	○	○	○	○	○	○	○	○	1
○	○	○	○	○	○	○	○	○	○	○	2
○	○	○	○	○	○	○	○	○	○	○	3
○	○	○	○	○	○	○	○	○	○	○	4
○	○	○	○	○	○	○	○	○	○	○	5
○	○	○	○	○	○	○	○	○	○	○	6 P
○	○	○	○	○	○	○	○	○	○	○	7
○	○	○	○	○	○	○	○	○	○	○	8
○	○	○	○	○	○	○	○	○	○	○	9
○	○	○	○	○	○	○	○	○	○	○	10
○	○	○	○	○	○	○	○	○	○	○	11
○	○	○	○	○	○	○	○	○	○	○	12
○	○	○	○	○	○	○	○	○	○	○	13 M
○	○	○	○	○	○	○	○	○	○	○	14
○	○	○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	○	○	17 K
○	○	○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	○	○	20
○	○	○	○	○	○	○	○	○	○	○	21
○	○	○	○	○	○	○	○	○	○	○	22
○	○	○	○	○	○	○	○	○	○	○	23
○	○	○	○	○	○	○	○	○	○	○	24
○	○	○	○	○	○	○	○	○	○	○	25 N
○	○	○	○	○	○	○	○	○	○	○	26
○	○	○	○	○	○	○	○	○	○	○	27
○	○	○	○	○	○	○	○	○	○	○	28
○	○	○	○	○	○	○	○	○	○	○	29
○	○	○	○	○	○	○	○	○	○	○	30
○	○	○	○	○	○	○	○	○	○	○	31
○	○	○	○	○	○	○	○	○	○	○	32
○	○	○	○	○	○	○	○	○	○	○	33
○	○	○	○	○	○	○	○	○	○	○	34 S
○	○	○	○	○	○	○	○	○	○	○	35
○	○	○	○	○	○	○	○	○	○	○	36
○	○	○	○	○	○	○	○	○	○	○	37
○	○	○	○	○	○	○	○	○	○	○	38
○	○	○	○	○	○	○	○	○	○	○	39
○	○	○	○	○	○	○	○	○	○	○	40 H
○	○	○	○	○	○	○	○	○	○	○	41

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA