YG MILLING CUTTERS

FLAT SHANK **E2498** SERIES

HSS Co8, 4 FLUTE CORNER ROUNDING CUTTERS

HSS Co8, 4 SCHNEIDEN VIERTELKREISFRÄSER
FRAISE HSS Co8, 1/4 DE CERCLE, 4 DENTS
4 TAGLIENTI PER RAGGIATURA DI SPIGOLI

▶ These tools can be adapted for many screw machine applications as end formming tools to form a specific radius.

▶ Dieses Werkzeug kann an vielen Scrow maschine als Finishingtool für spezielle Radien montiert werden.



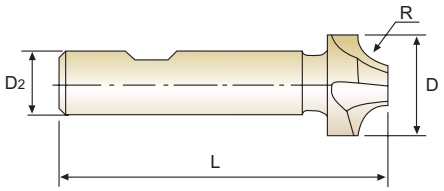

HSS Co8 | DIN 6518 | N | 4 | 0° | DIN 1835B | UNCOATED p.C800

Unit : mm

EDP No.	Radius	Outside Diameter	Shank Diameter	Overall Length
	R(H11)	D	D2(h6)	L
E2498010	R1.0	8.0	10	60
E2498015	R1.5	9.0	10	60
E2498020	R2.0	10.0	10	60
E2498025	R2.5	11.0	10	60
E2498030	R3.0	12.0	12	60
E2498035	R3.5	13.0	12	60
E2498040	R4.0	14.0	12	60
E2498045	R4.5	15.0	12	60
E2498050	R5.0	16.0	12	60
E2498055	R5.5	19.0	16	67
E2498060	R6.0	20.0	16	67
E2498065	R6.5	21.0	16	71
E2498070	R7.0	22.0	16	71
E2498075	R7.5	23.0	16	71
E2498080	R8.0	24.0	16	71
E2498085	R8.5	25.0	25	85
E2498090	R9.0	26.0	25	85
E2498095	R9.5	27.0	25	85

▶ TiN-COATING, TiCN-COATING & TiAlN-COATING is available on your request.

▶ NEXT PAGE

Tolerances according to DIN 7160 & 7161

Nominal-Diameter in ㎜						
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
Tolerance range in ㎛						
H11	+ 60 0	+ 75 0	+ 90 0	+ 110 0	+ 130 0	+ 160 0
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13	0 - 16

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	○	◎	◎	○	○	◎	○									

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○																

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions
YG-1 CO., LTD.

HSS Co8, 4 FLUTE CORNER ROUNDING CUTTERS

HSS Co8, 4 SCHNEIDEN VIERTELKREISFRÄSER
FRAISE HSS Co8, 1/4 DE CERCLE, 4 DENTS
4 TAGLIENTI PER RAGGIATURA DI SPIGOLI

▶ These tools can be adapted for many screw machine applications as end formming tools to form a specific radius.

▶ Dieses Werkzeug kann an vielen Scrow maschine als Finishingtool für spezielle Radien montiert werden.



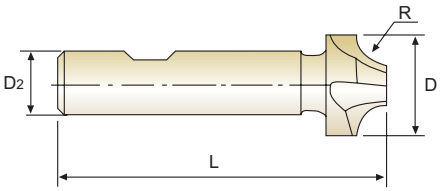

HSS Co8 | DIN 6518 | N | 4 | 0° | DIN 1835B | UNCOATED p.C800

Unit : mm

EDP No.	Radius	Outside Diameter	Shank Diameter	Overall Length
	R(H11)	D	D2(h6)	L
E2498100	R10.0	**28.0**	25	85
E2498105	R10.5	**31.0**	25	90
E2498110	R11.0	**32.0**	25	90
E2498120	R12.0	**34.0**	25	90
E2498125	R12.5	**41.0**	25	100
E2498130	R13.0	**42.0**	25	100
E2498140	R14.0	**44.0**	25	100
E2498150	R15.0	**46.0**	25	100
E2498160	R16.0	**48.0**	25	100
E2498180	R18.0	**52.0**	32	112
E2498200	R20.0	**56.0**	32	112

▶ TiN-COATING, TiCN-COATING & TiAlN-COATING is available on your request.

Tolerances according to DIN 7160 & 7161

Nominal-Diameter in mm						
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
Tolerance range in μm						
H11	+ 60 0	+ 75 0	+ 90 0	+ 110 0	+ 130 0	+ 160 0
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13	0 - 16

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	○	◎	◎	○	○	◎	○									

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○																

MILLING CUTTERS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

E2498 SERIES

4 FLUTE CORNER ROUNDING CUTTERS

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)											
				8.0	9.0	10.0	11.0	12.0	14.0	16.0	20.0	24.0	28.0	34.0	48.0
P	1	Non-alloy steel	Vc	20	20	20	20	20	20	20	20	20	20	20	20
			fz	0.017	0.022	0.02	0.021	0.021	0.025	0.029	0.032	0.038	0.042	0.049	0.058
			RPM	796	707	637	579	531	455	398	318	265	227	187	133
			FEED	54	62	51	49	45	45	46	41	40	38	37	31
	2		Vc	15	15	15	15	15	15	15	15	15	15	15	15
			fz	0.015	0.016	0.016	0.019	0.019	0.023	0.029	0.033	0.039	0.04	0.048	0.053
			RPM	597	531	477	434	398	341	298	239	199	171	140	99
			FEED	36	34	31	33	30	31	35	32	31	27	27	21
	3-4		Vc	10	10	10	10	10	10	10	10	10	10	10	10
			fz	0.018	0.023	0.02	0.024	0.024	0.023	0.03	0.034	0.04	0.05	0.048	0.05
			RPM	398	354	318	289	265	227	199	159	133	114	94	66
			FEED	29	33	25	28	25	21	24	22	21	23	18	13
	6	Low alloy steel	Vc	15	15	15	15	15	15	15	15	15	15	15	15
			fz	0.015	0.016	0.016	0.019	0.019	0.023	0.029	0.033	0.039	0.04	0.048	0.053
			RPM	597	531	477	434	398	341	298	239	199	171	140	99
			FEED	36	34	31	33	30	31	35	32	31	27	27	21
	7-8		Vc	10	10	10	10	10	10	10	10	10	10	10	10
			fz	0.018	0.023	0.02	0.024	0.024	0.023	0.03	0.034	0.04	0.05	0.048	0.05
			RPM	398	354	318	289	265	227	199	159	133	114	94	66
			FEED	29	33	25	28	25	21	24	22	21	23	18	13
	10	High alloyed steel, and tool steel	Vc	15	15	15	15	15	15	15	15	15	15	15	15
			fz	0.015	0.016	0.016	0.019	0.019	0.023	0.029	0.033	0.039	0.04	0.048	0.053
			RPM	597	531	477	434	398	341	298	239	199	171	140	99
			FEED	36	34	31	33	30	31	35	32	31	27	27	21
	11.1		Vc	10	10	10	10	10	10	10	10	10	10	10	10
			fz	0.018	0.023	0.02	0.024	0.024	0.023	0.03	0.034	0.04	0.05	0.048	0.05
			RPM	398	354	318	289	265	227	199	159	133	114	94	66
			FEED	29	33	25	28	25	21	24	22	21	23	18	13
N	21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	Vc	90	80	90	85	90	90	80	90	90	85	85	90
			fz	0.018	0.021	0.02	0.023	0.022	0.025	0.031	0.034	0.038	0.045	0.05	0.058
			RPM	3581	2829	2865	2460	2387	2046	1592	1432	1194	966	796	597
			FEED	258	238	229	226	210	205	197	195	181	174	159	138

SELECTION GUIDE

YG MILLING TOOLS

HSS MILLING CUTTERS

General Works. Available Dovetail, Woodruff Keyseat, T-slot, Side Milling Cutters and HSS (8% cobalt) Corner Rounding, Shell End Mills

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p.C792

SERIES	ML012, ML022 ML112, ML122	ML032, ML042 ML132, ML142	ML062 ML162
CUTTING EDGE SHAPE	DOVETAIL CUTTERS	DOVETAIL CUTTERS	WOODRUFF KEYSEAT CUTTERS
FLUTE	Multi Flute	Multi Flute	Multi Flute
HELIX ANGLE	0°	0°	10°~12°
SIZE MIN	D16.0	D16.0	D10.5
SIZE MAX	D50.0	D38.0	D45.5
PAGE	C772	C773	C774
	Type A, C, E	Type B, D, F	Type B, D, F
	Uncoated	Uncoated	Uncoated
	HSS-E	HSS-E	HSS-E
			

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc			
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎	◎
	2		About 0.45% C	Annealed	190	13	◎	◎	◎
	3		About 0.45% C	Quenched & Tempered	250	25	◎	◎	◎
	4		About 0.75% C	Annealed	270	28	◎	◎	◎
	5		About 0.75% C	Quenched & Tempered	300	32	◎	◎	◎
	6	Low alloy steel		Annealed	180	10	◎	◎	◎
	7			Quenched & Tempered	275	29	◎	◎	◎
	8			Quenched & Tempered	300	32	◎	◎	◎
	9			Quenched & Tempered	350	38	○	○	○
	10	High alloyed steel, and tool steel		Annealed	200	15	◎	◎	◎
	11			Quenched & Tempered	325	35	○	○	○
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15			
	13		Martensitic	Quenched & Tempered	240	23			
	14		Austenitic		180	10			
K	15	Grey cast iron	Pearlitic / ferritic		180	10			
	16		Pearlitic (Martensitic)		260	26			
	17	Nodular cast iron	Ferritic		160	3			
	18		Pearlitic		250	25			
	19	Malleable cast iron	Ferritic		130				
	20		Pearlitic		230	21			
N	21	Aluminum-wrought alloy	Not Curable		60		○	○	○
	22		Curable	Hardened	100		○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		○	○	○
	24		≤ 12% Si, Curable	Hardened	90		○	○	○
	25		> 12% Si, Not Curable		130		○	○	○
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110				
	27		CuZn, CuSnZn (Brass)		90				
	28		CuSn, lead-free copper and electrolytic copper		100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium		400 Rm				
	37		Alpha + Beta Alloys	Hardened	1050 Rm				
H	38	Hardened steel		Hardened	550	55			
	39			Hardened	630	60			
	40	Chilled Cast Iron		Cast	400	42			
	41	Hardened Cast Iron		Hardened	550	55			

ML072 ML172	ML092	ML102	E2675	E2676	E2677	E2678	E2679	E2498	
T-SLOT CUTTERS	SIDE AND FACE MILLING CUTTERS	SIDE AND FACE MILLING CUTTERS	SHELL END MILL	SHELL END MILL	ROUGHING SHELL END MILL	ROUGHING SHELL END MILL	ROUGHING & FINISHING SHELL END MILL	CORNER ROUNDING CUTTERS	
Multi Flute	Multi Flute	Multi Flute	Multi Flute	Multi Flute	Multi Flute	Multi Flute	Multi Flute	4	
10°~20°	-	-	30°	42°	30°	30°	30°	0°	
D12.5	D50.0	D50.0	D30.0	D30.0	D40.0	D40.0	D40.0	D8.0	
D40.0	D125.0	D200.0	D160.0	D100.0	D160.0	D160.0	D160.0	D56.0	
C776	C777	C779	C785	C786	C787	C788	C789	C790	
Type AA, AB, AD	with STRAIGHT TEETH	with STAGGERED TEETH	-	for ALUMINUM	-	-	-	-	
Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	
HSS-E	HSS-E	HSS-E	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	
									
◎	◎	◎	◎	○	◎	◎	◎	◎	1
◎	◎	◎	◎	○	◎	◎	◎	◎	2
◎	◎	◎	◎	○	◎	◎	◎	◎	3
◎	◎	◎	◎	○	◎	◎	◎	◎	4
◎	◎	◎	◎		○	○	○	○	5
◎	◎	◎	◎	○	◎	◎	◎	◎	6 P
◎	◎	◎	◎	○	◎	◎	◎	◎	7
◎	◎	◎	◎		○	○	○	○	8
	○	○	○		○	○	○	○	9
◎	◎	◎	◎	○	◎	◎	◎	◎	10
	○	○	○		○	○	○	○	11
									12
									13 M
									14
									15
									16
									17
									18 K
									19
									20
○	○	○		◎	○	○	○	○	21
○	○	○		◎	○	○	○	○	22
○	○	○		◎	○	○	○	○	23
○	○	○		◎	○	○	○	○	24
○	○	○		◎	○	○	○	○	25 N
									26
									27
									28
									29
									30
									31
									32
									33
									34 S
									35
									36
									37
									38
									39
									40 H
									41