



PLAIN SHANK


ML072 SERIES

FLAT SHANK

ML172 SERIES

HSS-E, T-SLOT CUTTERS TYPE “AA”, “AB”, “AD”

- HSS-E, SCHAFTERFRÄSER FÜR T-NUTEN FORM “AA”, “AB”, “AD”
- Fraise HSS-E pour rainure en "T" Type "AA", "AB", "AD"
- FRESE PER SCANALATURE A T - DENTI ALTERNATI

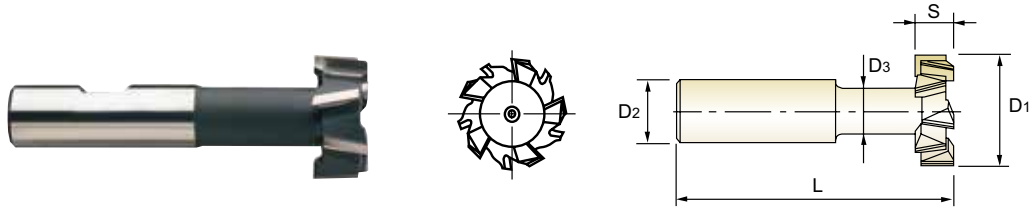

HSS-E

DIN 851

N

10°

DIN 1835A

DIN 1835B


UNCOATED

p.C729

EDP No.		Cutter Diameter	Width of Face	Shank Diameter	Neck Diameter	Overall Length	No. of Teeth
PLAIN	FLAT	D1(d11)	S(d11)	D2(h6)	D3(h12)	L(js18)	Z
ML07212E01	ML17212E01	12.5	6	10	5	57	6
ML07201601	ML17201601	16.0	8	10	6.5	62	6
ML07201801	ML17201801	18.0	8	12	8	70	6
ML07201901	ML17201901	19.0	9	12	8	71	6
ML07202101	ML17202101	21.0	9	12	10	74	6
ML07202201	ML17202201	22.0	10	12	10	75	6
ML07202501	ML17202501	25.0	11	16	12	82	6
ML07202801	ML17202801	28.0	12	16	13	83	6
ML07203201	ML17203201	32.0	14	16	15	90	8
ML07203601	ML17203601	36.0	16	25	17	103	8
ML07204001	ML17204001	40.0	18	25	19	108	8

Tolerances according to DIN 7160 & 7161

Nominal-Diameter in mm						
	over3 to 6	over6 to 10	over10 to 18	over18 to 30	over30 to 50	over50 to 80
Tolerance range in mm						
h12	0 -0.12	0 -0.15	0 -0.18	0 -0.21	0 -0.25	0 -0.30
js18	±0.90	±1.10	±1.35	±1.65	±1.95	±2.30
Tolerance range in µm						
d11	-30 -105	-40 -130	-50 -160	-65 -195	-80 -240	-100 -290
h6	0 -8	0 -9	0 -11	0 -13	0 -16	0 -19



◎ : Excellent ○ : Good

ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎		◎											
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○																

SELECTION GUIDE



MILLING TOOLS

HSS

CBN
END MILLS

i-Xmill
END MILLS

i-SMART
MODULAR
END MILLS

X5070
END MILLS

4G MILL
END MILLS

X-POWER
PRO
END MILLS

TitaNox-
POWER
END MILLS

JET-POWER
END MILLS

V7 PLUS
END MILLS

ALU-POWER
HPC
END MILLS

ALU-
POWER
END MILLS

D-POWER
GRAPHITE
END MILLS

CRX S
END MILLS

K-2
END MILLS

ONLY ONE
COATED PM60
END MILLS

TANK-
POWER
END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA

HSS
MILLING
CUTTERS

General Works. Available Dovetail, Woodruff Keyseat, T-slot, Side Milling Cutters and HSS (8% cobalt) Corner Rounding, Shell End Mills



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p. C726

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc			
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎	◎
	2		About 0.45% C	Annealed	190	13	◎	◎	◎
	3		About 0.45% C	Quenched & Tempered	250	25	◎	◎	◎
	4		About 0.75% C	Annealed	270	28	◎	◎	◎
	5		About 0.75% C	Quenched & Tempered	300	32	◎	◎	◎
	6	Low alloy steel		Annealed	180	10	◎	◎	◎
	7			Quenched & Tempered	275	29	◎	◎	◎
	8			Quenched & Tempered	300	32	◎	◎	◎
	9			Quenched & Tempered	350	38	○	○	○
	10	High alloyed steel, and tool steel		Annealed	200	15	◎	◎	◎
	11			Quenched & Tempered	325	35	○	○	○
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15			
	13		Martensitic	Quenched & Tempered	240	23			
	14		Austenitic		180	10			
K	15	Grey cast iron	Pearlitic / ferritic		180	10			
	16		Pearlitic (Martensitic)		260	26			
	17	Nodular cast iron	Ferritic		160	3			
	18		Pearlitic		250	25			
	19	Malleable cast iron	Ferritic		130				
	20		Pearlitic		230	21			
N	21	Aluminum-wrought alloy	Not Curable		60		○	○	○
	22		Curable Hardened		100		○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		○	○	○
	24		≤ 12% Si, Curable Hardened		90		○	○	○
	25		> 12% Si, Not Curable		130		○	○	○
	26	Copper and Copper Alloys	Cutting Alloys, PB>1%		110				
	27		CuZn, CuSnZn (Brass)		90				
	28	(Bronze / Brass)	CuSn, lead-free copper and electrolytic copper		100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium		400 Rm				
	37		Alpha + Beta Alloys	Hardened	1050 Rm				
H	38	Hardened steel		Hardened	550	55			
	39			Hardened	630	60			
	40	Chilled Cast Iron		Cast	400	42			
	41	Hardened Cast Iron		Hardened	550	55			

SERIES	ML012, ML022 ML112, ML122	ML032, ML042 ML132, ML142	ML062 ML162
	DOVETAIL CUTTERS	DOVETAIL CUTTERS	WOODRUFF KEYSEAT CUTTERS
FLUTE	-	-	-
HELIX ANGLE	0°	0°	10°-20°
SIZE MIN	D16.0	D16.0	D10.5
SIZE MAX	D50.0	D38.0	D45.5
PAGE	C706	C707	C708
Type A, C, E	Type B, D, F	Type B, D, F	Type B, D, F
Uncoated	Uncoated	Uncoated	Uncoated
HSS-E	HSS-E	HSS-E	HSS-E
			

ML072, ML172 SERIES

MULTI FLUTE T-SLOT CUTTERS TYPE 'AA', 'AB', 'AD'

Vc = m/min.
 fz = mm/tooth
 RPM = rev./min.
 FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)											
				12.5	16.0	18.0	19.0	21.0	22.0	25.0	28.0	32.0	50.0	63.0	
P	1	Non-alloy steel	Vc	30	30	30	30	30	30	30	30	30	40	50	
			fz	0.008	0.013	0.014	0.017	0.018	0.021	0.028	0.036	0.036	0.037	0.036	
			RPM	764	597	531	503	455	434	382	341	298	255	253	
	FEED		37	47	45	51	49	55	64	74	86	75	73		
	2		Vc	15	15	15	15	15	15	15	15	15	20	25	
			fz	0.007	0.011	0.012	0.013	0.016	0.019	0.026	0.037	0.035	0.037	0.04	
			RPM	382	298	265	251	227	217	191	171	149	127	126	
	FEED		16	20	19	20	22	25	30	38	42	38	40		
	3-4		Vc	10	10	10	10	10	10	10	10	10	15	15	
			fz	0.005	0.007	0.01	0.014	0.017	0.019	0.022	0.028	0.025	0.028	0.029	
		RPM	255	199	177	168	152	145	127	114	99	95	76		
	FEED	8	8	11	14	15	16	17	19	20	21	18			
	6	Low alloy steel	Vc	15	15	15	15	15	15	15	15	15	20	25	
			fz	0.007	0.011	0.012	0.013	0.016	0.019	0.026	0.037	0.035	0.037	0.04	
			RPM	382	298	265	251	227	217	191	171	149	127	126	
	FEED		16	20	19	20	22	25	30	38	42	38	40		
	7		Vc	10	10	10	10	10	10	10	10	10	15	15	
			fz	0.005	0.007	0.01	0.014	0.017	0.019	0.022	0.028	0.025	0.028	0.029	
			RPM	255	199	177	168	152	145	127	114	99	95	76	
FEED	8		8	11	14	15	16	17	19	20	21	18			
10	High alloyed steel, and tool steel		Vc	15	15	15	15	15	15	15	15	15	20	25	
		fz	0.007	0.011	0.012	0.013	0.016	0.019	0.026	0.037	0.035	0.037	0.04		
		RPM	382	298	265	251	227	217	191	171	149	127	126		
FEED		16	20	19	20	22	25	30	38	42	38	40			
N		21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	Vc	90	90	95	90	95	90	90	90	90	125	145
				fz	0.008	0.013	0.015	0.017	0.019	0.021	0.026	0.034	0.034	0.036	0.036
	RPM			2292	1790	1680	1508	1440	1302	1146	1023	895	796	733	
	FEED			110	140	151	154	164	164	179	209	244	229	211	

CARBIDE

HSS

 CBN
END MILLS

 i-Xmill
END MILLS

 i-SMART
MODULAR
END MILLS

 X5070
END MILLS

 4G MILL
END MILLS

 X-POWER
PRO
END MILLS

 TitaNox-
POWER
END MILLS

 JET-POWER
END MILLS

 V7 PLUS
END MILLS

 ALU-POWER
HPC
END MILLS

 ALU-
POWER
END MILLS

 D-POWER
GRAPHITE
END MILLS

 CRX S
END MILLS

 K-2
END MILLS

 ONLY ONE
COATED PM60
END MILLS

 TANK-
POWER
END MILLS

 GENERAL
HSS
END MILLS

 MILLING
CUTTERS

 TECHNICAL
DATA