


Milling - Shoulder Milling - Inserts

**ADKT / AOMT** - Shoulder Milling Positive (2 Corner)

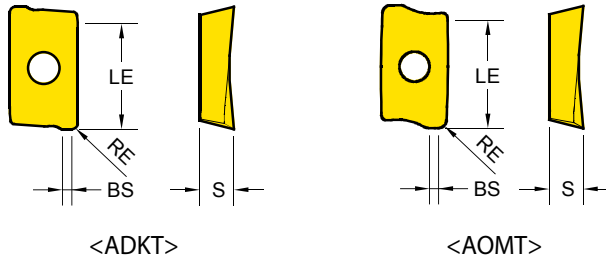

| Series    | LE   | IC  | S   |
|-----------|------|-----|-----|
| ADKT 1505 | 13.7 | 9.7 | 5.8 |
| AOMT 1236 | 10.5 | 6.6 | 3.6 |

EDP 1200..

●: Stock item ○: Order made item

|     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|
| P25 | P30 | P20 | P30 | P40 | K15 | K15 |
| M30 |     |     |     | M40 | H15 | K15 |
| S20 | K30 |     |     |     |     |     |

| ADKT                       | Designation      | RE (mm) | Fz (mm/tooth) | BS (mm) | YG602  | YG622 | YG712 | YG713 | YG613 | YG501 | YG5020 |
|----------------------------|------------------|---------|---------------|---------|--------|-------|-------|-------|-------|-------|--------|
| <b>ADKT</b><br>General<br> | ADKT 150508 PDTR | 0.8     | 0.16 ~ 0.30   | 1.87    | ● 0220 |       |       |       |       |       |        |
|                            |                  |         |               |         |        |       |       |       |       |       |        |

| AOMT                       | Designation      | RE (mm) | Fz (mm/tooth) | BS (mm) | YG602  | YG622 | YG712 | YG713 | YG613  | YG501 | YG5020 |
|----------------------------|------------------|---------|---------------|---------|--------|-------|-------|-------|--------|-------|--------|
| <b>AOMT</b><br>General<br> | AOMT 123604 PDTR | 0.4     | 0.08 ~ 0.22   | 1.07    | ● 0217 |       |       |       |        |       |        |
|                            | AOMT 123608 PDTR | 0.8     | 0.08 ~ 0.24   | 0.91    | ● 0218 |       |       |       | ● 0613 |       |        |

| Cutting Speed |       |                            | Vc (m/min.) |     |       |     |       |     |       |     |       |     |       |     |        |     |
|---------------|-------|----------------------------|-------------|-----|-------|-----|-------|-----|-------|-----|-------|-----|-------|-----|--------|-----|
| ISO           | VDI   | Sub Group                  | YG602       |     | YG622 |     | YG712 |     | YG713 |     | YG613 |     | YG501 |     | YG5020 |     |
|               |       |                            | Min         | Max | Min   | Max | Min   | Max | Min   | Max | Min   | Max | Min   | Max | Min    | Max |
| P             | 1~5   | Non-Alloyed Steel          | 180         | 380 | 140   | 400 | 170   | 300 | 200   | 300 | 100   | 210 | -     | -   | -      | -   |
|               | 6~9   | Low-Alloyed Steel          | 120         | 300 | 120   | 320 | 180   | 250 | 170   | 270 | 70    | 180 | -     | -   | -      | -   |
|               | 10~11 | High-Alloyed Steel         | 70          | 150 | 70    | 170 | 100   | 140 | 85    | 145 | 40    | 90  | -     | -   | -      | -   |
| M             | 12~13 | Ferritic & Martensitic     | 120         | 200 | -     | -   | -     | -   | -     | -   | 70    | 180 | -     | -   | -      | -   |
|               | 14    | Austenitic Stainless Steel | 130         | 250 | -     | -   | -     | -   | -     | -   | 70    | 200 | -     | -   | -      | -   |
| K             | 15~16 | Grey Cast Iron             | 120         | 250 | 120   | 270 | -     | -   | -     | -   | -     | -   | 160   | 300 | 200    | 350 |
|               | 17~18 | Nodular Cast Iron          | 130         | 220 | 130   | 240 | -     | -   | -     | -   | -     | -   | 130   | 210 | 150    | 300 |
| N             | 21~30 | Non-Ferrous Metals (Al)    | -           | -   | -     | -   | -     | -   | -     | -   | -     | -   | -     | -   | -      | -   |
| S             | 31~37 | Superalloys & Titanium     | 25          | 45  | -     | -   | -     | -   | -     | -   | -     | -   | -     | -   | -      | -   |
| H             | 38~41 | Hard Materials             | 40          | 80  | 40    | 100 | -     | -   | -     | -   | -     | -   | -     | -   | -      | -   |

# Insert ISO Code System

TURNING

PARTING & GROOVING

MILLING


DRILLING

TECHNICAL INFORMATION

|                               |   |                                   |  |                                      |   |                                       |
|-------------------------------|---|-----------------------------------|--|--------------------------------------|---|---------------------------------------|
| <b>1</b><br><b>A</b><br>Shape | <b>2</b><br><b>P</b><br>Relief Angle (AN) | <b>3</b><br><b>K</b><br>Tolerance | <b>4</b><br><b>T</b><br>Clamping & Chipbreaker | <b>5</b><br><b>16</b><br>Insert Size | <b>6</b><br><b>04</b><br>Insert Thickness (S) | <b>7</b><br><b>08</b><br>CornerRadius |
|-------------------------------|---|-----------------------------------|--|--------------------------------------|---|---------------------------------------|

## 1 - Shape

| Symbol   | Shape             |  |
|----------|-------------------|--|
| <b>H</b> | Hexagonal         |  |
| <b>O</b> | Octagonal         |  |
| <b>P</b> | Pentagonal        |  |
| <b>S</b> | Square            |  |
| <b>T</b> | Triangular        |  |
| <b>V</b> | Rhombic 35°       |  |
| <b>W</b> | Trigon            |  |
| <b>L</b> | Rectangular       |  |
| <b>A</b> | Parallelogram 80° |  |
| <b>R</b> | .Round            |  |

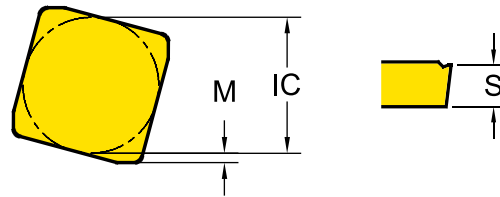

## 3 - Tolerance Class

| Symbol    | Inner Circle IC (mm) | Nose Height M (mm) | Thickness S (mm) |
|-----------|----------------------|--------------------|------------------|
| <b>C</b>  | ± 0.025              | ± 0.013            | ± 0.025          |
| <b>E</b>  | ± 0.025              | ± 0.025            | ± 0.025          |
| <b>G</b>  | ± 0.025              | ± 0.025            | ± 0.13           |
| <b>H</b>  | ± 0.013              | ± 0.013            | ± 0.025          |
| <b>K*</b> | ± 0.05~0.15*         | ± 0.013            | ± 0.025          |
| <b>M*</b> | ± 0.05~0.15*         | ± 0.08~0.2*        | ± 0.13           |
| <b>U*</b> | ± 0.08~0.25*         | ± 0.13~0.38*       | ± 0.13           |

\* Tolerance is different by insert IC size. Please see ISO 1832

## 4 - Clamping & Chipbreaker

| Symbol   | Clamping         | Chipbreaker | Figure |
|----------|------------------|-------------|--------|
| <b>N</b> | No clamping hole | X           |        |
| <b>R</b> |                  | One Face    |        |
| <b>W</b> | Screw Hole       | X           |        |
| <b>T</b> |                  | One Face    |        |
| <b>U</b> |                  | Both Faces  |        |
| <b>X</b> | Special          |             |        |

## 2 - Relief Angle (AN)

| Symbol   | Relief Angle (AN) |  |
|----------|-------------------|--|
| <b>N</b> | No Relief Angle   |  |
| <b>B</b> | Relief 5°         |  |
| <b>C</b> | Relief 7°         |  |
| <b>P</b> | Relief 11°        |  |
| <b>D</b> | Relief 15°        |  |
| <b>E</b> | Relief 20°        |  |
| <b>F</b> | Relief 25°        |  |
| <b>O</b> | Special           |  |

## 5 - Insert Size


\* No Standard for milling insert size

## 6 - Insert Thickness

\* No Standard for milling insert thickness

# Milling - Code System


## Insert ISO Code System

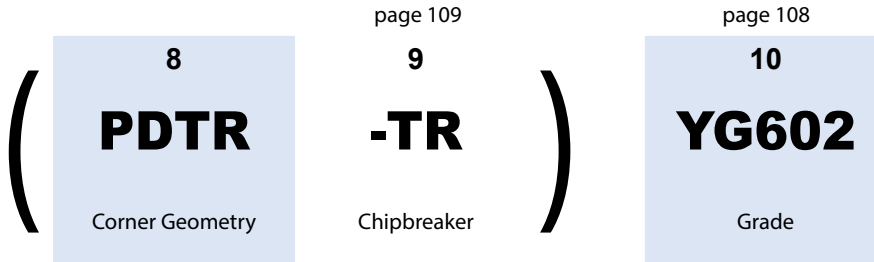

### 7 - Corner Radius (RE)

| Symbol    | Thickness - S (mm) | Symbol    | Thickness - S (mm) |
|-----------|--------------------|-----------|--------------------|
| <b>04</b> | 0.4                | <b>16</b> | 1.6                |
| <b>08</b> | 0.8                | <b>20</b> | 2.0                |
| <b>12</b> | 1.2                | <b>24</b> | 2.4                |

### 8 - Corner Geometry

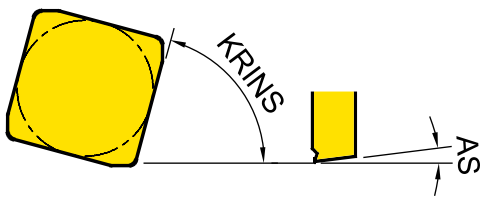

| 8-1<br><b>P</b>            | 8-2<br><b>D</b>           | 8-3<br><b>T</b> | 8-4<br><b>R</b> |
|----------------------------|---------------------------|-----------------|-----------------|
| Cutting Edge Angle (KRINS) | Wiper Edge Clearance (AS) | Edge Condition  | Feed Direction  |

\*Refer to page. 109 for -AL, -ST, -TR... types

#### 8-1 - Cutting Edge Angle (KRINS)

| Symbol   | Cutting Edge Angle (KRINS) |
|----------|----------------------------|
| <b>P</b> | 90°                        |
| <b>A</b> | 45°                        |
| <b>D</b> | 60°                        |
| <b>E</b> | 75°                        |
| <b>F</b> | 85°                        |
| <b>Z</b> | Special                    |

#### 8-3 - Edge Condition

| Symbol   | Edge Condition        |
|----------|-----------------------|
| <b>F</b> | Sharp                 |
| <b>E</b> | Rounded               |
| <b>T</b> | Chamfered             |
| <b>S</b> | Chamfered and Rounded |

#### 8-2 - Wiper Edge Clearance (AS)

| Symbol   | Wiper Edge Clearance (AS) |
|----------|---------------------------|
| <b>N</b> | 0°                        |
| <b>P</b> | 11°                       |
| <b>D</b> | 15°                       |
| <b>E</b> | 20°                       |
| <b>F</b> | 25°                       |
| <b>Z</b> | Special                   |






#### 8-4 - Feed Direction

| Symbol   | Feed Direction    |
|----------|-------------------|
| <b>R</b> | Right-hand Insert |
| <b>N</b> | Neutral Insert    |
| <b>L</b> | Left-hand Insert  |

# Milling Grades and Chipbreakers




## Milling Grades

| Milling Grades | P Steel |     |     |     |     | M Stainless steel |     |     |     | K Cast iron |     |     |     | N Non-ferrous |     |     |     | S Superalloys |     |     |     |  |
|----------------|---------|-----|-----|-----|-----|-------------------|-----|-----|-----|-------------|-----|-----|-----|---------------|-----|-----|-----|---------------|-----|-----|-----|--|
|                | P05     | P15 | P25 | P35 | P45 | M05               | M15 | M25 | M35 | K05         | K15 | K25 | K35 | N05           | N15 | N25 | N35 | S05           | S15 | S25 | S35 |  |
| PVD            | YG602   |     | 602 |     |     |                   | 602 |     |     | 602         |     |     |     |               |     |     |     |               | 602 |     |     |  |
|                | YG622   |     | 622 |     |     |                   |     |     |     | 622         |     |     |     |               |     |     |     |               |     |     |     |  |
|                | YG712   |     | 712 |     |     |                   |     |     |     |             |     |     |     |               |     |     |     |               |     |     |     |  |
|                | YG713   |     | 713 |     |     |                   |     |     |     |             |     |     |     |               |     |     |     |               |     |     |     |  |
|                | YG613   |     |     | 613 |     |                   |     | 613 |     |             |     |     |     |               |     |     |     |               |     |     |     |  |
|                | YG501   |     |     |     |     |                   |     |     |     | 501         |     |     |     |               |     |     |     |               |     |     |     |  |
| CVD            | YG5020  |     |     |     |     |                   |     |     |     | 5020        |     |     |     |               |     |     |     |               |     |     |     |  |
| Uncoated       | YG50    |     |     |     |     |                   |     |     |     |             |     |     |     | 50            |     |     |     |               |     |     |     |  |






|   |  |   |
|---|--|---|
| <p><b>YG602</b></p> <p>P20 - P35    M20 - M40</p> <p>K20 - K40    S15 - S25</p> |  <p>PVD - TiAlN</p>   | <p><b>Universal grade for General Milling Application</b></p> <ul style="list-style-type: none"> <li>• Ultra Dense PVD Coating with optimal thermal resistance &amp; strength</li> <li>• Sub-Micron substrate designed for demanding application</li> </ul>   |
| <p><b>YG622</b></p> <p>P20 - P40</p> <p>K20 - K40</p>                           |  <p>PVD - AlCrN</p>   | <p><b>Optimized Grade for High Alloyed or Prehardened Steel</b></p> <p>Excellent hot hardness and oxidation resistance at high speed</p>  |
| <p><b>YG712</b></p> <p>P10 - P30</p>  |  <p>PVD - TiAlCrN</p> | <p><b>Milling Grade for Medium of Steel Application</b></p> <ul style="list-style-type: none"> <li>• Superior wear resistance and excellent toughness in high speed machining</li> <li>• Coating layer with high hardness and oxidation resistance</li> </ul>   |
| <p><b>YG713</b></p> <p>P15 - P25</p>  |  <p>PVD - TiAlN</p>   | <p><b>Milling Grade for General Steel Application</b></p> <ul style="list-style-type: none"> <li>• Multi-layer TiAlN structure realizes stronger crater and flank wear resistance</li> <li>• Fine-grained carbide and balanced substrate</li> </ul>   |
| <p><b>YG613</b></p> <p>P30 - P50</p> <p>M30 - M40</p>                           |  <p>PVD - TiAlN</p>   | <p><b>Milling Grade for Stainless Steel Application</b></p> <ul style="list-style-type: none"> <li>• New coating layer with high toughness and lubrication on ultra fine grain substrate with high toughness.</li> <li>• The toughest substrates provides excellent cutting performance in stainless steel</li> </ul> |

# Milling Grades and Chipbreakers

## Milling Grades

|  |  |   |
|--|--|---|
| <p><b>YG501</b><br/> <span style="background-color: red; color: white; padding: 2px;">K05 - K25</span><br/> <span style="background-color: gray; color: white; padding: 2px;">H05 - H25</span></p> | <br>PVD - TiAlN                               | <p><b>Hard Milling grade for Cast Iron</b></p> <ul style="list-style-type: none"> <li>• Substrate especially designed for high wear resistance</li> <li>• Excellent wear resistance in cast iron milling application</li> </ul> |
| <p><b>YG5020</b><br/> <span style="background-color: red; color: white; padding: 2px;">K01 - K30</span></p>  | <br>CVD TiCN - Al <sub>2</sub> O <sub>3</sub> | <p><b>CVD Milling grade for Cast Iron</b></p> <ul style="list-style-type: none"> <li>• CVD coating for Excellent wear resistance</li> <li>• Improved Toughness for chipping resistance</li> </ul>                               |
| <p><b>YG50</b><br/> <span style="background-color: green; color: white; padding: 2px;">N05 - N20</span></p>  | <br>Uncoated                                  | <p><b>Uncoated Milling Grade for Aluminium</b></p> <ul style="list-style-type: none"> <li>• Submicron carbide substrate for high wear resistance</li> <li>• Preventing built up edge with shining surface</li> </ul>            |

## Milling Chipbreakers

|   |   |  |
|---|---|--|
| <p><b>-AL</b></p>   |  | <ul style="list-style-type: none"> <li>• For Aluminum</li> <li>• Very Sharp Geometry</li> </ul>                |
| <p><b>-ST</b></p>   |  | <ul style="list-style-type: none"> <li>• For Stainless Steel, Super Alloy</li> <li>• Sharp Geometry</li> </ul> |
| <p><b>General Inserts</b><br/>                 (No Description)</p> |  | <ul style="list-style-type: none"> <li>• First Choice for General Application</li> </ul>                       |
| <p><b>-TR</b></p>   |  | <ul style="list-style-type: none"> <li>• For Hardened Steels</li> <li>• Reinforced Geometry</li> </ul>         |
| <p><b>...W / ...N</b></p>   |  | <ul style="list-style-type: none"> <li>• For Hardened Material and Cast Irons</li> </ul>                       |