


Milling - Shoulder Milling - Inserts
APKT - Shoulder Milling Positive (2 Corner)



Series	LE	IC	S
APKT 1003	9.9	6.7	3.6
APKT 1604	15.2	9.4	5.3

EDP 1200..

●: Stock item ○: Order made item

P25	P30	P20	P30	P40	K15	K15
M30				M40	H15	
K30	K30					
S20						

APKT	Designation	RE (mm)	Fz (mm/tooth)	BS (mm)	YG602	YG622	YG712	YG713	YG613	YG501	YG5020
APKT General	APKT 100305 PDTR	0.5	0.15 ~ 0.24	0.86	● 0005	○ 0429		● 0638	● 0672		
	APKT 100308 PDTR	0.8	0.15 ~ 0.24	0.90	● 0004	○ 0430		● 0632	● 0610		
	APKT 160404 PDTR	0.4	0.15 ~ 0.25	1.11	● 0003			● 0656			
	APKT 160408 PDTR	0.8	0.15 ~ 0.30	1.32	● 0001			● 0633	● 0607		
	APKT 160412 PDTR	1.2	0.15 ~ 0.32	1.13	● 0002			● 0649			
	APKT 160416 PDTR	1.6	0.15 ~ 0.34	1.13	● 0006			● 0661			
	APKT 160424 PDTR	2.4	0.15 ~ 0.38		● 0255			● 0653			
-ST Stainless Steel Super Alloy	APKT 100305 - ST	0.5	0.08 ~ 0.22	0.86	● 0278				● 0618		
	APKT 160408 - ST	0.8	0.08 ~ 0.25	1.32	● 0270				● 0617		
-TR Hardened Steel	APKT 160404 - TR	0.4	0.26 ~ 0.40	2.12	● 0492	○ 0505					
	APKT 160408 - TR	0.8	0.26 ~ 0.40	1.32	● 0256	○ 0337		● 0637			
	APKT 160412 - TR	1.2	0.26 ~ 0.40	2.40	● 0493	○ 0523					
	APKT 160416 - TR	1.6	0.26 ~ 0.40	2.40	● 0472	○ 0524					
	APKT 160424 - TR	2.4	0.26 ~ 0.40	1.50	● 0494	○ 0520					

Cutting Speed			Vc (m/min.)													
ISO	VDI	Sub Group	YG602		YG622		YG712		YG713		YG613		YG501		YG5020	
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
P	1-5	Non-Alloyed Steel	180	380	140	400	170	300	200	300	100	210	-	-	-	-
	6-9	Low-Alloyed Steel	120	300	120	320	180	250	170	270	70	180	-	-	-	-
	10-11	High-Alloyed Steel	70	150	70	170	100	140	85	145	40	90	-	-	-	-
M	12-13	Ferritic & Martensitic	120	200	-	-	-	-	-	-	70	180	-	-	-	-
	14	Austenitic Stainless Steel	130	250	-	-	-	-	-	-	70	200	-	-	-	-
K	15-16	Grey Cast Iron	120	250	120	270	-	-	-	-	-	-	160	300	200	350
	17-18	Nodular Cast Iron	130	220	130	240	-	-	-	-	-	-	130	210	150	300
N	21-30	Non-Ferrous Metals (Al)	-	-	-	-	-	-	-	-	-	-	-	-	-	-
S	31-37	Superalloys & Titanium	25	45	-	-	-	-	-	-	-	-	-	-	-	-
H	38-41	Hard Materials	40	80	40	100	-	-	-	-	-	-	-	-	-	-

Insert ISO Code System

TURNING

PARTING & GROOVING

MILLING


DRILLING

TECHNICAL INFORMATION

1 A Shape	2 P Relief Angle (AN)	3 K Tolerance	4 T Clamping & Chipbreaker	5 16 Insert Size	6 04 Insert Thickness (S)	7 08 CornerRadius
-------------------------------	---	-----------------------------------	--	--------------------------------------	---	---------------------------------------

1 - Shape

Symbol	Shape	
H	Hexagonal	
O	Octagonal	
P	Pentagonal	
S	Square	
T	Triangular	
V	Rhombic 35°	
W	Trigon	
L	Rectangular	
A	Parallelogram 80°	
R	.Round	

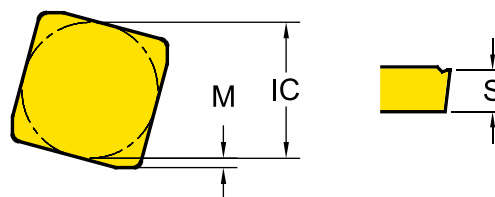

3 - Tolerance Class

Symbol	Inner Circle IC (mm)	Nose Height M (mm)	Thickness S (mm)
C	± 0.025	± 0.013	± 0.025
E	± 0.025	± 0.025	± 0.025
G	± 0.025	± 0.025	± 0.13
H	± 0.013	± 0.013	± 0.025
K*	± 0.05~0.15*	± 0.013	± 0.025
M*	± 0.05~0.15*	± 0.08~0.2*	± 0.13
U*	± 0.08~0.25*	± 0.13~0.38*	± 0.13

* Tolerance is different by insert IC size. Please see ISO 1832

4 - Clamping & Chipbreaker

Symbol	Clamping	Chipbreaker	Figure
N	No clamping hole	X	
R		One Face	
W	Screw Hole	X	
T		One Face	
U		Both Faces	
X	Special		

2 - Relief Angle (AN)

Symbol	Relief Angle (AN)	
N	No Relief Angle	
B	Relief 5°	
C	Relief 7°	
P	Relief 11°	
D	Relief 15°	
E	Relief 20°	
F	Relief 25°	
O	Special	

5 - Insert Size


* No Standard for milling insert size

6 - Insert Thickness

* No Standard for milling insert thickness

Milling - Code System


Insert ISO Code System

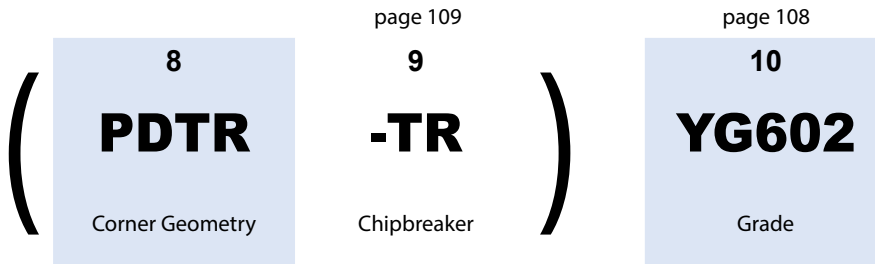

7 - Corner Radius (RE)

Symbol	Thickness - S (mm)	Symbol	Thickness - S (mm)
04	0.4	16	1.6
08	0.8	20	2.0
12	1.2	24	2.4

8 - Corner Geometry

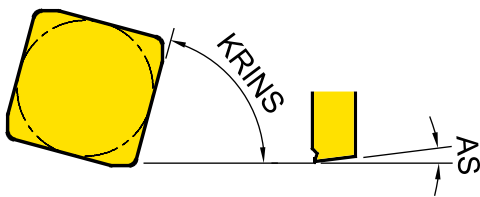

8-1 P	8-2 D	8-3 T	8-4 R
Cutting Edge Angle (KRINS)	Wiper Edge Clearance (AS)	Edge Condition	Feed Direction

*Refer to page. 109 for -AL, -ST, -TR... types

8-1 - Cutting Edge Angle (KRINS)

Symbol	Cutting Edge Angle (KRINS)
P	90°
A	45°
D	60°
E	75°
F	85°
Z	Special

8-3 - Edge Condition

Symbol	Edge Condition
F	Sharp
E	Rounded
T	Chamfered
S	Chamfered and Rounded

8-2 - Wiper Edge Clearance (AS)

Symbol	Wiper Edge Clearance (AS)
N	0°
P	11°
D	15°
E	20°
F	25°
Z	Special






8-4 - Feed Direction

Symbol	Feed Direction
R	Right-hand Insert
N	Neutral Insert
L	Left-hand Insert

Milling Grades and Chipbreakers




Milling Grades

Milling Grades	P Steel					M Stainless steel				K Cast iron				N Non-ferrous				S Superalloys				
	P05	P15	P25	P35	P45	M05	M15	M25	M35	K05	K15	K25	K35	N05	N15	N25	N35	S05	S15	S25	S35	
PVD	YG602		602				602				602								602			
	YG622		622								622											
	YG712		712																			
	YG713		713																			
	YG613			613				613														
	YG501										501											
CVD	YG5020									5020												
Uncoated	YG50													50								






<p>YG602</p> <p>P20 - P35 M20 - M40</p> <p>K20 - K40 S15 - S25</p>	 <p>PVD - TiAlN</p>	<p>Universal grade for General Milling Application</p> <ul style="list-style-type: none"> • Ultra Dense PVD Coating with optimal thermal resistance & strength • Sub-Micron substrate designed for demanding application
<p>YG622</p> <p>P20 - P40</p> <p>K20 - K40</p>	 <p>PVD - AlCrN</p>	<p>Optimized Grade for High Alloyed or Prehardened Steel</p> <p>Excellent hot hardness and oxidation resistance at high speed</p>
<p>YG712</p> <p>P10 - P30</p>	 <p>PVD - TiAlCrN</p>	<p>Milling Grade for Medium of Steel Application</p> <ul style="list-style-type: none"> • Superior wear resistance and excellent toughness in high speed machining • Coating layer with high hardness and oxidation resistance
<p>YG713</p> <p>P15 - P25</p>	 <p>PVD - TiAlN</p>	<p>Milling Grade for General Steel Application</p> <ul style="list-style-type: none"> • Multi-layer TiAlN structure realizes stronger crater and flank wear resistance • Fine-grained carbide and balanced substrate
<p>YG613</p> <p>P30 - P50</p> <p>M30 - M40</p>	 <p>PVD - TiAlN</p>	<p>Milling Grade for Stainless Steel Application</p> <ul style="list-style-type: none"> • New coating layer with high toughness and lubrication on ultra fine grain substrate with high toughness. • The toughest substrates provides excellent cutting performance in stainless steel

Milling Grades and Chipbreakers

Milling Grades

<p>YG501 K05 - K25 H05 - H25</p>	 <p>PVD - TiAlN</p>	<p>Hard Milling grade for Cast Iron</p> <ul style="list-style-type: none"> • Substrate especially designed for high wear resistance • Excellent wear resistance in cast iron milling application
<p>YG5020 K01 - K30</p>	 <p>CVD TiCN - Al₂O₃</p>	<p>CVD Milling grade for Cast Iron</p> <ul style="list-style-type: none"> • CVD coating for Excellent wear resistance • Improved Toughness for chipping resistance
<p>YG50 N05 - N20</p>	 <p>Uncoated</p>	<p>Uncoated Milling Grade for Aluminium</p> <ul style="list-style-type: none"> • Submicron carbide substrate for high wear resistance • Preventing built up edge with shining surface

Milling Chipbreakers

<p>-AL</p>		<ul style="list-style-type: none"> • For Aluminum • Very Sharp Geometry
<p>-ST</p>		<ul style="list-style-type: none"> • For Stainless Steel, Super Alloy • Sharp Geometry
<p>General Inserts (No Description)</p>		<ul style="list-style-type: none"> • First Choice for General Application
<p>-TR</p>		<ul style="list-style-type: none"> • For Hardened Steels • Reinforced Geometry
<p>...W / ...N</p>		<ul style="list-style-type: none"> • For Hardened Material and Cast Irons