
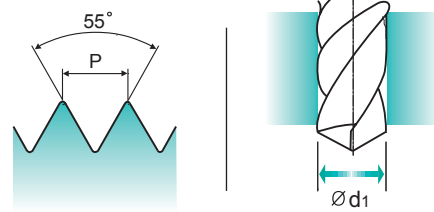
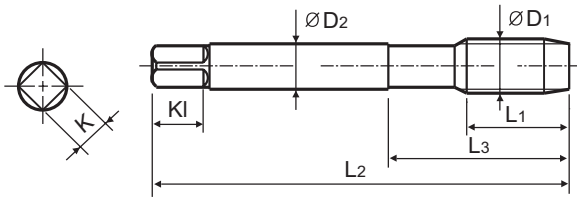


G(BSP) Whitworth pipe threads DIN ISO 228/1
 ● Whitworth Rohrgewinde DIN ISO 228/1
 ○ G(BSP) PROFIL 55° DIN ISO 228/1
 ○ Filettatura Whitworth per tubi DIN ISO 228/1

► Suitable for tapping blind holes due to special flute geometry and excellent chip evacuation.

► Geeignet zum Gewinden von Sacklöchern dank besonderer Nutengeometrie und ausgezeichneter Spanabfuhr.



Material groups **VG** **HSS-E** **DIN 5156** **55°** **C** **Bright** **R40**

Machine taps
Maschinengewindebohrer

Recommended Cutting Page : P.306

Unit : mm

SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1		Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
G1/8 - 28		TC729200	20	90	36	7	5.5	8	3	8.8
G1/4 - 19		TC729400	22	100	40	11	9	12	3	11.8
G3/8 - 19		TC729480	22	100	40	12	9	12	3	15.25
G1/2 - 14		TC729560	25	125	50	16	12	15	4	19
G3/4 - 14		TC729700	28	140	54	20	16	19	4	24.5
G1 - 11		TC729780	30	160	60	25	20	23	4	30.75

◎ : Excellent ○ : Good

ISO	P									M						K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended						○	○	◎	◎					○							
ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended																					

					TC728	TC729	TB514	TC727	
THREAD MILLS					Vc (m/min)				
SYNCHRO TAPS	ISO	VDI 3323	Material Description	HB	HRc				
COMBO TAPS	P	1	Non-alloy steel	125				15-20	
		2		190	13	15-20		15-20	15-20
3		250		25	12-18			12-18	
4		270		28	10-15			10-15	
5		300		32					
YG TAP GENERAL		6	Low alloy steel	180	10	10-15	10-15		10-15
YG TAP STEEL		7		275	29	10-15	10-15		10-15
YG TAP HARDENED		8		300	32		6-10		
		9		350	38		3-5		
YG TAP INOX		10	High alloyed steel, and tool steel	200	15				
		11		325	35				
YG TAP CAST IRON	M	12	Stainless steel	200	15			7-10	
		13		240	23			5-8	
		14		180	10		4-6	4-6	
YG TAP ALU	K	15	Grey cast iron	180	10				
				260	26				
		17	Nodular cast iron	160	3	10-15			10-15
		18		250	25	5-8			5-8
		19	Malleable cast iron	130					
20	230	21							
YG TAP FORMING	N	21	Aluminum-wrought alloy	60		10-15			10-15
		22		100		10-15			10-15
NUT TAPS		23	Aluminum-cast, alloyed	75		15-20			15-20
		24		90		15-20			15-20
		25		130		10-15			10-15
STI TAPS		26	Copper and Copper Alloys (Bronze / Brass)	110		25-35			25-35
		27		90		8-12			8-12
PIPE TAPS		28		100					
		29	Non Metallic Materials						
		30							
TECHNICAL DATA	S	31	Heat Resistant Super Alloys	200	15				
				280	30				
				250	25				
				350	38				
				320	34				
		36	Titanium Alloys	400 Rm					
				1050 Rm					
H	Hardened steel	38	550	55					
		39	630	60					
		40	Chilled Cast Iron	400	42				
		41	Hardened Cast Iron	550	55				

SURFACE TREATMENT AND COATING

The applied High Speed Steels holds a grant of good wear resistance and toughness. Therefore YG-1 normally delivers taps with bright and unfinished surface. For certain materials, various surface treatments provide higher advantage in machining.

STEAM TEMPERED - Vap

Steam Tempered is a Fe₃O₄-oxyd-coating which reduces friction between the tool and workpiece, also preventing cold welding.

NITRIDING - NI

Recommend surface treatment for machining materials that affect wear abrasion, such as grey cast iron, alu-alloys with high Si-percentages (more than 10%).

Below are the various surface treatments for excellent finish surfaces suitable for many applications. The surface treatments are produced and developed within the company.

TiN-COATING

TiN-coating yields a hardness of approx. 2,300 HV and also a heat resistant up to approx. 600°C. The current coating is an excellent all-round coating for normal applications.

Colour : Golden Coefficient of friction against steel : 0.4

TiCN-COATING

TiCN takes place of TiN when the conditions require the coating to have a different hardness and toughness.

The TiCN brings advantages for machining very difficult steels or cutting interrupted bores.

The TiCN-coating has a hardness of approx. 3,000 HV, but is heat resistance only holds up to approx. 400°C, meaning that the TiCN needs an excellent cooling system for a long service life.

Colour : Blue-Grey Coefficient of friction against steel : 0.4

TiAlN-COATING

A special coating for machining abrasive materials such as grey cast iron, alu-alloys with silicon, fiber reinforced plastics, etc., or machining at high temperatures with insufficient cooling, or at high speeds ≥ 600 m/min. TiAlN has a hardness of approx. 3,000 HV and is heat resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.4

Hardslick-COATING

Hardslick combines the advantages of an extremely hard, thermally stable TiAlN-coating with the sliding and lubricating properties of an outer WC/C(Tungsten carbide/carbon)-coating in a novel way. The Hardslick coating has a hardness of approx. 3,000 HV and is temperature-resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.2

SELECTION GUIDE



**HSS & HSS-E
PIPE
TAPS**

Tapping Whitworth Pipe threads

HOLE TYPE		Max. 2.0xD Blind/Through Hole	Max. 2.5xD Blind Hole	Max. 3.0xD Through Hole			
TOOL MATERIAL		HSS		HSS-E			
CHAMFER LEAD ACC. TO DIN2197		I/III		C B			
FLUTE TYPE		Straight Flute		Spiral Flute Spiral Point			
SPIRAL FLUTE ANGLE		-		R40 R40 R40 -			
SERIES	M	DIN371/376					
		DIN352					
		DIN357/LONG					
	MF	DIN374					
		DIN2181					
	UNC	DIN371/376					
		DIN351					
	UNF	DIN371/374					
		DIN2181					
	BSW	DIN2182/2183					
		DIN351					
	G(BSP)	DIN5156/5157	T7709 (P.301)	TC728 (P.302)	TC729 (P.303)	TB514 (P.304)	TC727 (P.305)
	EG-M	DIN371/376					
EG-UNC	DIN371/376						
EG-UNF	DIN371/374						
SURFACE TREATMENT		Bright	Bright	Bright	VAP	Bright	
MODEL							



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.306

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc						
P	1	Non-alloy steel	About 0.15% C Annealed		125		○			◎		
	2		About 0.45% C Annealed		190	13	○	◎		◎	◎	
	3		About 0.45% C Quenched & Tempered		250	25	○	◎			◎	
	YG TAP Ti Ni	4	Low alloy steel	About 0.75% C Annealed		270	28		◎			◎
		5		About 0.75% C Quenched & Tempered		300	32					
	YG TAP FORMING	6	Low alloy steel	Annealed		180	10	○	◎	○		◎
		7		Quenched & Tempered		275	29		◎	○		◎
		8		Quenched & Tempered		300	32			◎		
		9		Quenched & Tempered		350	38			◎		
	NUT TAPS	10	High alloyed steel, and tool steel	Annealed		200	15					
		11		Quenched & Tempered		325	35					
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15				◎		
	13		Martensitic	Quenched & Tempered	240	23				◎		
	14		Austenitic		180	10			○	◎		
K	15	Grey cast iron	Pearlitic / ferritic		180	10	○					
	16		Pearlitic (Martensitic)		260	26	○					
	Nodular cast iron	17	Ferritic		160	3			◎		◎	
		18	Pearlitic		250	25			◎		◎	
	Malleable cast iron	19	Ferritic		130							
20	Pearlitic		230	21								
N	21	Aluminum-wrought alloy	Not Curable		60		○	○			○	
	22		Curable Hardened		100		○	○			○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		○	○			○	
	24		≤ 12% Si, Curable Hardened		90			○			○	
	25		> 12% Si, Not Curable		130			◎			◎	
	26		Cutting Alloys, PB>1%		110			◎			◎	
	Copper and Copper Alloys (Bronze / Brass)	27	CuZn, CuSnZn (Brass)		90			○			○	
		28	CuSn, lead-free copper and electrolytic copper		100							
	Non Metallic Materials	29	Duroplastic, Fiber Reinforced Plastic									
		30	Rubber, Wood, etc.									
S	31	Heat Resistant Super Alloys	Fe Based Annealed		200	15						
	32		Cured		280	30						
	33		Annealed		250	25						
	34		Ni or Co Based Cured		350	38						
	35	Cast		320	34							
	Titanium Alloys	36	Pure Titanium		400 Rm							
		37	Alpha + Beta Alloys Hardened		1050 Rm							
H	38	Hardened steel	Hardened		550	55						
	39		Hardened		630	60						
	40	Chilled Cast Iron	Cast		400	42						
	41	Hardened Cast Iron	Hardened		550	55						