


### CARBIDE, NC MACHINE REAMERS - STRAIGHT FLUTES

- 🇩🇪 VHM, NC-MASCHINENREIBAHLEN - GERADEGENUTET
- 🇫🇷 ALÉSOIRS CARBURE MACHINE CN - ENTRÉE DROITE
- 🇮🇹 ALESATORI A MACCHINA IN MD - ELICA DRITTA


- ▶ Material - Up to Ø12.0 : Solid Carbide  
- Over Ø12.0 : Carbide Head Brazed
- ▶ Straight Flutes, Right Hand Cut
- ▶ Unequal Flute Spacing
- ▶ O.D. Tolerances : DIN 1420 for H7
- ▶ Shank : DIN 6535-HA
- ▶ Chamfer Angle - D < 3.0 : 15°  
- D ≥ 3.0 : 45°

- ▶ Material - bis Ø12,0 : VHM  
- über Ø12,0 : gelötete VHM-Köpfe
- ▶ geradegenutet, rechtsschneidend
- ▶ Ungleichteilung
- ▶ Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft : DIN 6535-HA
- ▶ Ansnittwinkel - bis Ø3,0 : 15°  
- über Ø3,0 : 45°

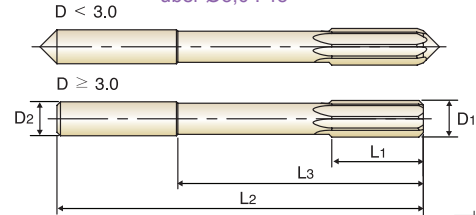

CARBIDE
H7
15°
45°
P.427

D < 3.0    D ≥ 3.0



Unit : mm

EDP No.	Reamer Diameter		Shank Diameter		Cutting Length		Neck Length		Overall Length		No. of Flute
	D1	D2	D2	D1	L1	L3	L3	L2	L2		
K410100200	2.0	4	4	2.0	11	20	20	50	4		
K410100250	2.5	4	4	2.5	14	26	26	57	4		
K410100300	3.0	4	4	3.0	15	31	31	61	6		
K410100350	3.5	4	4	3.5	18	36	36	70	6		
K410100400	4.0	4	4	4.0	19	42	42	75	6		
K410100450	4.5	6	6	4.5	21	46	46	80	6		
K410100500	5.0	6	6	5.0	23	51	51	86	6		
K410100550	5.5	6	6	5.5	26	56	56	93	6		
K410100600	6.0	8	8	6.0	26	62	62	93	6		
K410100650	6.5	8	8	6.5	28	62	62	101	6		
K410100700	7.0	8	8	7.0	31	68	68	109	6		
K410100750	7.5	8	8	7.5	31	68	68	109	6		
K410100800	8.0	8	8	8.0	33	74	74	117	6		
K410100850	8.5	10	10	8.5	33	74	74	117	6		
K410100900	9.0	10	10	9.0	36	80	80	125	6		
K410100950	9.5	10	10	9.5	36	80	80	125	6		
K410101000	10.0	10	10	10.0	38	86	86	133	6		
K410101050	10.5	12	12	10.5	38	86	86	133	6		
K410101100	11.0	12	12	11.0	41	95	95	142	6		
K410101200	12.0	12	12	12.0	44	104	104	151	6		
K410101300	13.0	16	16	13.0	44	104	104	151	6		
K410101400	14.0	16	16	14.0	47	108	108	160	8		
K410101500	15.0	16	16	15.0	50	110	110	162	8		
K410101600	16.0	16	16	16.0	52	118	118	170	8		
K410101700	17.0	20	20	17.0	54	121	121	175	8		
K410101800	18.0	20	20	18.0	56	128	128	182	8		
K410101900	19.0	20	20	19.0	58	129	129	189	8		
K410102000	20.0	20	20	20.0	60	135	135	195	8		

◎ : Excellent ○ : Good

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	40	42	45	48	50	52	55	58	60	62	65	68	70	72	75
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	○	○	○	○	◎	○	◎	○	◎	○

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	35	36	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○



RECOMMENDED CUTTING CONDITIONS  
EMPFOHLENE SCHNEIDPARAMETER

K4101, K4111 SERIES

CARBIDE, NC MACHINE REAMERS

RPM = rev./min.  
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Feed(mm/rev)								
				2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0
P	1	Non-alloy steel	18	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	2		17	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	3		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	4		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	5		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	6	Low alloy steel	17	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
	7		14	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
	8		14	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
	9											
	10	High alloyed steel, and tool steel	13	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
	11											
M	12	Stainless steel	8	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
	13		7	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
	14		6	0.06-0.08	0.08-0.10	0.10-0.12	0.12-0.15	0.15-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
K	15	Grey cast iron	20	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	16		15	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	17	Nodular cast iron	18	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	18		13	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	19	Malleable cast iron	18	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.20-0.24	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	20		13	0.08-0.10	0.10-0.12	0.12-0.16	0.16-0.20	0.2-0.240	0.24-0.28	0.28-0.32	0.32-0.36	0.36-0.40
N	21	Aluminum-wrought alloy	30	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50
	22		30	0.1-0.130	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50
	23	Aluminum-cast, alloyed	30	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50
	24		25	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50
	25											
	26	Copper and Copper Alloys (Bronze / Brass)	25	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50
	27		22	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50
	28		23	0.10-0.13	0.13-0.16	0.16-0.20	0.20-0.25	0.25-0.30	0.30-0.35	0.35-0.40	0.40-0.45	0.45-0.50
	29	Non Metallic Materials										
	30											
S	31	Heat Resistant Super Alloys										
	32											
	33											
	34											
	35											
	36	Titanium Alloys										
	37											
H	38	Hardened steel										
	39											
	40	Chilled Cast Iron										
	41	Hardened Cast Iron										

SELECTION GUIDE




SERIES

K4101

K4111

HOLETYPE



FLUTETYPE

Straight

LH Spiral

SIZE MIN

D2.0

D2.0

SIZE MAX

D20.0

D20.0

PAGE

406

407

SURFACE TREATMENT

Bright

# CARBIDE, HSS & HSS-E REAMERS

Carbide NC Machine Reamers  
HSS Hand Reamers  
HSS-E Chucking Reamers



Please visit [globalyg1.com/mat](http://globalyg1.com/mat) for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.427

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	K4101	K4111
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎
	4		About 0.75% C Annealed	270	28	○	○
	5		About 0.75% C Quenched & Tempered	300	32	○	○
	6	Low alloy steel	Annealed	180	10	◎	◎
	7		Quenched & Tempered	275	29	◎	◎
	8		Quenched & Tempered	300	32	○	○
	9		Quenched & Tempered	350	38		
	10		High alloyed steel, and tool steel	Annealed	200	15	○
	11	Quenched & Tempered		325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○
	13		Martensitic Quenched & Tempered	240	23	○	○
	14		Austenitic	180	10	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎
	16		Pearlitic (Martensitic)	260	26	○	○
	17	Nodular cast iron	Ferritic	160	3	◎	◎
	18		Pearlitic	250	25	○	○
	19		Ferritic	130		◎	◎
20	Malleable cast iron	Pearlitic	230	21	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	○
	22		Curable Hardened	100		○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○
	24		≤ 12% Si, Curable Hardened	90		○	○
	25		> 12% Si, Not Curable	130			
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○
	27		CuZn, CuSnZn (Brass)	90		○	○
	28		CuSn, lead-free copper and electrolytic copper	100		○	○
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic Rubber, Wood, etc.			
30							
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Ni or Co Based Cured	350	38		
	35		Cast	320	34		
36	Titanium Alloys	Pure Titanium	400 Rm				
37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55		
	39		Hardened	630	60		
	40	Chilled Cast Iron	Cast	400	42		
	41	Hardened Cast Iron	Hardened	550	55		