


## SM-POINT SPADE DRILL INSERTS - HSS M4

- SM-POINT EINWEG BOHREINSATZ - HSS M4
- Plaquettes SPADE DRILL, pointe SM - HSS M4
- CUSPIDI, SM-POINT - HSS M4



- ▶ For general use in steels and cast irons.
- ▶ Improved stability and hole straightness by newly developed thinning design.
- ▶ Less thrust force and excellent self-centering.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Stahl und Gusseisen
- ▶ Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschneidengeometrie
- ▶ Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A375

Recommended ToolHolder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245-246	-	-
		ER COLLET CHUCK		D73-115

Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	HSS M4		
					TiN	TiCN	TiAlN
<b>1</b> Ø17.53 (.690) to Ø24.38 (.960)	45/64	17.86	.7031	4.0 (5/32)	SM405045	SM410045	SM415045
		18.00	.7087		SM455180	SM460180	SM465180
	23/32	18.26	.7188		SM405046	SM410046	SM415046
		18.50	.7283		SM455185	SM460185	SM465185
	47/64	18.65	.7344		SM405047	SM410047	SM415047
		19.00	.7480		SM455190	SM460190	SM465190
	3/4	19.05	.7500		SM405048	SM410048	SM415048
		19.45	.7656		SM405049	SM410049	SM415049
	49/64	19.50	.7677		SM455195	SM460195	SM465195
		25/32	19.84		.7812	SM405050	SM410050
	51/64	20.00	.7874		SM455200	SM460200	SM465200
		20.24	.7969		SM405051	SM410051	SM415051
	13/16	20.50	.8071		SM455205	SM460205	SM465205
		20.64	.8125		SM405052	SM410052	SM415052
	27/32	21.00	.8268		SM455210	SM460210	SM465210
		21.43	.8438		SM405054	SM410054	SM415054
	55/64	21.83	.8594		SM405055	SM410055	SM415055
		22.00	.8661		SM455220	SM460220	SM465220
	7/8	22.23	.8750		SM405056	SM410056	SM415056
		22.62	.8906		SM405057	SM410057	SM415057
57/64	23.00	.9055	SM455230	SM460230	SM465230		
	23.02	.9062	SM405058	SM410058	SM415058		
29/32	23.02	.9062	SM405059	SM410059	SM415059		
	23.42	.9219	SM405060	SM410060	SM415060		
59/64	23.81	.9375	SM405060	SM410060	SM415060		
	24.00	.9449	SM455240	SM460240	SM465240		

◎ : Excellent ○ : Good

ISO	P										M			K								
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	18	27	30	35	20	32	15	23	10	10	26	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	◎	○	◎	○	◎	○		

ISO	N					S										H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎							◎												


### SM-POINT SPADE DRILL INSERTS - HSS M4

- SM-POINT EINWEG BOHREINSATZ - HSS M4
- Plaquettes SPADE DRILL, pointe SM - HSS M4
- CUSPIDI, SM-POINT - HSS M4



- ▶ For general use in steels and cast irons.
- ▶ Improved stability and hole straightness by newly developed thinning design.
- ▶ Less thrust force and excellent self-centering.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Stahl und Gusseisen
- ▶ Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
- ▶ Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A375

Recommended Tool Holder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245-246	-	-
	ER COLLET CHUCK		D73-115	

Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	HSS M4		
					TiN	TiCN	TiAlN
<p style="font-size: 2em; font-weight: bold; text-align: center;">2</p> <p>Ø24.41 (.961) to Ø35.05 (1.380)</p>	31/32	24.61	.9688	4.8 (3/16)	SM405062	SM410062	SM415062
	63/64	25.00	.9843		SM455250	SM460250	SM465250
	1	25.40	1.0000		SM405100	SM410100	SM415100
	1-1/64	25.80	1.0156		SM405101	SM410101	SM415101
		26.00	1.0236		SM455260	SM460260	SM465260
	1-1/32	26.19	1.0312		SM405102	SM410102	SM415102
	1-3/64	26.59	1.0469		SM405103	SM410103	SM415103
	1-1/16	26.99	1.0625		SM405104	SM410104	SM415104
		27.00	1.0630		SM455270	SM460270	SM465270
	1-3/32	27.78	1.0938		SM405106	SM410106	SM415106
		28.00	1.1024		SM455280	SM460280	SM465280
	1-7/64	28.18	1.1094		SM405107	SM410107	SM415107
	1-1/8	28.58	1.1250		SM405108	SM410108	SM415108
		29.00	1.1417		SM455290	SM460290	SM465290
	1-5/32	29.37	1.1562		SM405110	SM410110	SM415110
		30.00	1.1811		SM455300	SM460300	SM465300
	1-3/16	30.16	1.1875		SM405112	SM410112	SM415112
	1-7/32	30.96	1.2188		SM405114	SM410114	SM415114
		31.00	1.2205		SM455310	SM460310	SM465310
	1-1/4	31.75	1.2500		SM405116	SM410116	SM415116
		32.00	1.2598		SM455320	SM460320	SM465320
	1-9/32	32.54	1.2812		SM405118	SM410118	SM415118
		33.00	1.2992		SM455330	SM460330	SM465330
	1-5/16	33.34	1.3125		SM405120	SM410120	SM415120
		34.00	1.3386		SM455340	SM460340	SM465340
	1-11/32	34.13	1.3438		SM405122	SM410122	SM415122
	1-3/8	34.93	1.3750		SM405124	SM410124	SM415124
		35.00	1.3780		SM455350	SM460350	SM465350

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○		○	○			◎	◎	◎	◎	◎	◎	○	◎	○	◎	○

ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎					◎														


**SM-POINT SPADE DRILL INSERTS - HSS M4**

- **SM-POINT EINWEG BOHREINSATZ - HSS M4**
- **Plaquettes SPADE DRILL, pointe SM - HSS M4**
- **CUSPIDI, SM-POINT - HSS M4**



- ▶ For general use in steels and cast irons.
- ▶ Improved stability and hole straightness by newly developed thinning design.
- ▶ Less thrust force and excellent self-centering.
- ▶ Any non-standard size available.

- ▶ Für allgemeine Anwendung in Stahl und Gusseisen
- ▶ Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnittsgeometrie
- ▶ Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



cutting conditions : p.A375

Recommended ToolHolder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245-246	-	-
	ER COLLET CHUCK			D73-115

Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	HSS M4		
					TiN	TiCN	TiAlN
<b>3</b> Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4062	6.4 (1/4)	SM405126	SM410126	SM415126
		36.00	1.4173		SM455360	SM460360	SM465360
	1-7/16	36.51	1.4375		SM405128	SM410128	SM415128
		37.00	1.4567		SM455370	SM460370	SM465370
	1-15/32	37.31	1.4688		SM405130	SM410130	SM415130
		38.00	1.4961		SM455380	SM460380	SM465380
	1-1/2	38.10	1.5000		SM405132	SM410132	SM415132
		1-17/32	38.89		1.5312	SM405134	SM410134
	39.00		1.5354		SM455390	SM460390	SM465390
	1-9/16	39.69	1.5625		SM405136	SM410136	SM415136
		40.00	1.5748		SM455400	SM460400	SM465400
	1-19/32	40.48	1.5938		SM405138	SM410138	SM415138
		41.00	1.6142		SM455410	SM460410	SM465410
	1-5/8	41.28	1.6250		SM405140	SM410140	SM415140
		42.00	1.6535		SM455420	SM460420	SM465420
	1-21/32	42.07	1.6562		SM405142	SM410142	SM415142
		1-11/16	42.86		1.6875	SM405144	SM410144
	43.00		1.6929		SM455430	SM460430	SM465430
	1-23/32	43.66	1.7188		SM405146	SM410146	SM415146
		44.00	1.7323		SM455440	SM460440	SM465440
1-3/4	44.45	1.7500	SM405148	SM410148	SM415148		
	45.00	1.7717	SM455450	SM460450	SM465450		
1-25/32	45.24	1.7812	SM405150	SM410150	SM415150		
	46.00	1.8110	SM455460	SM460460	SM465460		
1-13/16	46.04	1.8125	SM405152	SM410152	SM415152		
	1-27/32	46.83	1.8438	SM405154	SM410154	SM415154	
47.00		1.8504	SM455470	SM460470	SM465470		
1-7/8	47.63	1.8750	SM405156	SM410156	SM415156		

◎ : Excellent ○ : Good

ISO	P										M			K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	○	○		○	○					◎	◎	◎	◎	○	◎	○	◎	○	

ISO	N					S										H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎							◎												

SELECTION GUIDE



SERIES	1~8	Y,Z,0,1~4	Y,Z,0,1,2
TOOL MATERIAL	HSS M4	SUPER HSS T15	PREMIUM HSS M48
POINT	STANDARD	STANDARD	STANDARD
SIZE MIN	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)
SIZE MAX	Ø114.3(#8)	Ø65.09(#4)	Ø35(#2)
PAGE	A286	A292	A297



Please visit [globalyg1.com/mat](http://globalyg1.com/mat) for material search

SURFACE TREATMENT

TiN / TiCN / TiAIN

# INSERTS & HOLDERS SPADE DRILLS

For General Machines and Drilling Large Diameters  
Longer Tool Life and High Productivity

⊙ : Excellent ○ : Good

Recommended cutting conditions : p.A375



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc				
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	⊙	⊙	
	2		About 0.45% C Annealed	190	13	○	⊙	⊙	
	3		About 0.45% C Quenched & Tempered	250	25	○	⊙	⊙	
	4		About 0.75% C Annealed	270	28	○	⊙	⊙	
	5		About 0.75% C Quenched & Tempered	300	32				
	6	Low alloy steel	Annealed	180	10	○	⊙	⊙	
	7		Quenched & Tempered	275	29	○	⊙	⊙	
	8		Quenched & Tempered	300	32		○	⊙	
	9		Quenched & Tempered	350	38		○	⊙	
	10		High alloyed steel, and tool steel	Annealed	200	15		○	⊙
	11			Quenched & Tempered	325	35		○	⊙
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	⊙	○		
	13		Martensitic Quenched & Tempered	240	23	⊙	○		
	14		Austenitic	180	10	⊙	○		
K	15	Grey cast iron	Pearlitic / ferritic	180	10	⊙	○	○	
	16		Pearlitic (Martensitic)	260	26	○	⊙	⊙	
	17	Nodular cast iron	Ferritic	160	3	⊙	○	○	
	18		Pearlitic	250	25	○	⊙	⊙	
	19		Ferritic	130		⊙	○	○	
20	Malleable cast iron	Pearlitic	230	21	○	⊙	⊙		
N	21	Aluminum-wrought alloy	Not Curable	60		⊙	○	○	
	22		Curable Hardened	100		⊙	○	○	
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26		Copper and Copper Alloys	Cutting Alloys, PB>1%	110				
	27	Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90		⊙	○	○	
	28		CuSn, lead-free copper and electrolytic copper	100					
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic					
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		⊙	⊙	
	32		Cured	280	30		○	⊙	
	33		Annealed	250	25		○	⊙	
	34		Ni or Co Based Cured	350	38		○	⊙	
	35	Cast	320	34		○	⊙		
	36	Titanium Alloys	Pure Titanium	400 Rm					
	37		Alpha + Beta Alloys Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55		○	⊙	
	39		Hardened	630	60				
	40	Chilled Cast Iron	Cast	400	42				
	41	Hardened Cast Iron	Hardened	550	55				

REAMERS	<b>TAPER SHANK</b>		TAPER SHANK HOLDERS - INCH/METRIC	A364
COUNTER SINKS	<b>FLANGED SHANK</b>		FLANGED STRAIGHT SHANK HOLDERS - INCH/METRIC	A364
COUNTER BORES	<b>STRAIGHT SHANK</b>		STRAIGHT SHANK HOLDERS - INCH	A382

Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	1~3	Y,Z,0,1~3	Y,Z,0,1,2	Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	Y,Z,0,1,2
CARBIDE K10	CARBIDE K20	CARBIDE P40	HSS M4	SUPER HSS T15	PREMIUM HSS M48	CARBIDE K10	CARBIDE K20	CARBIDE P40	SUPER COBALT T15

STANDARD	STANDARD	STANDARD	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	FALT BOTTOM
----------	----------	----------	----------	----------	----------	----------	----------	----------	-------------

Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)
----------	----------	----------	------------	----------	----------	----------	----------	----------	----------

Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)	Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)
---------	------------	------------	------------	------------	---------	---------	------------	------------	---------

A300	A303	A307	A312	A315	A319	A322	A325	A329	A361
------	------	------	------	------	------	------	------	------	------

TiN / TiCN / TiAIN									TiN / Hardslick / TiAIN
--------------------	--	--	--	--	--	--	--	--	-------------------------



										1	DREAM DRILLS - FLAT BOTTOM
										2	DREAM DRILLS - INOX
										3	DREAM DRILLS - MQL
										4	DREAM DRILLS - ALU
										5	DREAM DRILLS - GENERAL CARBIDE DRILLS
										6	DREAM DRILLS - HPD DRILLS
										7	DREAM DRILLS - GOLD-P DRILLS
										8	DREAM DRILLS - SUPER-GP DRILLS
										9	DREAM DRILLS - STRAIGHT SHANK DRILLS
										10	DREAM DRILLS - TAPER SHANK DRILLS
										11	DREAM DRILLS - NC-SPOTTING DRILLS
										12	DREAM DRILLS - CENTER DRILLS
										13	DREAM DRILLS - SPADE DRILLS
										14	DREAM DRILLS - REAMERS
										15	DREAM DRILLS - COUNTER SINKS
										16	DREAM DRILLS - COUNTER BORES
										17	DREAM DRILLS - TECHNICAL DATA
										18	DREAM DRILLS - TECHNICAL DATA
										19	DREAM DRILLS - TECHNICAL DATA
										20	DREAM DRILLS - TECHNICAL DATA
										21	DREAM DRILLS - TECHNICAL DATA
										22	DREAM DRILLS - TECHNICAL DATA
										23	DREAM DRILLS - TECHNICAL DATA
										24	DREAM DRILLS - TECHNICAL DATA
										25	DREAM DRILLS - TECHNICAL DATA
										26	DREAM DRILLS - TECHNICAL DATA
										27	DREAM DRILLS - TECHNICAL DATA
										28	DREAM DRILLS - TECHNICAL DATA
										29	DREAM DRILLS - TECHNICAL DATA
										30	DREAM DRILLS - TECHNICAL DATA
										31	DREAM DRILLS - TECHNICAL DATA
										32	DREAM DRILLS - TECHNICAL DATA
										33	DREAM DRILLS - TECHNICAL DATA
										34	DREAM DRILLS - TECHNICAL DATA
										35	DREAM DRILLS - TECHNICAL DATA
										36	DREAM DRILLS - TECHNICAL DATA
										37	DREAM DRILLS - TECHNICAL DATA
										38	DREAM DRILLS - TECHNICAL DATA
										39	DREAM DRILLS - TECHNICAL DATA
										40	DREAM DRILLS - TECHNICAL DATA
										41	DREAM DRILLS - TECHNICAL DATA

Coating	Characteristics	Coating	Characteristics
<b>H</b>	-First choice for excellent wear resistance and toughness -Preventive of chipping due to cold welding -Achieve high penetration rates even in deep holes with reliable tool life -Coefficient of friction against steel : 0.25 -Color : Bronze	<b>TiCN</b>	-Maximum working temperature up to 400°C -Better wear resistance over non-coating -Coefficient of friction against steel : 0.4 -Color : Blue-Grey
		<b>TiAIN</b>	-Maximum working temperature up to 800°C -Excellent heat and oxidation resistance -Coefficient of friction against steel : 0.4 -Color : Violet-Grey
<b>TiN</b>	-Increased tool life over non-coating -Improved wear resistance and high hardness -For normal applications -Coefficient of friction against steel : 0.4 -Color : Gold	<b>Hardslick</b>	-Better chip evauation for tapping and drilling -High hardness and improved lubrication -Coefficient of friction against steel : 0.2 -Color : Black-Gery

**HSS**

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -PRO

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC- SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS


COUNTER BORES

TECHNICAL DATA

# PRODUCT FEATURES


## SPADE DRILLS (Standard, SM-Point)

Reference page : p.A299 - p.A380



### Standard-Point

Standard Point  
and Neutral Rake Angle for  
**Stable Cutting**  
**Self Centering**  
**Chip Breaking**  
**Rigidity on Center**




### SM-Point

Multiple Web Thinning for and Radius Back Face  
for Increased Cutting Speed and Feed  
**Wide Chip Space**  
**Good Self-Centering**  
**Less Tool Lead-off**  
**Reduction in bell mouching**



Multi Layers

Carbide

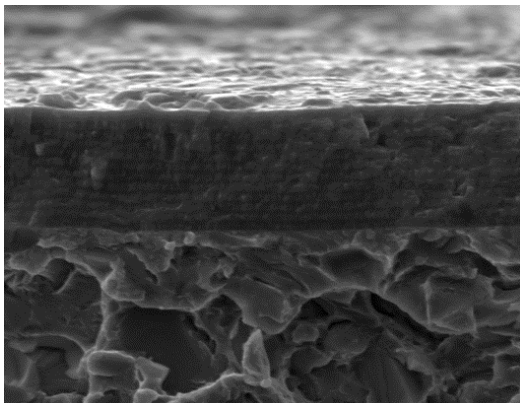

### Multi layered 'H'-coating Micro Grain Carbide Insert

Outstanding Productivity & Reliability

#### H - Coating

(Upgraded AlCrN-Based : **Multi-Layer coating**)

- Higher worn-out resistance and Lower friction
- Higher Cutting Speed and Feed
- Improved drill Hole Quality



# Special features of SM-Point Spade Drill

This new "Hybrid Point" combines the strength of the standard point with additional "Web Thinning".


This new point increases stability, reduces thrust, improves centering and allows increased speeds and feeds.

**Multiple thinning form at the bottom of the large thinning.**

- ▶ The optimum thinning for the difference from the cutting speed, the cutting quantity and the cutting load according to the distance from the drill point to the cutting edge.


**Radius back face**

- ▶ Wide chip space

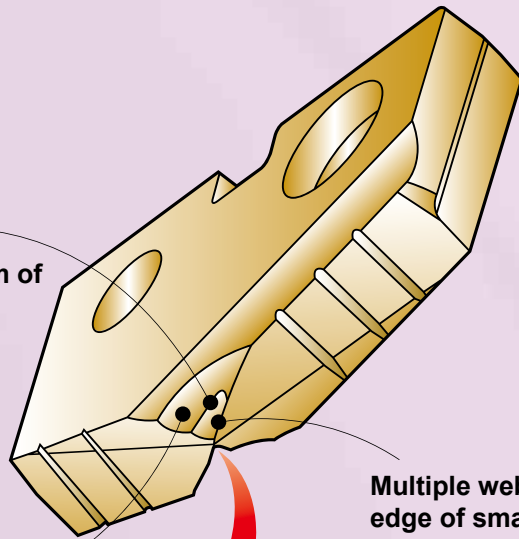


**Multiple web thinning with the cutting edge of small web thinning.**

- ▶ Good self-centering
- ▶ Less tool lead off
- ▶ Reduction in bell mouching, thrust
- ▶ Increased stability




**Four-facet point**

- ▶ Self-centering
- ▶ Less thrust force

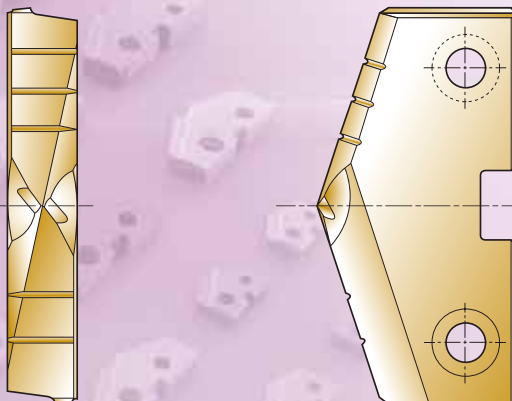

**HOLDER ACCESSORIES**  
**ROTARY COOLANT ADAPTER (RCA) AND ACCESSORIES**

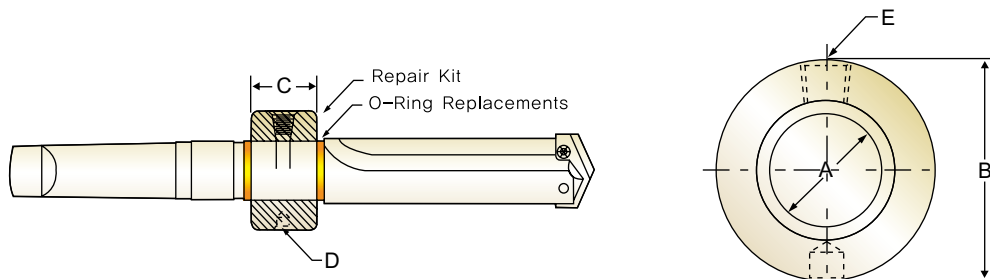

**Inch**

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR110048	3/4	1-3/4	7/8	5/16-NC	◆1/8	PR210048	PR310048
PR110100	1	2-1/8	1-1/8	5/16-NC	◆1/8	PR210100	PR310100
PR110116	1-1/4	2-1/2	1-3/8	3/8-NC	◆1/4	PR210116	PR310116
PR110148	1-3/4	3	1-3/8	3/8-NC	◆1/4	PR210148	PR310148
PR110216	2-1/4	3-3/4	1-3/4	1/2-NC	◆1/2	PR210216	PR310216

**Metric**

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR120190	19.05	44.45	22.23	M8 × 1.25	◆1/8	PR220190	PR320190
PR120254	25.40	53.97	28.57	M8 × 1.25	◆1/8	PR220254	PR320254
PR120317	31.75	63.50	34.92	M10 × 1.5	◆1/4	PR220317	PR320317
PR120444	44.45	76.20	34.92	M10 × 1.5	◆1/4	PR220444	PR320444
PR120571	57.15	95.27	44.45	M12 × 1.75	◆1/2	PR220571	PR320571

◆ Thread to BSP & ISO 7-1

**TORX SCREWS**

Holder Series	Item No.	TORX Hand Driver	Drill Range Used With	
			Inch	Metric
Y	J07Y0010	J05Y0070	3/8 ~ 27/64	9.5 mm ~ 11.0 mm
Z	J07Z0110		7/16 ~ 1/2	11.5 mm ~ 12.5 mm
0	J0800210	J0500080	33/64 ~ 11/16	13.0 mm ~ 17.5 mm
0.5	J0805310		39/64 ~ 11/16	15.5 mm ~ 17.5 mm
1	J0910410	J0510090	45/64 ~ 15/16	18.0 mm ~ 24.0 mm
1.5	J0915510		55/64 ~ 15/16	22.0 mm ~ 24.0 mm
2	J1520610	J0520150	31/32 ~ 1-3/8	25.0 mm ~ 35.0 mm
2.5	J1525710		1-3/16 ~ 1-3/8	30.0 mm ~ 35.0 mm
3,4	J2030810		1-13/32 ~ 2-9/16	36.0 mm ~ 65.0 mm
5 ~ 8	J2550910	J0550250	2-1/2 ~ 4-1/2	64.0 mm ~ 114.0 mm

\*\* Note : Replacement screws sold in packages(10 screws per package)



**SPADE DRILL HSS-M4**

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
<b>P</b>	1	Non-alloy steel	<b>54</b>	<b>67</b>	<b>75</b>	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		<b>49</b>	<b>58</b>	<b>69</b>	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		<b>45</b>	<b>56</b>	<b>63</b>	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		<b>45</b>	<b>56</b>	<b>63</b>	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	6	Low alloy steel	<b>45</b>	<b>56</b>	<b>58</b>	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		<b>41</b>	<b>50</b>	<b>56</b>	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	<b>M</b>	12	Stainless steel	<b>20</b>	<b>23</b>	<b>29</b>	0.12	0.18	0.20	0.24	0.30	0.36
13		<b>20</b>		<b>23</b>	<b>29</b>	0.12	0.18	0.20	0.24	0.30	0.36	0.46
14		<b>24</b>		<b>29</b>	<b>34</b>	0.14	0.20	0.23	0.26	0.36	0.41	0.50
<b>K</b>	15	Grey cast iron	<b>48</b>	<b>58</b>	<b>70</b>	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	16		<b>29</b>	<b>35</b>	<b>41</b>	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	<b>48</b>	<b>58</b>	<b>70</b>	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	18		<b>35</b>	<b>44</b>	<b>52</b>	0.13	0.17	0.23	0.3	0.35	0.43	0.50
	19	Malleable cast iron	<b>52</b>	<b>64</b>	<b>75</b>	0.16	0.30	0.40	0.49	0.59	0.69	0.75
	20		<b>35</b>	<b>44</b>	<b>52</b>	0.13	0.17	0.23	0.30	0.35	0.43	0.50
<b>N</b>	21	Aluminum-wrought alloy	<b>187</b>	<b>229</b>	<b>244</b>	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		<b>92</b>	<b>137</b>	<b>137</b>	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	27	Copper and Copper Alloys (Bronze / Brass)	<b>95</b>	<b>128</b>	<b>142</b>	0.19	0.31	0.43	0.53	0.64	0.74	0.79

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -PRO

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA