


SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20

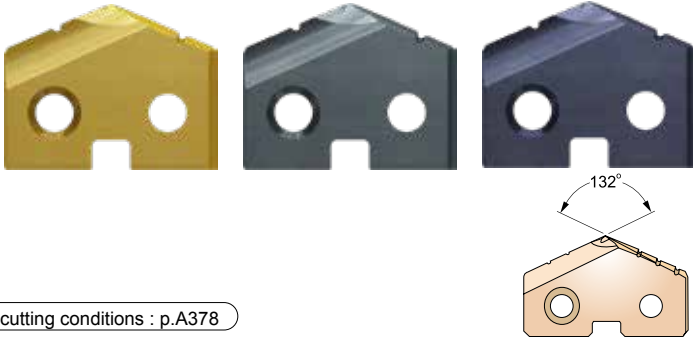

cutting conditions : p.A378

- ▶ High performance on Gray cast iron over 220 Brinell, malleable cast iron with short chips, silicon aluminum and copper alloys.
- ▶ Improved stability and hole straightness by newly developed thinning design.
- ▶ Less thrust force and excellent self-centering.
- ▶ Any non-standard size available.
- ▶ Beste Leistung in Grauguss über 220 Brinell, kurzspanendem Kugelgraphitguss, Si-Aluminium und Kupferlegierungen
- ▶ Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnidengeometrie
- ▶ Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar

Recommended ToolHolder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245-246	-	-
	ER COLLET CHUCK		D73-115	

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.			
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20			
					TiN	TiCN	TiAlN	
Y Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	2.4 (3/32)	SM755095	SM760095	SM765095	
		9.53	.3750		SM705024	SM710024	SM715024	
	25/64	9.80	.3858		SM755098	SM760098	SM765098	
		9.92	.3906		SM705025	SM710025	SM715025	
	13/32	10.00	.3937		SM755100	SM760100	SM765100	
		10.20	.4016		SM755102	SM760102	SM765102	
		10.32	.4062		SM705026	SM710026	SM715026	
		10.50	.4134		SM755105	SM760105	SM765105	
		27/64	10.72		.4219	SM705027	SM710027	SM715027
		10.80	.4252		SM755108	SM760108	SM765108	
Z Ø11.11(.437) to Ø12.95(.510)	7/16	11.00	.4331	2.4 (3/32)	SM755110	SM760110	SM765110	
		11.11	.4375		SM705028	SM710028	SM715028	
	11.50	.4528	SM755115		SM760115	SM765115		
	29/64	11.51	.4531		SM705029	SM710029	SM715029	
	15/32	11.91	.4688		SM705030	SM710030	SM715030	
	12.00	.4724	SM755120		SM760120	SM765120		
	31/64	12.30	.4844		SM705031	SM710031	SM715031	
	12.50	.4921	SM755125		SM760125	SM765125		
	1/2	12.70	.5000		SM705032	SM710032	SM715032	
	0 Ø12.98 (.511) to Ø17.65 (.695)	33/64	13.00		.5118	3.2 (1/8)	SM755130	SM760130
13.10			.5156	SM705033	SM710033		SM715033	
17/32		13.49	.5312	SM705034	SM710034		SM715034	
13.50		.5315	SM755135	SM760135	SM765135			
35/64		13.89	.5469	SM705035	SM710035		SM715035	
14.00		.5512	SM755140	SM760140	SM765140			
9/16		14.29	.5625	SM705036	SM710036		SM715036	
14.50		.5709	SM755145	SM760145	SM765145			
37/64		14.68	.5781	SM705037	SM710037		SM715037	
15.00		.5906	SM755150	SM760150	SM765150			
19/32		15.08	.5938	SM705038	SM710038		SM715038	
39/64		15.48	.6094	SM705039	SM710039		SM715039	
15.50		.6102	SM755155	SM760155	SM765155			
5/8		15.88	.6250	SM705040	SM710040		SM715040	
16.00	.6299	SM755160	SM760160	SM765160				


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○	

ISO Material Description	N					S					H										
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎					◎				◎	◎	◎	◎	◎			○			

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20



- ▶ For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- ▶ Improved stability and hole straightness by newly developed thinning design.
- ▶ Less thrust force and excellent self-centering.
- ▶ Any non-standard size available.
- ▶ Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- ▶ Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnitengeometrie
- ▶ Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar

cutting conditions : p.A378

Recommended ToolHolder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245-246	-	-
		ER COLLET CHUCK		D73-115

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
0 Ø12.98(.511) to Ø17.65(.695)	41/64	16.27	.6406	3.2 (1/8)	SM705041	SM710041	SM715041
		16.50	.6496		SM755165	SM760165	SM765165
	21/32	16.67	.6562		SM705042	SM710042	SM715042
		17.00	.6693		SM755170	SM760170	SM765170
	43/64	17.07	.6719		SM705043	SM710043	SM715043
	11/16	17.46	.6875		SM705044	SM710044	SM715044
		17.50	.6890		SM755175	SM760175	SM765175
	45/64	17.86	.7031		SM705045	SM710045	SM715045
		18.00	.7087		SM755180	SM760180	SM765180
		23/32	18.26		.7188	SM705046	SM710046
1 Ø17.53 (.690) to Ø24.38 (.960)		18.50	.7283	4.0 (5/32)	SM755185	SM760185	SM765185
	47/64	18.65	.7344		SM705047	SM710047	SM715047
		19.00	.7480		SM755190	SM760190	SM765190
	3/4	19.05	.7500		SM705048	SM710048	SM715048
	49/64	19.45	.7656		SM705049	SM710049	SM715049
		19.50	.7677		SM755195	SM760195	SM765195
	25/32	19.84	.7812		SM705050	SM710050	SM715050
		20.00	.7874		SM755200	SM760200	SM765200
	51/64	20.24	.7969		SM705051	SM710051	SM715051
		20.50	.8071		SM755205	SM760205	SM765205
	13/16	20.64	.8125		SM705052	SM710052	SM715052
		21.00	.8268		SM755210	SM760210	SM765210
	27/32	21.43	.8438		SM705054	SM710054	SM715054
	55/64	21.83	.8594		SM705055	SM710055	SM715055
		22.00	.8661		SM755220	SM760220	SM765220
	7/8	22.23	.8750		SM705056	SM710056	SM715056
	57/64	22.62	.8906		SM705057	SM710057	SM715057
		23.00	.9055		SM755230	SM760230	SM765230
29/32	23.02	.9062	SM705058	SM710058	SM715058		
59/64	23.42	.9219	SM705059	SM710059	SM715059		
15/16	23.81	.9375	SM705060	SM710060	SM715060		
	24.00	.9449	SM755240	SM760240	SM765240		


◎ : Excellent ○ : Good

ISO	P										M				K									
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRc	13	25	28	32	36	10	29	32	38	42	48	15	23	30	10	26	3	25	10	21				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○				

ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎					◎				◎	◎	◎	◎	◎			◎			

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20
- Plaquettes SPADE DRILL, pointe SM - Carbure K20
- CUSPIDI SM-POINT - MD K20



cutting conditions : p.A378

- ▶ For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- ▶ Improved stability and hole straightness by newly developed thinning design.
- ▶ Less thrust force and excellent self-centering.
- ▶ Any non-standard size available.
- ▶ Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- ▶ Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnitengeometrie
- ▶ Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar

Recommended Tool Holder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245 - 246	-	-
	ER COLLET CHUCK		D73 - 115	

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		CARBIDE K20		
					TiN	TiCN	TiAlN
<p style="font-size: 2em; font-weight: bold; text-align: center;">2</p> <p>Ø24.41 (.961) to Ø35.05 (1.380)</p>	31/32	24.61	.9688	4.8 (3/16)	SM705062	SM710062	SM715062
	63/64	25.00	.9843		SM755250	SM760250	SM765250
	1	25.40	1.0000		SM705100	SM710100	SM715100
	1-1/64	25.80	1.0156		SM705101	SM710101	SM715101
		26.00	1.0236		SM755260	SM760260	SM765260
	1-1/32	26.19	1.0312		SM705102	SM710102	SM715102
	1-3/64	26.59	1.0469		SM705103	SM710103	SM715103
	1-1/16	26.99	1.0625		SM705104	SM710104	SM715104
		27.00	1.0630		SM755270	SM760270	SM765270
	1-3/32	27.78	1.0938		SM705106	SM710106	SM715106
		28.00	1.1024		SM755280	SM760280	SM765280
	1-7/64	28.18	1.1094		SM705107	SM710107	SM715107
	1-1/8	28.58	1.1250		SM705108	SM710108	SM715108
		29.00	1.1417		SM755290	SM760290	SM765290
	1-5/32	29.37	1.1562		SM705110	SM710110	SM715110
		30.00	1.1811		SM755300	SM760300	SM765300
	1-3/16	30.16	1.1875		SM705112	SM710112	SM715112
	1-7/32	30.96	1.2188		SM705114	SM710114	SM715114
		31.00	1.2205		SM755310	SM760310	SM765310
	1-1/4	31.75	1.2500		SM705116	SM710116	SM715116
		32.00	1.2598		SM755320	SM760320	SM765320
	1-9/32	32.54	1.2812		SM705118	SM710118	SM715118
		33.00	1.2992		SM755330	SM760330	SM765330
	1-5/16	33.34	1.3125		SM705120	SM710120	SM715120
		34.00	1.3386		SM755340	SM760340	SM765340
	1-11/32	34.13	1.3438		SM705122	SM710122	SM715122
	1-3/8	34.93	1.3750		SM705124	SM710124	SM715124
		35.00	1.3780		SM755350	SM760350	SM765350


◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc																				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N					S										H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎					◎				◎	◎	◎	◎	◎			○			

SM-POINT SPADE DRILL INSERTS - CARBIDE K20

- **SM-POINT EINWEG BOHREINSATZ - VOLLHARTMETALL K20**
- **Plaquettes SPADE DRILL, pointe SM - Carbure K20**
- **CUSPIDI SM-POINT - MD K20**



cutting conditions : p.A378

- ▶ For use in Gray cast iron up to 220 Brinell, nonferrous metals, copper, brass and aluminum.
- ▶ Improved stability and hole straightness by newly developed thinning design.
- ▶ Less thrust force and excellent self-centering.
- ▶ Any non-standard size available.
- ▶ Zur Anwendung in Grauguss bis 220 Brinell, Nichteisen - Metallen, Kupfer, Messing und Aluminium
- ▶ Erhöhte Stabilität und Fluchtgenauigkeit durch neu entwickelte Querschnitengeometrie
- ▶ Verminderte Bohrkraft und ausgezeichnete Selbstzentrierung
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar

Recommended Tool Holder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245-246	-	-
	ER COLLET CHUCK			D73-115

Series Min. to Max. mm (inch)	Diameter			Thick	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)	Metric (mm, inch)	CARBIDE K20		
					TiN	TiCN	TiAlN
3 Ø34.37 (1.353) to Ø47.80 (1.882)	1-13/32	35.72	1.4062	6.4 (1/4)	SM705126	SM710126	SM715126
		36.00	1.4173		SM755360	SM760360	SM765360
		1-7/16	36.51		1.4375	SM705128	SM710128
	37.00		1.4567		SM755370	SM760370	SM765370
	1-15/32	37.31	1.4688		SM705130	SM710130	SM715130
		38.00	1.4961		SM755380	SM760380	SM765380
	1-1/2	38.10	1.5000		SM705132	SM710132	SM715132
		1-17/32	38.89		1.5312	SM705134	SM710134
	39.00		1.5354		SM755390	SM760390	SM765390
	1-9/16	39.69	1.5625		SM705136	SM710136	SM715136
		40.00	1.5748		SM755400	SM760400	SM765400
	1-19/32	40.48	1.5938		SM705138	SM710138	SM715138
		41.00	1.6142		SM755410	SM760410	SM765410
	1-5/8	41.28	1.6250		SM705140	SM710140	SM715140
		42.00	1.6535		SM755420	SM760420	SM765420
	1-21/32	42.07	1.6562		SM705142	SM710142	SM715142
		1-11/16	42.86		1.6875	SM705144	SM710144
	43.00		1.6929		SM755430	SM760430	SM765430
	1-23/32	43.66	1.7188		SM705146	SM710146	SM715146
		44.00	1.7323		SM755440	SM760440	SM765440
	1-3/4	44.45	1.7500		SM705148	SM710148	SM715148
		45.00	1.7717		SM755450	SM760450	SM765450
	1-25/32	45.24	1.7812		SM705150	SM710150	SM715150
		46.00	1.8110		SM755460	SM760460	SM765460
1-13/16	46.04	1.8125	SM705152	SM710152	SM715152		
	1-27/32	46.83	1.8438	SM705154	SM710154	SM715154	
47.00		1.8504	SM755470	SM760470	SM765470		
1-7/8	47.63	1.8750	SM705156	SM710156	SM715156		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○

ISO Material Description	N					S										H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	◎	◎					◎				◎	◎	◎	◎	◎			◎			

SELECTION GUIDE



SERIES	1~8	Y,Z,0,1~4	Y,Z,0,1,2
TOOL MATERIAL	HSS M4	SUPER HSS T15	PREMIUM HSS M48
POINT	STANDARD	STANDARD	STANDARD
SIZE MIN	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)
SIZE MAX	Ø114.3(#8)	Ø65.09(#4)	Ø35(#2)
PAGE	A286	A292	A297

Please visit globalyg1.com/mat for material search

SURFACE TREATMENT

TiN / TiCN / TiAlN

INSERTS & HOLDERS SPADE DRILLS

For General Machines and Drilling Large Diameters
Longer Tool Life and High Productivity

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A375



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	◎	◎
	2		About 0.45% C Annealed	190	13	○	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	○	◎	◎
	4		About 0.75% C Annealed	270	28	○	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	○	◎	◎
	7		Quenched & Tempered	275	29	○	◎	◎
	8		Quenched & Tempered	300	32		○	◎
	9		Quenched & Tempered	350	38		○	◎
	10		High alloyed steel, and tool steel	Annealed	200	15		○
	11	Quenched & Tempered		325	35		○	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	○	
	13		Martensitic Quenched & Tempered	240	23	◎	○	
	14		Austenitic	180	10	◎	○	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	○	○
	16		Pearlitic (Martensitic)	260	26	○	◎	◎
	17	Nodular cast iron	Ferritic	160	3	◎	○	○
	18		Pearlitic	250	25	○	◎	◎
	19		Ferritic	130		◎	○	○
20	Malleable cast iron	Pearlitic	230	21	○	◎	◎	
N	21	Aluminum-wrought alloy	Not Curable	60		◎	○	○
	22		Curable Hardened	100		◎	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75				
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26		Copper and Copper Alloys	Cutting Alloys, PB>1%	110			
	27	(Bronze / Brass)	CuZn, CuSnZn (Brass)	90		◎	○	○
	28		CuSn, lead-free copper and electrolytic copper	100				
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30	Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		◎	◎
	32		Cured	280	30		○	◎
	33		Annealed	250	25		○	◎
	34		Ni or Co Based Cured	350	38		○	◎
	35	Cast	320	34		○	◎	
	36	Titanium Alloys	Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55		○	◎
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			

REAMERS	TAPER SHANK		TAPER SHANK HOLDERS - INCH/METRIC	A364
COUNTER SINKS	FLANGED SHANK		FLANGED STRAIGHT SHANK HOLDERS - INCH/METRIC	A364
COUNTER BORES	STRAIGHT SHANK		STRAIGHT SHANK HOLDERS - INCH	A382

YZ,0,1,2	YZ,0,1~3	YZ,0,1~3	1~3	YZ,0,1~3	YZ,0,1,2	YZ,0,1,2	YZ,0,1~3	YZ,0,1~3	YZ,0,1,2
CARBIDE K10	CARBIDE K20	CARBIDE P40	HSS M4	SUPER HSS T15	PREMIUM HSS M48	CARBIDE K10	CARBIDE K20	CARBIDE P40	SUPER COBALT T15
STANDARD	STANDARD	STANDARD	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	FALT BOTTOM
Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)
Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)	Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)
A300	A303	A307	A312	A315	A319	A322	A325	A329	A361

TiN / TiCN / TiAlN



										1	DREAM DRILLS -FLAT BOTTOM
										2	DREAM DRILLS -INOX
										3	DREAM DRILLS -ML
										4	DREAM DRILLS -ML
										5	DREAM DRILLS -ML
										6	DREAM DRILLS -ALU
										7	DREAM DRILLS -ML
										8	DREAM DRILLS -ML
										9	DREAM DRILLS -ML
										10	DREAM DRILLS -ML
										11	DREAM DRILLS for HIGH HARDENED STEELS
										12	DREAM DRILLS for HIGH HARDENED STEELS
										13	DREAM DRILLS for HIGH HARDENED STEELS
										14	DREAM DRILLS for HIGH HARDENED STEELS
										15	GENERAL CARBIDE DRILLS
										16	GENERAL CARBIDE DRILLS
										17	MULTI-1 DRILLS
										18	MULTI-1 DRILLS
										19	MULTI-1 DRILLS
										20	MULTI-1 DRILLS
										21	HPD DRILLS
										22	HPD DRILLS
										23	HPD DRILLS
										24	HPD DRILLS
										25	HPD DRILLS
										26	HPD DRILLS
										27	HPD DRILLS
										28	HPD DRILLS
										29	HPD DRILLS
										30	HPD DRILLS
										31	HPD DRILLS
										32	HPD DRILLS
										33	HPD DRILLS
										34	HPD DRILLS
										35	HPD DRILLS
										36	HPD DRILLS
										37	HPD DRILLS
										38	HPD DRILLS
										39	HPD DRILLS
										40	HPD DRILLS
										41	HPD DRILLS

Coating	Characteristics
H	<ul style="list-style-type: none"> -First choice for excellent wear resistance and toughness -Preventive of chipping due to cold welding -Achieve high penetration rates even in deep holes with reliable tool life -Coefficient of friction against steel : 0.25 -Color : Bronze
TiN	<ul style="list-style-type: none"> -Increased tool life over non-coating -Improved wear resistance and high hardness -For normal applications -Coefficient of friction against steel : 0.4 -Color : Gold

Coating	Characteristics
TiCN	<ul style="list-style-type: none"> -Maximum working temperature up to 400°C -Better wear resistance over non-coating -Coefficient of friction against steel : 0.4 -Color : Blue-Grey
TiAlN	<ul style="list-style-type: none"> -Maximum working temperature up to 800°C -Excellent heat and oxidation resistance -Coefficient of friction against steel : 0.4 -Color : Violet-Grey
Hardslick	<ul style="list-style-type: none"> -Better chip evacuation for tapping and drilling -High hardness and improved lubrication -Coefficient of friction against steel : 0.2 -Color : Black-Gery

HSS

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -PRO

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -ML

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS


COUNTER BORES

TECHNICAL DATA

PRODUCT FEATURES


SPADE DRILLS (Standard, SM-Point)

Reference page : p.A299 - p.A380



Standard-Point

Standard Point
and Neutral Rake Angle for
Stable Cutting
Self Centering
Chip Breaking
Rigidity on Center




SM-Point

Multiple Web Thinning for and Radius Back Face
for Increased Cutting Speed and Feed
Wide Chip Space
Good Self-Centering
Less Tool Lead-off
Reduction in bell mouching



Multi Layers

Carbide

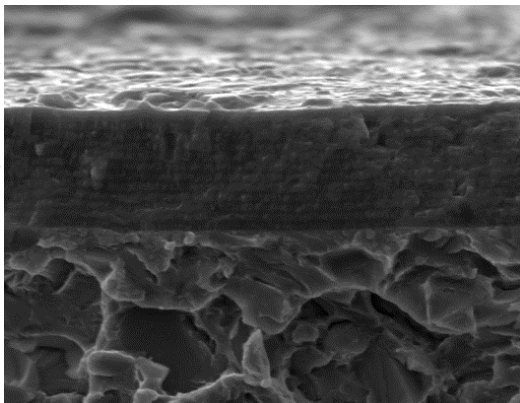

Multi layered 'H'-coating Micro Grain Carbide Insert

Outstanding Productivity & Reliability

H - Coating

(Upgraded AlCrN-Based : **Multi-Layer coating**)

- Higher worn-out resistance and Lower friction
- Higher Cutting Speed and Feed
- Improved drill Hole Quality



Special features of SM-Point Spade Drill

This new "Hybrid Point" combines the strength of the standard point with additional "Web Thinning".


This new point increases stability, reduces thrust, improves centering and allows increased speeds and feeds.

Multiple thinning form at the bottom of the large thinning.

- ▶ The optimum thinning for the difference from the cutting speed, the cutting quantity and the cutting load according to the distance from the drill point to the cutting edge.


Radius back face

- ▶ Wide chip space

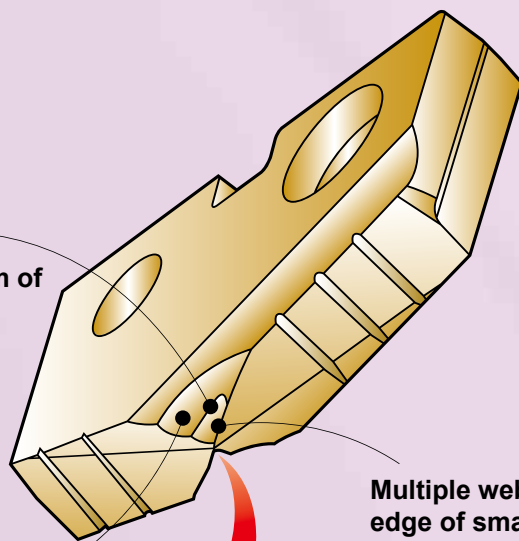


Multiple web thinning with the cutting edge of small web thinning.

- ▶ Good self-centering
- ▶ Less tool lead off
- ▶ Reduction in bell mouching, thrust
- ▶ Increased stability




Four-facet point

- ▶ Self-centering
- ▶ Less thrust force

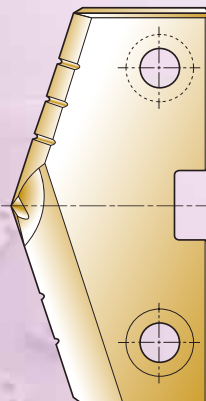

HOLDER ACCESSORIES
ROTARY COOLANT ADAPTER (RCA) AND ACCESSORIES

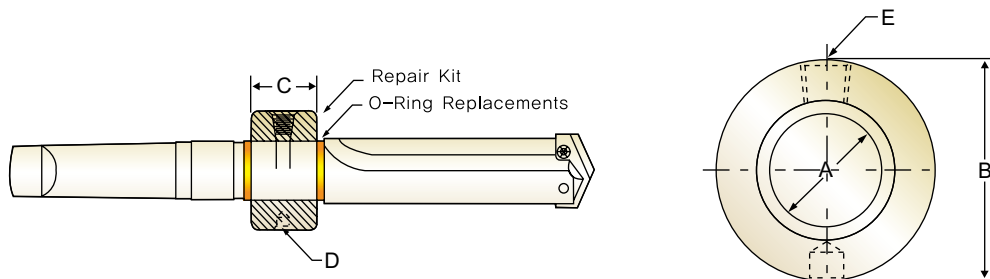

Inch

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR110048	3/4	1-3/4	7/8	5/16-NC	◆1/8	PR210048	PR310048
PR110100	1	2-1/8	1-1/8	5/16-NC	◆1/8	PR210100	PR310100
PR110116	1-1/4	2-1/2	1-3/8	3/8-NC	◆1/4	PR210116	PR310116
PR110148	1-3/4	3	1-3/8	3/8-NC	◆1/4	PR210148	PR310148
PR110216	2-1/4	3-3/4	1-3/4	1/2-NC	◆1/2	PR210216	PR310216

Metric

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR120190	19.05	44.45	22.23	M8 × 1.25	◆1/8	PR220190	PR320190
PR120254	25.40	53.97	28.57	M8 × 1.25	◆1/8	PR220254	PR320254
PR120317	31.75	63.50	34.92	M10 × 1.5	◆1/4	PR220317	PR320317
PR120444	44.45	76.20	34.92	M10 × 1.5	◆1/4	PR220444	PR320444
PR120571	57.15	95.27	44.45	M12 × 1.75	◆1/2	PR220571	PR320571

◆ Thread to BSP & ISO 7-1

TORX SCREWS

Holder Series	Item No.	TORX Hand Driver	Drill Range Used With	
			Inch	Metric
Y	J07Y0010	J05Y0070	3/8 ~ 27/64	9.5 mm ~ 11.0 mm
Z	J07Z0110		7/16 ~ 1/2	11.5 mm ~ 12.5 mm
0	J0800210	J0500080	33/64 ~ 11/16	13.0 mm ~ 17.5 mm
0.5	J0805310		39/64 ~ 11/16	15.5 mm ~ 17.5 mm
1	J0910410	J0510090	45/64 ~ 15/16	18.0 mm ~ 24.0 mm
1.5	J0915510		55/64 ~ 15/16	22.0 mm ~ 24.0 mm
2	J1520610	J0520150	31/32 ~ 1-3/8	25.0 mm ~ 35.0 mm
2.5	J1525710		1-3/16 ~ 1-3/8	30.0 mm ~ 35.0 mm
3,4	J2030810	J0530200	1-13/32 ~ 2-9/16	36.0 mm ~ 65.0 mm
5 ~ 8	J2550910	J0550250	2-1/2 ~ 4-1/2	64.0 mm ~ 114.0 mm

** Note : Replacement screws sold in packages(10 screws per package)



SPADE DRILL CARBIDE-K10

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)				
			TiN	TiCN	TiAlN	Ø9.5~12.5	Ø13~17.5	Ø18~24	Ø25~35	Ø36~47
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	16		56	70	79	0.13	0.18	0.23	0.28	0.33
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	18		66	81	93	0.13	0.15	0.28	0.33	0.37
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56
	20		66	81	93	0.13	0.15	0.28	0.33	0.37

SPADE DRILL CARBIDE-K20

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)					
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	
P	1	Non-alloy steel	94	110	119	0.20	0.24	0.31	0.42	0.46	
	2		76	82	96	0.15	0.22	0.29	0.36	0.40	
	3		66	70	84	0.15	0.22	0.28	0.36	0.40	
	4		66	70	84	0.15	0.22	0.28	0.36	0.40	
	6	Low alloy steel	73	81	88	0.15	0.23	0.29	0.38	0.42	
	7		66	73	81	0.15	0.21	0.28	0.37	0.41	
	8		62	70	78	0.12	0.20	0.27	0.33	0.40	
	9		53	58	64	0.10	0.18	0.23	0.30	0.38	
	10		High alloyed steel, and tool steel	50	56	67	0.09	0.18	0.22	0.28	0.31
	11			37	46	50	0.09	0.18	0.22	0.28	0.31
	12			Stainless steel	38	43	47	0.10	0.18	0.20	0.24
13	38	43	47		0.10	0.18	0.20	0.24	0.30		
14	43	49	55		0.12	0.20	0.23	0.27	0.35		
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53	
	16		56	70	79	0.13	0.18	0.23	0.28	0.33	
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53	
	18		66	81	93	0.13	0.15	0.28	0.33	0.37	
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56	
	20		66	81	93	0.13	0.15	0.28	0.33	0.37	
N	21	Aluminum-wrought alloy	366	396	427	0.24	0.38	0.45	0.50	0.53	
	22		244	290	291	0.22	0.33	0.40	0.45	0.48	
	27	Copper and Copper Alloys (Bronze / Brass)	136	168	193	0.15	0.24	0.29	0.39	0.47	
S	31	Heat Resistant Super Alloys	50	55	62	0.19	0.19	0.21	0.24	0.30	
	32		38	44	46	0.15	0.17	0.20	0.21	0.25	
	33		38	44	46	0.15	0.17	0.20	0.21	0.25	
	34		38	44	46	0.15	0.17	0.20	0.21	0.25	
	35		38	44	46	0.15	0.17	0.20	0.21	0.25	
H	38	Hardened steel	38	43	47	0.10	0.18	0.20	0.24	0.30	

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.