




SPADE DRILL INSERTS - SUPER HSS T15

- EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL - Super HSS T15
- CUSPIDI SPADE DRILL - SUPER HSS T15



- ▶ For use in high nickel alloys and materials over 280 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A376

Recommended ToolHolder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245-246	-	-
	ER COLLET CHUCK		D73-115	

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
<b>Y</b>  Ø9.50 (.374) to Ø11.07 (.436)	3/8	9.50	.3740	2.4 (3/32)	S1155095	S1160095	S1165095
		9.53	.3750		S1105024	S1110024	S1115024
	25/64	9.80	.3860		S1155098	S1160098	S1165098
		9.92	.3906		S1105025	S1110025	S1115025
	13/32	10.00	.3937		S1155100	S1160100	S1165100
		10.20	.4016		S1155102	S1160102	S1165102
	27/64	10.32	.4063		S1105026	S1110026	S1115026
		10.50	.4134		S1155105	S1160105	S1165105
	7/16	10.72	.4219		S1105027	S1110027	S1115027
		10.80	.4252		S1155108	S1160108	S1165108
<b>Z</b>  Ø11.11(.437) to Ø12.95(.510)	11.00	11.00	.4331	2.4 (3/32)	S1155110	S1160110	S1165110
		11.11	.4375		S1105028	S1110028	S1115028
	15/32	11.50	.4528		S1155115	S1160115	S1165115
		11.51	.4531		S1105029	S1110029	S1115029
	31/64	11.91	.4688		S1105030	S1110030	S1115030
		12.00	.4724		S1155120	S1160120	S1165120
	1/2	12.30	.4844		S1105031	S1110031	S1115031
		12.50	.4921		S1155125	S1160125	S1165125
	33/64	12.70	.5000		S1105032	S1110032	S1115032
		13.00	.5118		S1155130	S1160130	S1165130
<b>O</b>  Ø12.98 (.511) to Ø17.65 (.695)	17/32	13.10	.5156	3.2 (1/8)	S1105033	S1110033	S1115033
		13.49	.5313		S1105034	S1110034	S1115034
	35/64	13.50	.5315		S1155135	S1160135	S1165135
		13.89	.5469		S1105035	S1110035	S1115035
	9/16	14.00	.5512		S1155140	S1160140	S1165140
		14.29	.5625		S1105036	S1110036	S1115036
	37/64	14.50	.5709		S1155145	S1160145	S1165145
		14.68	.5781		S1105037	S1110037	S1115037
	19/32	15.00	.5906		S1155150	S1160150	S1165150
		15.08	.5938		S1105038	S1110038	S1115038
39/64	15.48	.6094	S1105039	S1110039	S1115039		
	15.50	.6102	S1155155	S1160155	S1165155		
5/8	15.88	.6250	S1105040	S1110040	S1115040		
	16.00	.6299	S1155160	S1160160	S1165160		

◎ : Excellent ○ : Good

ISO Material Description	P										M					K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel			Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎		

ISO Material Description	N										S					H					
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	15	30	25	38	34	55	60	40	42	55	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○						○			◎	○	○	○	○			○	○		


### SPADE DRILL INSERTS - SUPER HSS T15

- EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL - Super HSS T15
- CUSPIDI SPADE DRILL - SUPER HSS T15



- ▶ For use in high nickel alloys and materials over 280 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A376

Recommended ToolHolder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER D245-246	-	-	-
	ER COLLET CHUCK		D73-115	

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
<b>0</b> Ø12.98 (.511) to Ø17.65 (.695)	41/64	16.27	.6406	3.2 (1/8)	S1105041	S1110041	S1115041
		16.50	.6496		S1155165	S1160165	S1165165
	21/32	16.67	.6563		S1105042	S1110042	S1115042
		17.00	.6693		S1155170	S1160170	S1165170
	43/64	17.07	.6719		S1105043	S1110043	S1115043
	11/16	17.46	.6875		S1105044	S1110044	S1115044
		17.50	.6890		S1155175	S1160175	S1165175
	45/64	17.86	.7031		S1105045	S1110045	S1115045
		18.00	.7087		S1155180	S1160180	S1165180
		18.26	.7188		S1105046	S1110046	S1115046
<b>1</b> Ø17.53 (.690) to Ø24.38 (.960)		18.50	.7283	4.0 (5/32)	S1155185	S1160185	S1165185
	47/64	18.65	.7344		S1105047	S1110047	S1115047
		19.00	.7480		S1155190	S1160190	S1165190
	3/4	19.05	.7500		S1105048	S1110048	S1115048
	49/64	19.45	.7656		S1105049	S1110049	S1115049
		19.50	.7677		S1155195	S1160195	S1165195
	25/32	19.84	.7813		S1105050	S1110050	S1115050
		20.00	.7874		S1155200	S1160200	S1165200
	51/64	20.24	.7969		S1105051	S1110051	S1115051
		20.50	.8071		S1155205	S1160205	S1165205
	13/16	20.64	.8125		S1105052	S1110052	S1115052
		21.00	.8268		S1155210	S1160210	S1165210
	27/32	21.43	.8438		S1105054	S1110054	S1115054
		21.83	.8594		S1105055	S1110055	S1115055
		22.00	.8661		S1155220	S1160220	S1165220
	7/8	22.23	.8750		S1105056	S1110056	S1115056
	57/64	22.62	.8906		S1105057	S1110057	S1115057
		23.00	.9055		S1155230	S1160230	S1165230
	29/32	23.02	.9063		S1105058	S1110058	S1115058
		23.42	.9219		S1105059	S1110059	S1115059
59/64	23.81	.9375	S1105060	S1110060	S1115060		
	24.00	.9449	S1155240	S1160240	S1165240		

◎ : Excellent ○ : Good

ISO	P										M				K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	10	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎		◎	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎		

ISO	N					S										H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○					○				◎	○	○	○	○			○			




SPADE DRILL INSERTS - SUPER HSS T15

- EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL - Super HSS T15
- CUSPIDI SPADE DRILL - SUPER HSS T15



- ▶ For use in high nickel alloys and materials over 280 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A376



Flat Shank	Page	Plain Shank	Page
INDEXABLE DRILL HOLDER	D245-246	-	-
ER COLLET CHUCK			D73-115

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TIN	TICN	TiAIN
2 Ø24.41 (.961) to Ø35.05 (1.380)	31/32	24.61	.9688	4.8 (3/16)	S1105062	S1110062	S1115062
	63/64	25.00	.9843		S1155250	S1160250	S1165250
	1	25.40	1.0000		S1105100	S1110100	S1115100
	1-1/64	25.80	1.0156		S1105101	S1110101	S1115101
		26.00	1.0236		S1155260	S1160260	S1165260
	1-1/32	26.19	1.0313		S1105102	S1110102	S1115102
	1-3/64	26.59	1.0469		S1105103	S1110103	S1115103
	1-1/16	26.99	1.0625		S1105104	S1110104	S1115104
		27.00	1.0630		S1155270	S1160270	S1165270
	1-3/32	27.78	1.0938		S1105106	S1110106	S1115106
		28.00	1.1024		S1155280	S1160280	S1165280
	1-7/64	28.18	1.1094		S1105107	S1110107	S1115107
	1-1/8	28.58	1.1250		S1105108	S1110108	S1115108
		29.00	1.1417		S1155290	S1160290	S1165290
	1-5/32	29.37	1.1563		S1105110	S1110110	S1115110
		30.00	1.1811		S1155300	S1160300	S1165300
	1-3/16	30.16	1.1875		S1105112	S1110112	S1115112
	1-7/32	30.96	1.2188		S1105114	S1110114	S1115114
	31.00	1.2205	S1155310	S1160310	S1165310		
1-1/4	31.75	1.2500	S1105116	S1110116	S1115116		
	32.00	1.2598	S1155320	S1160320	S1165320		
1-9/32	32.54	1.2813	S1105118	S1110118	S1115118		
1-5/16	33.00	1.2992	S1155330	S1160330	S1165330		
	33.34	1.3125	S1105120	S1110120	S1115120		
	34.00	1.3386	S1155340	S1160340	S1165340		
1-11/32	34.13	1.3438	S1105122	S1110122	S1115122		
1-3/8	34.93	1.3750	S1105124	S1110124	S1115124		
	35.00	1.3780	S1155350	S1160350	S1165350		
3 Ø34.37(1.353) to Ø47.80(1.882)	1-13/32	35.72	1.4063	6.4 (1/4)	S1105126	S1110126	S1115126
		36.00	1.4173		S1155360	S1160360	S1165360
	1-7/16	36.51	1.4375		S1105128	S1110128	S1115128
		37.00	1.4567		S1155370	S1160370	S1165370
	1-15/32	37.31	1.4688		S1105130	S1110130	S1115130
	38.00	1.4961	S1155380	S1160380	S1165380		

◎ : Excellent ○ : Good


ISO Material Description	P										M						K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	36	10	29	32	38	15	35	15	23	10	10	26	3	25	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎		

ISO Material Description	N										S						H				
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	15	30	25	38	34	15	30	25	38	34	15	30	25	38	34	400Rm	1050Rm	550	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○									◎	○	○	○	○						

### SPADE DRILL INSERTS - SUPER HSS T15

- EINWEG BOHREINSATZ - SUPER HSS T15
- Plaquettes SPADE DRILL - Super HSS T15
- CUSPIDI SPADE DRILL - SUPER HSS T15



- ▶ For use in high nickel alloys and materials over 280 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar

Cutting conditions : p.A376

Recommended ToolHolder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245-246	-	-
	ER COLLET CHUCK		D73-115	

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
<b>3</b> Ø34.37 (1.353) to Ø47.80 (1.882)	1-1/2	38.10	1.5000	6.4 (1/4)	S1105132	S1110132	S1115132
	1-17/32	38.89	1.5313		S1105134	S1110134	S1115134
		39.00	1.5354		S1155390	S1160390	S1165390
	1-9/16	39.69	1.5625		S1105136	S1110136	S1115136
		40.00	1.5748		S1155400	S1160400	S1165400
	1-19/32	40.48	1.5938		S1105138	S1110138	S1115138
		41.00	1.6142		S1155410	S1160410	S1165410
	1-5/8	41.28	1.6250		S1105140	S1110140	S1115140
		42.00	1.6535		S1155420	S1160420	S1165420
	1-21/32	42.07	1.6563		S1105142	S1110142	S1115142
	1-11/16	42.86	1.6875		S1105144	S1110144	S1115144
		43.00	1.6929		S1155430	S1160430	S1165430
	1-23/32	43.66	1.7188		S1105146	S1110146	S1115146
		44.00	1.7323		S1155440	S1160440	S1165440
	1-3/4	44.45	1.7500		S1105148	S1110148	S1115148
	45.00	1.7717	S1155450	S1160450	S1165450		
1-25/32	45.24	1.7813	S1105150	S1110150	S1115150		
	46.00	1.8110	S1155460	S1160460	S1165460		
1-13/16	46.04	1.8125	S1105152	S1110152	S1115152		
1-27/32	46.83	1.8438	S1105154	S1110154	S1115154		
	47.00	1.8504	S1155470	S1160470	S1165470		
1-7/8	47.63	1.8750	S1105156	S1110156	S1115156		
	48.00	1.8898	S1155480	S1160480	S1165480		
<b>4</b> Ø46.99 (1.850) to Ø65.28 (2.570)	1-29/32	48.42	1.9063	7.9 (5/16)	S1105158	S1110158	S1115158
		49.00	1.9291		S1155490	S1160490	S1165490
	1-15/16	49.21	1.9375		S1105160	S1110160	S1115160
		50.00	1.9685		S1155500	S1160500	S1165500
	1-31/32	50.01	1.9688		S1105162	S1110162	S1115162
	2	50.80	2.0000		S1105200	S1110200	S1115200
		51.00	2.0079		S1155510	S1160510	S1165510
	2-1/32	51.59	2.0313		S1105202	S1110202	S1115202
	2-3/64	52.00	2.0472		S1155520	S1160520	S1165520
	2-1/16	52.39	2.0625		S1105204	S1110204	S1115204
	53.00	2.0866	S1155530	S1160530	S1165530		

◎ : Excellent ○ : Good

ISO Material Description	P											M				K							
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc	13	23	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	◎	◎	◎	◎		◎	◎	○	○	○	○	○	○	○	○	◎	○	◎	○	◎			
ISO Material Description	N										S						H						
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	○	○									◎	○	○	○	○			○					


**SPADE DRILL INSERTS - SUPER HSS T15**

- 🇩🇪 **EINWEG BOHREINSATZ - SUPER HSS T15**
- 🇫🇷 **Plaquettes SPADE DRILL - Super HSS T15**
- 🇮🇹 **CUSPIDI SPADE DRILL - SUPER HSS T15**



- ▶ For use in high nickel alloys and materials over 280 Brinell.
- ▶ Set up time can be reduced due to changing inserts easily on the machine.
- ▶ Any non-standard size available.

- ▶ Zur Anwendung bei legierten Stählen mit hohem Nickelanteil und Werkstoffen über 280 Brinell
- ▶ Reduzierte Rüstzeiten, einfacher Einsatzwechsel auf der Maschine
- ▶ Jede Abmessung außerhalb des Kataloges lieferbar



Cutting conditions : p.A376

Recommended ToolHolder	Flat Shank	Page	Plain Shank	Page
	INDEXABLE DRILL HOLDER	D245-246	-	-
	ER COLLET CHUCK		D73-115	

Series Min. to Max. mm (inch)	Diameter			Thick Metric (mm, inch)	EDP No.		
	Inch (inch)	Metric (mm)	Decimal (inch)		SUPER HSS T15		
					TiN	TiCN	TiAlN
<b>4</b> Ø46.99 (1.850) to Ø65.28 (2.570)	2-3/32	53.18	2.0938	7.9 (5/16)	S1105206	S1110206	S1115206
	2-1/8	53.98	2.1250		S1105208	S1110208	S1115208
		54.00	2.1260		S1155540	S1160540	S1165540
	2-5/32	54.77	2.1563		S1105210	S1110210	S1115210
		55.00	2.1654		S1155550	S1160550	S1165550
	2-3/16	55.56	2.1875		S1105212	S1110212	S1115212
		56.00	2.2047		S1155560	S1160560	S1165560
	2-7/32	56.36	2.2188		S1105214	S1110214	S1115214
		57.00	2.2441		S1155570	S1160570	S1165570
	2-1/4	57.15	2.2500		S1105216	S1110216	S1115216
	2-9/32	57.94	2.2813		S1105218	S1110218	S1115218
	2-5/16	58.00	2.2835		S1155580	S1160580	S1165580
		58.74	2.3125		S1105220	S1110220	S1115220
		59.00	2.3228		S1155590	S1160590	S1165590
	2-11/32	59.53	2.3438		S1105222	S1110222	S1115222
		60.00	2.3622		S1155600	S1160600	S1165600
	2-3/8	60.33	2.3750		S1105224	S1110224	S1115224
		61.00	2.4016		S1155610	S1160610	S1165610
	2-13/32	61.12	2.4063		S1105226	S1110226	S1115226
	2-7/16	61.91	2.4375		S1105228	S1110228	S1115228
	62.00	2.4409	S1155620	S1160620	S1165620		
2-15/32	62.71	2.4688	S1105230	S1110230	S1115230		
	63.00	2.4803	S1155630	S1160630	S1165630		
2-1/2	63.50	2.5000	S1105232	S1110232	S1115232		
	64.00	2.5197	S1155640	S1160640	S1165640		
2-17/32	64.29	2.5313	S1105234	S1110234	S1115234		
	65.00	2.5591	S1155650	S1160650	S1165650		
2-9/16	65.09	2.5625	S1105236	S1110236	S1115236		

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	36	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N										S						H				
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○									◎	○	○	○	○						

SELECTION GUIDE



SERIES	1~8	Y,Z,0,1~4	Y,Z,0,1,2
TOOL MATERIAL	HSS M4	SUPER HSS T15	PREMIUM HSS M48
POINT	STANDARD	STANDARD	STANDARD
SIZE MIN	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)
SIZE MAX	Ø114.3(#8)	Ø65.09(#4)	Ø35(#2)
PAGE	A286	A292	A297



Please visit [globalyg1.com/mat](http://globalyg1.com/mat) for material search

SURFACE TREATMENT

TiN / TiCN / TiAIN

# INSERTS & HOLDERS SPADE DRILLS

For General Machines and Drilling Large Diameters  
Longer Tool Life and High Productivity

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A375



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	◎	◎
	2		About 0.45% C Annealed	190	13	○	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	○	◎	◎
	4		About 0.75% C Annealed	270	28	○	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	○	◎	◎
	7		Quenched & Tempered	275	29	○	◎	◎
	8		Quenched & Tempered	300	32		○	◎
	9		Quenched & Tempered	350	38		○	◎
	10		High alloyed steel, and tool steel	Annealed	200	15		○
	11	Quenched & Tempered		325	35		○	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	○	
	13		Martensitic Quenched & Tempered	240	23	◎	○	
	14		Austenitic	180	10	◎	○	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	○	○
	16		Pearlitic (Martensitic)	260	26	○	◎	◎
	17	Nodular cast iron	Ferritic	160	3	◎	○	○
	18		Pearlitic	250	25	○	◎	◎
	19		Ferritic	130		◎	○	○
20	Malleable cast iron	Pearlitic	230	21	○	◎	◎	
N	21	Aluminum-wrought alloy	Not Curable	60		◎	○	○
	22		Curable Hardened	100		◎	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75				
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26		Copper and Copper Alloys	Cutting Alloys, PB>1%	110			
	27	Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90		◎	○	○
	28		CuSn, lead-free copper and electrolytic copper	100				
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		◎	◎
	32		Cured	280	30		○	◎
	33		Annealed	250	25		○	◎
	34		Ni or Co Based Cured	350	38		○	◎
	35	Cast	320	34		○	◎	
	36	Titanium Alloys	Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55		○	◎
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			

REAMERS	<b>TAPER SHANK</b>		TAPER SHANK HOLDERS - INCH/METRIC	<b>A364</b>
COUNTER SINKS	<b>FLANGED SHANK</b>		FLANGED STRAIGHT SHANK HOLDERS - INCH/METRIC	<b>A364</b>
COUNTER BORES	<b>STRAIGHT SHANK</b>		STRAIGHT SHANK HOLDERS - INCH	<b>A382</b>

Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	1~3	Y,Z,0,1~3	Y,Z,0,1,2	Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	Y,Z,0,1,2
CARBIDE K10	CARBIDE K20	CARBIDE P40	HSS M4	SUPER HSS T15	PREMIUM HSS M48	CARBIDE K10	CARBIDE K20	CARBIDE P40	SUPER COBALT T15
STANDARD	STANDARD	STANDARD	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	FALT BOTTOM
Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)
Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)	Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)
<b>A300</b>	<b>A303</b>	<b>A307</b>	<b>A312</b>	<b>A315</b>	<b>A319</b>	<b>A322</b>	<b>A325</b>	<b>A329</b>	<b>A361</b>
TiN / TiCN / TiAlN									TiN / Hardslick / TiAlN




											1	DREAM DRILLS -FLAT BOTTOM
											2	DREAM DRILLS -INOX
											3	DREAM DRILLS -ML
											4	DREAM DRILLS -ML
											5	DREAM DRILLS -ML
											6	DREAM DRILLS -ML
											7	DREAM DRILLS -ML
											8	DREAM DRILLS -ML
											9	DREAM DRILLS -ML
											10	DREAM DRILLS -ML
											11	DREAM DRILLS -ML
											12	DREAM DRILLS for HIGH HARDENED STEELS
											13	DREAM DRILLS for HIGH HARDENED STEELS
											14	DREAM DRILLS for HIGH HARDENED STEELS
											15	GENERAL CARBIDE DRILLS
											16	GENERAL CARBIDE DRILLS
											17	GENERAL CARBIDE DRILLS
											18	GENERAL CARBIDE DRILLS
											19	GENERAL CARBIDE DRILLS
											20	GENERAL CARBIDE DRILLS
											21	GENERAL CARBIDE DRILLS
											22	GENERAL CARBIDE DRILLS
											23	GENERAL CARBIDE DRILLS
											24	GENERAL CARBIDE DRILLS
											25	GENERAL CARBIDE DRILLS
											26	GENERAL CARBIDE DRILLS
											27	GENERAL CARBIDE DRILLS
											28	GENERAL CARBIDE DRILLS
											29	GENERAL CARBIDE DRILLS
											30	GENERAL CARBIDE DRILLS
											31	GENERAL CARBIDE DRILLS
											32	GENERAL CARBIDE DRILLS
											33	GENERAL CARBIDE DRILLS
											34	GENERAL CARBIDE DRILLS
											35	GENERAL CARBIDE DRILLS
											36	GENERAL CARBIDE DRILLS
											37	GENERAL CARBIDE DRILLS
											38	GENERAL CARBIDE DRILLS
											39	GENERAL CARBIDE DRILLS
											40	GENERAL CARBIDE DRILLS
											41	GENERAL CARBIDE DRILLS

Coating	Characteristics	Coating	Characteristics
H	<ul style="list-style-type: none"> <li>-First choice for excellent wear resistance and toughness</li> <li>-Preventive of chipping due to cold welding</li> <li>-Achieve high penetration rates even in deep holes with reliable tool life</li> <li>-Coefficient of friction against steel : 0.25</li> <li>-Color : Bronze</li> </ul>	TiCN	<ul style="list-style-type: none"> <li>-Maximum working temperature up to 400°C</li> <li>-Better wear resistance over non-coating</li> <li>-Coefficient of friction against steel : 0.4</li> <li>-Color : Blue-Grey</li> </ul>
		TiAlN	<ul style="list-style-type: none"> <li>-Maximum working temperature up to 800°C</li> <li>-Excellent heat and oxidation resistance</li> <li>-Coefficient of friction against steel : 0.4</li> <li>-Color : Violet-Grey</li> </ul>
TiN	<ul style="list-style-type: none"> <li>-Increased tool life over non-coating</li> <li>-Improved wear resistance and high hardness</li> <li>-For normal applications</li> <li>-Coefficient of friction against steel : 0.4</li> <li>-Color : Gold</li> </ul>	Hardslick	<ul style="list-style-type: none"> <li>-Better chip evacuation for tapping and drilling</li> <li>-High hardness and improved lubrication</li> <li>-Coefficient of friction against steel : 0.2</li> <li>-Color : Black-Grey</li> </ul>

# PRODUCT FEATURES


## SPADE DRILLS (Standard, SM-Point)

Reference page : p.A299 - p.A380

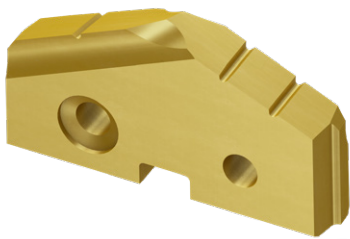

### Standard-Point

Standard Point  
and Neutral Rake Angle for  
**Stable Cutting**  
**Self Centering**  
**Chip Breaking**  
**Rigidity on Center**




### SM-Point

Multiple Web Thinning for and Radius Back Face  
for Increased Cutting Speed and Feed  
**Wide Chip Space**  
**Good Self-Centering**  
**Less Tool Lead-off**  
**Reduction in bell mouching**



Multi Layers

Carbide

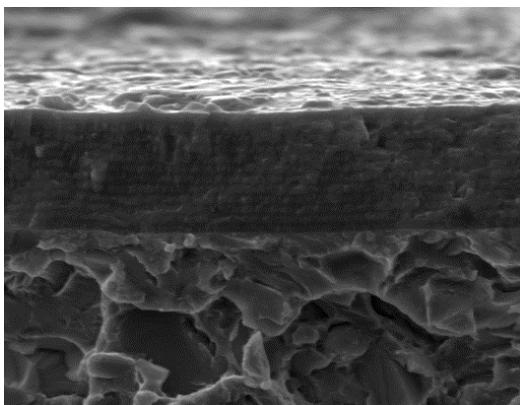

### Multi layered 'H'-coating Micro Grain Carbide Insert

Outstanding Productivity & Reliability

#### H - Coating

(Upgraded AlCrN-Based : **Multi-Layer coating**)

- Higher worn-out resistance and Lower friction
- Higher Cutting Speed and Feed
- Improved drill Hole Quality





# Special features of SM-Point Spade Drill

This new "Hybrid Point" combines the strength of the standard point with additional "Web Thinning".


This new point increases stability, reduces thrust, improves centering and allows increased speeds and feeds.

**Multiple thinning form at the bottom of the large thinning.**

- ▶ The optimum thinning for the difference from the cutting speed, the cutting quantity and the cutting load according to the distance from the drill point to the cutting edge.


**Radius back face**

- ▶ Wide chip space

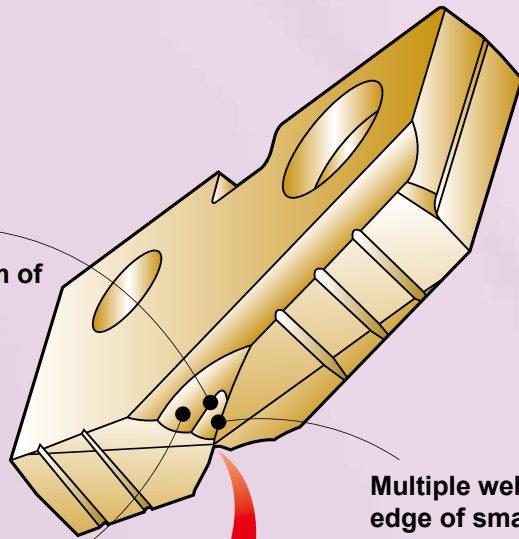


**Multiple web thinning with the cutting edge of small web thinning.**

- ▶ Good self-centering
- ▶ Less tool lead off
- ▶ Reduction in bell mouching, thrust
- ▶ Increased stability




**Four-facet point**

- ▶ Self-centering
- ▶ Less thrust force

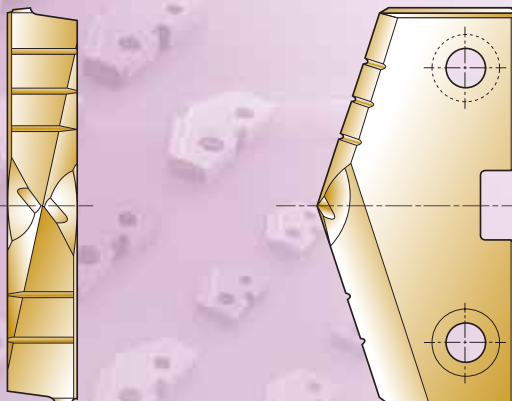

**HOLDER ACCESSORIES**  
**ROTARY COOLANT ADAPTER (RCA) AND ACCESSORIES**

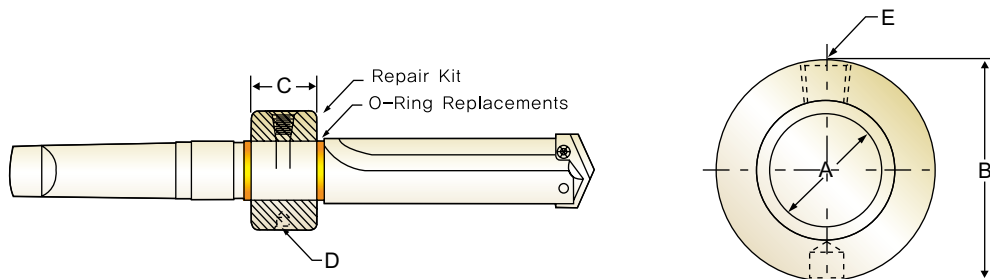

**Inch**

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR110048	3/4	1-3/4	7/8	5/16-NC	◆1/8	PR210048	PR310048
PR110100	1	2-1/8	1-1/8	5/16-NC	◆1/8	PR210100	PR310100
PR110116	1-1/4	2-1/2	1-3/8	3/8-NC	◆1/4	PR210116	PR310116
PR110148	1-3/4	3	1-3/8	3/8-NC	◆1/4	PR210148	PR310148
PR110216	2-1/4	3-3/4	1-3/4	1/2-NC	◆1/2	PR210216	PR310216

**Metric**

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR120190	19.05	44.45	22.23	M8 × 1.25	◆1/8	PR220190	PR320190
PR120254	25.40	53.97	28.57	M8 × 1.25	◆1/8	PR220254	PR320254
PR120317	31.75	63.50	34.92	M10 × 1.5	◆1/4	PR220317	PR320317
PR120444	44.45	76.20	34.92	M10 × 1.5	◆1/4	PR220444	PR320444
PR120571	57.15	95.27	44.45	M12 × 1.75	◆1/2	PR220571	PR320571

◆ Thread to BSP & ISO 7-1

**TORX SCREWS**

Holder Series	Item No.	TORX Hand Driver	Drill Range Used With	
			Inch	Metric
Y	J07Y0010	J05Y0070	3/8 ~ 27/64	9.5 mm ~ 11.0 mm
Z	J07Z0110		7/16 ~ 1/2	11.5 mm ~ 12.5 mm
0	J0800210	J0500080	33/64 ~ 11/16	13.0 mm ~ 17.5 mm
0.5	J0805310		39/64 ~ 11/16	15.5 mm ~ 17.5 mm
1	J0910410	J0510090	45/64 ~ 15/16	18.0 mm ~ 24.0 mm
1.5	J0915510		55/64 ~ 15/16	22.0 mm ~ 24.0 mm
2	J1520610	J0520150	31/32 ~ 1-3/8	25.0 mm ~ 35.0 mm
2.5	J1525710		1-3/16 ~ 1-3/8	30.0 mm ~ 35.0 mm
3,4	J2030810		1-13/32 ~ 2-9/16	36.0 mm ~ 65.0 mm
5 ~ 8	J2550910	J0550250	2-1/2 ~ 4-1/2	64.0 mm ~ 114.0 mm

\*\* Note : Replacement screws sold in packages(10 screws per package)

**SPADE DRILL HSS-T15**

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	8		39	47	53	0.09	0.15	0.22	0.28	0.38	0.41	0.50
	9		36	43	46	0.08	0.15	0.21	0.27	0.38	0.40	0.51
	10		High alloyed steel, and tool steel	25	34	36	0.08	0.17	0.20	0.24	0.30	0.37
	11	19		27	29	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	M	12	Stainless steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36
13		20		23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
14		24		29	34	0.14	0.20	0.23	0.26	0.36	0.41	0.50
K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	16		29	35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	18		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
	19		52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
20	Malleable cast iron	35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50	
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79
S	31	Heat Resistant Super Alloys	9	11	12	0.08	0.17	0.20	0.24	0.30	0.37	0.39
	32		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	33		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	34		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	35		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
H	38	Hardened steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46

- The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.  
 Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.