


TAPER SHANK HOLDERS


- HALTER MIT MORSEKEGEL
- Porte-plaquette à queue cône morse
- PUNTE CON ATTACCO CM

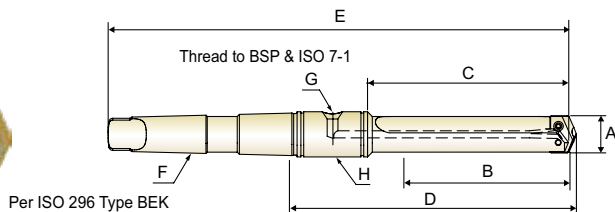

SHORT LENGTH - Straight Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
Y	ZY0STSMT02M	9.5 ~ 11.0	31.8	51.5	88.0	160.3	#2	1/16	PR120190
Z	ZZ0STSMT02M	11.5 ~ 12.5	31.8	51.5	88.0	160.3	#2	1/16	PR120190
0	Z00STSMT02M	13.0 ~ 17.5	35.0	55.5	92.4	164.3	#2	1/16	PR120190
0.5	Z05STSMT02M	15.5 ~ 17.5	35.0	55.5	92.4	164.3	#2	1/16	PR120190
1	Z10STSMT03M	18.0 ~ 24.0	69.8	98.4	142.5	232.5	#3	1/8	PR120254
1.5	Z15STSMT03M	22.0 ~ 24.0	69.8	98.4	142.5	232.5	#3	1/8	PR120254
2	Z20STSMT04M	25.0 ~ 35.0	85.7	114.3	160.4	273.8	#4	1/8	PR120254
2.5	Z25STSMT04M	30.0 ~ 35.0	85.7	114.3	167.6	281.0	#4	1/4	PR120317
3	Z30STSMT04M	36.0 ~ 47.0	120.6	152.4	206.4	319.1	#4	1/4	PR120317
4	Z40STSMT05M	48.0 ~ 65.0	130.1	165.1	219.1	363.5	#5	1/4	PR120444
5	Z50STSMT05M	64.0 ~ 88.0	171.5	215.9	287.3	430.2	#5	1/2	PR120571
7	Z70STSMT05M	90.0 ~ 114.0	171.5	225.4	296.8	439.7	#5	1/2	PR120571

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

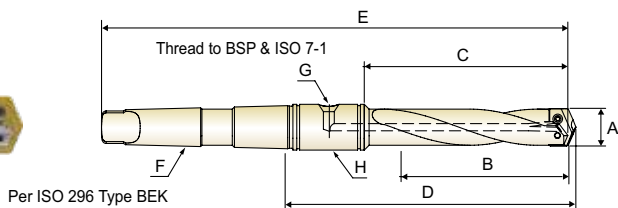

INTERMEDIATE LENGTH - Helical Flute (Metric)

Series	EDP No.	Drill Insert Range	Max. Drill Depth	Body Length	Ref. Length	Overall Length	MT	Pipe Tap	RCA
		A	B	C	D	E	F	G	H
1	Z10ITHMT03M	18.0 ~ 24.0	120.7	149.2	193.3	283.3	#3	1/8	PR120254
1.5	Z15ITHMT03M	22.0 ~ 24.0	120.7	149.2	193.3	283.3	#3	1/8	PR120254
2	Z20ITHMT04M	25.0 ~ 35.0	136.5	165.1	211.2	324.6	#4	1/8	PR120254
2.5	Z25ITHMT04M	30.0 ~ 35.0	136.5	165.1	218.4	331.8	#4	1/4	PR120317
3	Z30ITHMT04M	36.0 ~ 47.0	165.1	196.9	250.9	363.6	#4	1/4	PR120317

► You can also apply RCA(Rotary Coolant Adapter) for internal cooling. (See page 324)

SELECTION GUIDE



SERIES	1~8	Y,Z,0,1~4	Y,Z,0,1,2
TOOL MATERIAL	HSS M4	SUPER HSS T15	PREMIUM HSS M48
POINT	STANDARD	STANDARD	STANDARD
SIZE MIN	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)
SIZE MAX	Ø114.3(#8)	Ø65.09(#4)	Ø35(#2)
PAGE	A286	A292	A297

Please visit globalyg1.com/mat for material search

SURFACE TREATMENT

TiN / TiCN / TiAIN

INSERTS & HOLDERS SPADE DRILLS

For General Machines and Drilling Large Diameters
Longer Tool Life and High Productivity

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A375



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	◎	◎
	2		About 0.45% C Annealed	190	13	○	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	○	◎	◎
	4		About 0.75% C Annealed	270	28	○	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	○	◎	◎
	7		Quenched & Tempered	275	29	○	◎	◎
	8		Quenched & Tempered	300	32		○	◎
	9		Quenched & Tempered	350	38		○	◎
	10		High alloyed steel, and tool steel	Annealed	200	15		○
	11	Quenched & Tempered		325	35		○	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	○	
	13		Martensitic Quenched & Tempered	240	23	◎	○	
	14		Austenitic	180	10	◎	○	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	○	○
	16		Pearlitic (Martensitic)	260	26	○	◎	◎
	17	Nodular cast iron	Ferritic	160	3	◎	○	○
	18		Pearlitic	250	25	○	◎	◎
	19		Ferritic	130		◎	○	○
20	Malleable cast iron	Pearlitic	230	21	○	◎	◎	
N	21	Aluminum-wrought alloy	Not Curable	60		◎	○	○
	22		Curable Hardened	100		◎	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75				
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26		Copper and Copper Alloys	Cutting Alloys, PB>1%	110			
	27	Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90		◎	○	○
	28		CuSn, lead-free copper and electrolytic copper	100				
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		◎	◎
	32		Cured	280	30		○	◎
	33		Annealed	250	25		○	◎
	34		Ni or Co Based Cured	350	38		○	◎
	35	Cast	320	34		○	◎	
	36	Titanium Alloys	Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55		○	◎
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			

REAMERS	TAPER SHANK		TAPER SHANK HOLDERS - INCH/METRIC	A364
COUNTER SINKS	FLANGED SHANK		FLANGED STRAIGHT SHANK HOLDERS - INCH/METRIC	A364
COUNTER BORES	STRAIGHT SHANK		STRAIGHT SHANK HOLDERS - INCH	A382

Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	1~3	Y,Z,0,1~3	Y,Z,0,1,2	Y,Z,0,1,2	Y,Z,0,1~3	Y,Z,0,1~3	Y,Z,0,1,2
CARBIDE K10	CARBIDE K20	CARBIDE P40	HSS M4	SUPER HSS T15	PREMIUM HSS M48	CARBIDE K10	CARBIDE K20	CARBIDE P40	SUPER COBALT T15
STANDARD	STANDARD	STANDARD	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	SM-POINT	FALT BOTTOM
Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø17.86(#1)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)	Ø9.5(#Y)
Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)	Ø35(#2)	Ø47.63(#3)	Ø47.63(#3)	Ø35(#2)
A300	A303	A307	A312	A315	A319	A322	A325	A329	A361
TiN / TiCN / TiAlN									TiN / Hardslick / TiAlN



											1	DREAM DRILLS -FLAT BOTTOM
											2	DREAM DRILLS -INOX
											3	DREAM DRILLS -ML
											4	DREAM DRILLS -ML
											5	DREAM DRILLS -ML
											6	DREAM DRILLS -ML
											7	DREAM DRILLS -ML
											8	DREAM DRILLS -ML
											9	DREAM DRILLS -ML
											10	DREAM DRILLS -ML
											11	DREAM DRILLS -ML
											12	DREAM DRILLS for HIGH HARDENED STEELS
											13	DREAM DRILLS for HIGH HARDENED STEELS
											14	DREAM DRILLS for HIGH HARDENED STEELS
											15	GENERAL CARBIDE DRILLS
											16	GENERAL CARBIDE DRILLS
											17	GENERAL CARBIDE DRILLS
											18	GENERAL CARBIDE DRILLS
											19	GENERAL CARBIDE DRILLS
											20	GENERAL CARBIDE DRILLS
											21	GENERAL CARBIDE DRILLS
											22	GENERAL CARBIDE DRILLS
											23	GENERAL CARBIDE DRILLS
											24	GENERAL CARBIDE DRILLS
											25	GENERAL CARBIDE DRILLS
											26	GENERAL CARBIDE DRILLS
											27	GENERAL CARBIDE DRILLS
											28	GENERAL CARBIDE DRILLS
											29	GENERAL CARBIDE DRILLS
											30	GENERAL CARBIDE DRILLS
											31	GENERAL CARBIDE DRILLS
											32	GENERAL CARBIDE DRILLS
											33	GENERAL CARBIDE DRILLS
											34	GENERAL CARBIDE DRILLS
											35	GENERAL CARBIDE DRILLS
											36	GENERAL CARBIDE DRILLS
											37	GENERAL CARBIDE DRILLS
											38	GENERAL CARBIDE DRILLS
											39	GENERAL CARBIDE DRILLS
											40	GENERAL CARBIDE DRILLS
											41	GENERAL CARBIDE DRILLS


Coating	Characteristics
H	<ul style="list-style-type: none"> -First choice for excellent wear resistance and toughness -Preventive of chipping due to cold welding -Achieve high penetration rates even in deep holes with reliable tool life -Coefficient of friction against steel : 0.25 -Color : Bronze
TiN	<ul style="list-style-type: none"> -Increased tool life over non-coating -Improved wear resistance and high hardness -For normal applications -Coefficient of friction against steel : 0.4 -Color : Gold

Coating	Characteristics
TiCN	<ul style="list-style-type: none"> -Maximum working temperature up to 400°C -Better wear resistance over non-coating -Coefficient of friction against steel : 0.4 -Color : Blue-Grey
TiAlN	<ul style="list-style-type: none"> -Maximum working temperature up to 800°C -Excellent heat and oxidation resistance -Coefficient of friction against steel : 0.4 -Color : Violet-Grey
Hardslick	<ul style="list-style-type: none"> -Better chip evacuation for tapping and drilling -High hardness and improved lubrication -Coefficient of friction against steel : 0.2 -Color : Black-Grey

PRODUCT FEATURES


SPADE DRILLS (Standard, SM-Point)

Reference page : p.A299 - p.A380

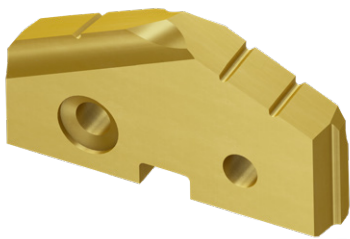

Standard-Point

Standard Point
and Neutral Rake Angle for
Stable Cutting
Self Centering
Chip Breaking
Rigidity on Center




SM-Point

Multiple Web Thinning for and Radius Back Face
for Increased Cutting Speed and Feed
Wide Chip Space
Good Self-Centering
Less Tool Lead-off
Reduction in bell mouching



Multi Layers

Carbide

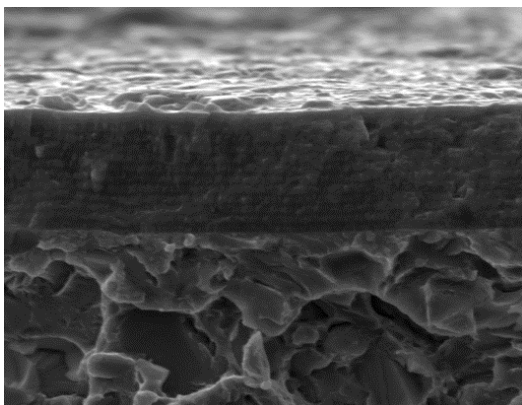

Multi layered 'H'-coating Micro Grain Carbide Insert

Outstanding Productivity & Reliability

H - Coating

(Upgraded AlCrN-Based : **Multi-Layer coating**)

- Higher worn-out resistance and Lower friction
- Higher Cutting Speed and Feed
- Improved drill Hole Quality



Special features of SM-Point Spade Drill

This new "Hybrid Point" combines the strength of the standard point with additional "Web Thinning".


This new point increases stability, reduces thrust, improves centering and allows increased speeds and feeds.

Multiple thinning form at the bottom of the large thinning.

- ▶ The optimum thinning for the difference from the cutting speed, the cutting quantity and the cutting load according to the distance from the drill point to the cutting edge.


Radius back face

- ▶ Wide chip space

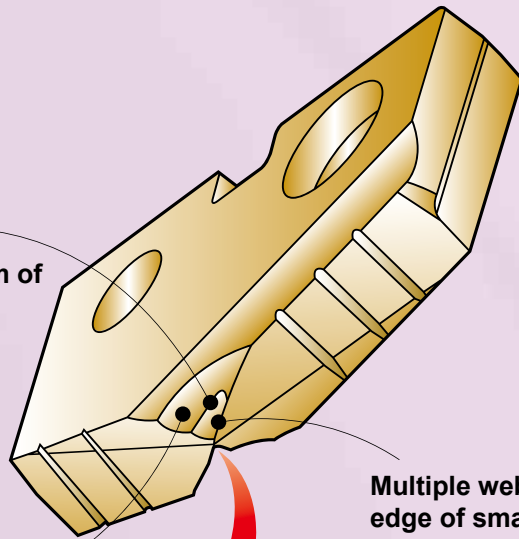


Multiple web thinning with the cutting edge of small web thinning.

- ▶ Good self-centering
- ▶ Less tool lead off
- ▶ Reduction in bell mousing, thrust
- ▶ Increased stability




Four-facet point

- ▶ Self-centering
- ▶ Less thrust force

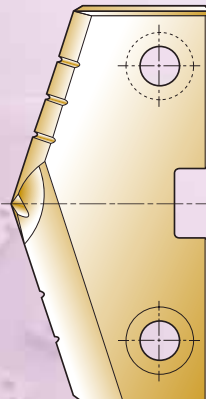

HOLDER ACCESSORIES
ROTARY COOLANT ADAPTER (RCA) AND ACCESSORIES

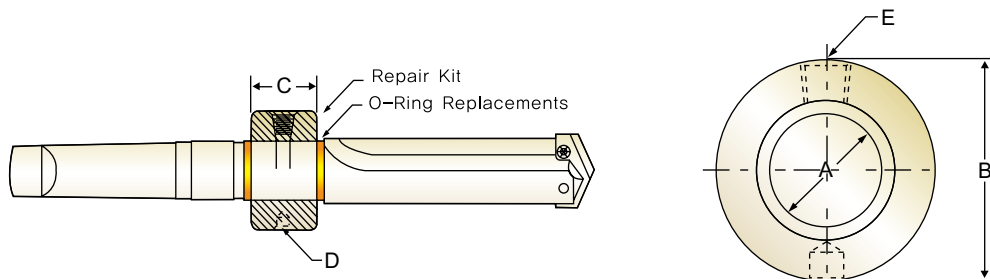

Inch

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR110048	3/4	1-3/4	7/8	5/16-NC	◆1/8	PR210048	PR310048
PR110100	1	2-1/8	1-1/8	5/16-NC	◆1/8	PR210100	PR310100
PR110116	1-1/4	2-1/2	1-3/8	3/8-NC	◆1/4	PR210116	PR310116
PR110148	1-3/4	3	1-3/8	3/8-NC	◆1/4	PR210148	PR310148
PR110216	2-1/4	3-3/4	1-3/4	1/2-NC	◆1/2	PR210216	PR310216

Metric

Item No.	I.D.	O.D.	Length	Thread for Driving Rod	Pipe Tap	RCA Repair Kit Item No.	RCA O-Ring Replacements Item No.
	A	B	C	D	E		
PR120190	19.05	44.45	22.23	M8 × 1.25	◆1/8	PR220190	PR320190
PR120254	25.40	53.97	28.57	M8 × 1.25	◆1/8	PR220254	PR320254
PR120317	31.75	63.50	34.92	M10 × 1.5	◆1/4	PR220317	PR320317
PR120444	44.45	76.20	34.92	M10 × 1.5	◆1/4	PR220444	PR320444
PR120571	57.15	95.27	44.45	M12 × 1.75	◆1/2	PR220571	PR320571

◆ Thread to BSP & ISO 7-1

TORX SCREWS

Holder Series	Item No.	TORX Hand Driver	Drill Range Used With	
			Inch	Metric
Y	J07Y0010	J05Y0070	3/8 ~ 27/64	9.5 mm ~ 11.0 mm
Z	J07Z0110		7/16 ~ 1/2	11.5 mm ~ 12.5 mm
0	J0800210	J0500080	33/64 ~ 11/16	13.0 mm ~ 17.5 mm
0.5	J0805310		39/64 ~ 11/16	15.5 mm ~ 17.5 mm
1	J0910410	J0510090	45/64 ~ 15/16	18.0 mm ~ 24.0 mm
1.5	J0915510		55/64 ~ 15/16	22.0 mm ~ 24.0 mm
2	J1520610	J0520150	31/32 ~ 1-3/8	25.0 mm ~ 35.0 mm
2.5	J1525710		1-3/16 ~ 1-3/8	30.0 mm ~ 35.0 mm
3,4	J2030810		1-13/32 ~ 2-9/16	36.0 mm ~ 65.0 mm
5 ~ 8	J2550910	J0550250	2-1/2 ~ 4-1/2	64.0 mm ~ 114.0 mm

** Note : Replacement screws sold in packages(10 screws per package)

SPADE DRILL HSS-M4

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	M	12	Stainless steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36
13		20		23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
14		24		29	34	0.14	0.20	0.23	0.26	0.36	0.41	0.50
K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	16		29	35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	18		35	44	52	0.13	0.17	0.23	0.3	0.35	0.43	0.50
	19	Malleable cast iron	52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
	20		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
 Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

 i-ONE
 DRILLS

 i-DREAM
 DRILLS

 DREAM
 DRILLS
 -PRO

 DREAM
 DRILLS
 -GENERAL

 DREAM
 DRILLS
 -HIGH FEED

 DREAM
 DRILLS
 -FLAT BOTTOM

 DREAM
 DRILLS
 -INOX

 DREAM
 DRILLS
 -ALU

 DREAM
 DRILLS
 -ML

 DREAM DRILLS
 for HIGH
 HARDENED STEELS

 GENERAL
 CARBIDE
 DRILLS

 MULTI-1
 DRILLS

 HPD
 DRILLS

 GOLD-P
 DRILLS

 SUPER-GP
 DRILLS

 STRAIGHT
 SHANK
 DRILLS

 TAPER SHANK
 DRILLS

 NC-
 SPOTTING
 DRILLS

 CENTER
 DRILLS

**SPADE
 DRILLS**

REAMERS

 COUNTER
 SINKS

 COUNTER
 BORES

 TECHNICAL
 DATA

SPADE DRILL HSS-T15

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	8		39	47	53	0.09	0.15	0.22	0.28	0.38	0.41	0.50
	9		36	43	46	0.08	0.15	0.21	0.27	0.38	0.40	0.51
	10		High alloyed steel, and tool steel	25	34	36	0.08	0.17	0.20	0.24	0.30	0.37
	11	19		27	29	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	M	12	Stainless steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36
13		20		23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46
14		24		29	34	0.14	0.20	0.23	0.26	0.36	0.41	0.50
K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	16		29	35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
	17	Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
	18		35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
	19		52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
20	Malleable cast iron	35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50	
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79
S	31	Heat Resistant Super Alloys	9	11	12	0.08	0.17	0.20	0.24	0.30	0.37	0.39
	32		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	33		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	34		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	35		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
H	38	Hardened steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46

- The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
 Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

SPADE DRILL HSS-M48

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)						
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	Ø48-65	Ø66-114
P	1	Non-alloy steel	54	67	75	0.15	0.22	0.28	0.37	0.46	0.56	0.67
	2		49	58	69	0.13	0.19	0.24	0.34	0.43	0.50	0.57
	3		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	4		45	56	63	0.13	0.19	0.23	0.34	0.43	0.50	0.58
	6	Low alloy steel	45	56	58	0.13	0.20	0.24	0.36	0.42	0.46	0.55
	7		41	50	56	0.13	0.16	0.23	0.35	0.41	0.44	0.55
	8		39	47	53	0.09	0.15	0.22	0.28	0.38	0.41	0.50
	9		36	43	46	0.08	0.15	0.21	0.27	0.38	0.40	0.51
	10		High alloyed steel, and tool steel	25	34	36	0.08	0.17	0.20	0.24	0.30	0.37
	11	19		27	29	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	K	15	Grey cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64
16		29		35	41	0.10	0.15	0.16	0.23	0.28	0.35	0.40
17		Nodular cast iron	48	58	70	0.14	0.26	0.35	0.45	0.56	0.64	0.68
18			35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
19		Malleable cast iron	52	64	75	0.16	0.30	0.40	0.49	0.59	0.69	0.75
20			35	44	52	0.13	0.17	0.23	0.30	0.35	0.43	0.50
N	21	Aluminum-wrought alloy	187	229	244	0.19	0.33	0.41	0.50	0.54	0.64	0.70
	22		92	137	137	0.19	0.33	0.41	0.46	0.54	0.64	0.70
	27	Copper and Copper Alloys (Bronze / Brass)	95	128	142	0.19	0.31	0.43	0.53	0.64	0.74	0.79
S	31	Heat Resistant Super Alloys	9	11	12	0.08	0.17	0.20	0.24	0.30	0.37	0.39
	32		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	33		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	34		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
	35		8	9	11	0.08	0.14	0.18	0.19	0.25	0.29	0.34
H	38	Hardened steel	20	23	29	0.12	0.18	0.20	0.24	0.30	0.36	0.46

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points.
Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.



SPADE DRILL CARBIDE-K10

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)				
			TiN	TiCN	TiAlN	Ø9.5~12.5	Ø13~17.5	Ø18~24	Ø25~35	Ø36~47
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	16		56	70	79	0.13	0.18	0.23	0.28	0.33
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	18		66	81	93	0.13	0.15	0.28	0.33	0.37
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56
	20		66	81	93	0.13	0.15	0.28	0.33	0.37

SPADE DRILL CARBIDE-K20

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)					
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47	
P	1	Non-alloy steel	94	110	119	0.20	0.24	0.31	0.42	0.46	
	2		76	82	96	0.15	0.22	0.29	0.36	0.40	
	3		66	70	84	0.15	0.22	0.28	0.36	0.40	
	4		66	70	84	0.15	0.22	0.28	0.36	0.40	
	6	Low alloy steel	73	81	88	0.15	0.23	0.29	0.38	0.42	
	7		66	73	81	0.15	0.21	0.28	0.37	0.41	
	8		62	70	78	0.12	0.20	0.27	0.33	0.40	
	9		53	58	64	0.10	0.18	0.23	0.30	0.38	
	10		High alloyed steel, and tool steel	50	56	67	0.09	0.18	0.22	0.28	0.31
	11			37	46	50	0.09	0.18	0.22	0.28	0.31
	12			Stainless steel	38	43	47	0.10	0.18	0.20	0.24
13	38	43	47		0.10	0.18	0.20	0.24	0.30		
14	43	49	55		0.12	0.20	0.23	0.27	0.35		
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53	
	16		56	70	79	0.13	0.18	0.23	0.28	0.33	
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53	
	18		66	81	93	0.13	0.15	0.28	0.33	0.37	
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56	
	20		66	81	93	0.13	0.15	0.28	0.33	0.37	
N	21	Aluminum-wrought alloy	366	396	427	0.24	0.38	0.45	0.50	0.53	
	22		244	290	291	0.22	0.33	0.40	0.45	0.48	
	27	Copper and Copper Alloys (Bronze / Brass)	136	168	193	0.15	0.24	0.29	0.39	0.47	
S	31	Heat Resistant Super Alloys	50	55	62	0.19	0.19	0.21	0.24	0.30	
	32		38	44	46	0.15	0.17	0.20	0.21	0.25	
	33		38	44	46	0.15	0.17	0.20	0.21	0.25	
	34		38	44	46	0.15	0.17	0.20	0.21	0.25	
	35		38	44	46	0.15	0.17	0.20	0.21	0.25	
H	38	Hardened steel	38	43	47	0.10	0.18	0.20	0.24	0.30	

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

SPADE DRILL FLAT BOTTOM HSS-T15

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)		Feed(mm/rev)			
			TiN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35
P	1	Non-alloy steel	54	60	0.12	0.18	0.22	0.30
	2		46	55	0.10	0.15	0.19	0.27
	3		45	50	0.10	0.15	0.18	0.27
	4		42	46	0.08	0.14	0.17	0.22
	6	Low alloy steel	45	46	0.10	0.16	0.19	0.29
	7		40	45	0.10	0.13	0.18	0.28
	8		38	42	0.07	0.12	0.18	0.22
	9		34	37	0.06	0.12	0.17	0.22
	10	High alloyed steel, and tool steel	27	29	0.07	0.12	0.15	0.20
	11		22	23	0.07	0.12	0.15	0.20
	M	12	Stainless steel	23	25	0.13	0.15	0.18
13		23		25	0.13	0.15	0.18	0.22
14		26		29	0.17	0.18	0.20	0.23
K	15	Grey cast iron	51	60	0.12	0.21	0.29	0.40
	16		38	48	0.10	0.14	0.20	0.25
	17	Nodular cast iron	51	60	0.12	0.21	0.29	0.40
	18		38	48	0.10	0.14	0.20	0.25
	19	Malleable cast iron	56	66	0.13	0.25	0.35	0.41
	20		38	48	0.10	0.14	0.20	0.25
N	21	Aluminum-wrought alloy	208	213	0.17	0.28	0.36	0.43
	22		112	121	0.17	0.28	0.36	0.41
	27	Copper and Copper Alloys (Bronze / Brass)	48	70	0.15	0.26	0.37	0.45
S	31	Heat Resistant Super Alloys	20	10	0.06	0.14	0.16	0.19
	32		7	9	0.06	0.11	0.14	0.15
	33		7	9	0.06	0.11	0.14	0.15
	34		7	9	0.06	0.11	0.14	0.15
	35		7	9	0.06	0.11	0.14	0.15
H	38	Hardened steel	23	25	0.13	0.15	0.18	0.22

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

i-ONE DRILLS

i-DREAM DRILLS

DREAM DRILLS -PRO

DREAM DRILLS -GENERAL

DREAM DRILLS -HIGH FEED

DREAM DRILLS -FLAT BOTTOM

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -MQL

DREAM DRILLS for HIGH HARDENED STEELS

GENERAL CARBIDE DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

SUPER-GP DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

REAMERS

COUNTER SINKS

COUNTER BORES

TECHNICAL DATA



SPADE DRILL CARBIDE-P40

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc(m/min)			Feed(mm/rev)				
			TiN	TiCN	TiAlN	Ø9.5-12.5	Ø13-17.5	Ø18-24	Ø25-35	Ø36-47
P	1	Non-alloy steel	94	110	119	0.20	0.24	0.31	0.42	0.46
	2		76	82	96	0.15	0.22	0.29	0.36	0.40
	3		66	70	84	0.15	0.22	0.28	0.36	0.40
	4		66	70	84	0.15	0.22	0.28	0.36	0.40
	6	Low alloy steel	73	81	88	0.15	0.23	0.29	0.38	0.42
	7		66	73	81	0.15	0.21	0.28	0.37	0.41
	8		62	70	78	0.12	0.20	0.27	0.33	0.40
	9		53	58	64	0.10	0.18	0.23	0.30	0.38
	10		High alloyed steel, and tool steel	50	56	67	0.09	0.18	0.22	0.28
	11	37		46	50	0.09	0.18	0.22	0.28	0.31
	M	12	Stainless steel	38	43	47	0.10	0.18	0.20	0.24
13		38		43	47	0.10	0.18	0.20	0.24	0.30
14		43		49	55	0.12	0.20	0.23	0.27	0.35
K	15	Grey cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	16		56	70	79	0.13	0.18	0.23	0.28	0.33
	17	Nodular cast iron	95	101	125	0.17	0.26	0.32	0.42	0.53
	18		66	81	93	0.13	0.15	0.28	0.33	0.37
	19	Malleable cast iron	98	125	137	0.18	0.30	0.37	0.46	0.56
	20		66	81	93	0.13	0.15	0.28	0.33	0.37
N	21	Aluminum-wrought alloy	366	396	427	0.24	0.38	0.45	0.50	0.53
	22		244	290	291	0.22	0.33	0.40	0.45	0.48
	27	Copper and Copper Alloys (Bronze / Brass)	136	168	193	0.15	0.24	0.29	0.39	0.47
S	31	Heat Resistant Super Alloys	50	55	62	0.19	0.19	0.21	0.24	0.30
	32		38	44	46	0.15	0.17	0.20	0.21	0.25
	33		38	44	46	0.15	0.17	0.20	0.21	0.25
	34		38	44	46	0.15	0.17	0.20	0.21	0.25
	35		38	44	46	0.15	0.17	0.20	0.21	0.25
H	38	Hardened steel	38	43	47	0.10	0.18	0.20	0.24	0.30

► The recommendations for speeds, feeds and other parameters presented in this chart are nominal recommendations and should be considered only as good starting points. Speed and feed reductions (20% reduction in speed and 10% reduction in feed) are recommended.

- i-ONE DRILLS
- i-DREAM DRILLS
- DREAM DRILLS -PRO
- DREAM DRILLS -GENERAL
- DREAM DRILLS -HIGH FEED
- DREAM DRILLS -FLAT BOTTOM
- DREAM DRILLS -INOX
- DREAM DRILLS -ALU
- DREAM DRILLS -MQL
- DREAM DRILLS for HIGH HARDENED STEELS
- GENERAL CARBIDE DRILLS
- MULTI-1 DRILLS
- HPD DRILLS
- GOLD-P DRILLS
- SUPER-GP DRILLS
- STRAIGHT SHANK DRILLS
- TAPER SHANK DRILLS
- NC-SPOTTING DRILLS
- CENTER DRILLS
- SPADE DRILLS**
- REAMERS
- COUNTER SINKS
- COUNTER BORES
- TECHNICAL DATA