

Y/G STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS


KURZ

COURTE

CORTA

- ▶ **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
- ▶ **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

- ▶ **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm
- ▶ **Verwendung** : Zum Bohren von Stahl und Stahlguß,
Grauguß, Temperguß, Sphäroguß,
Sintereisen, Graphite.

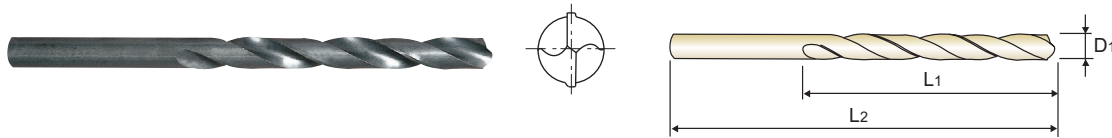

DIN 338
HSS
N 20~30°
h8
118°
P.276-277

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D1105003	0.3	3	19
D1105004	0.4	5	20
D1105005	0.5	6	22
D1105006	0.6	7	24
D1105007	0.7	9	28
D1105008	0.8	10	30
D1105009	0.9	11	32
D1105010	1.0	12	34
D1105910	1.05	12	34
D1105011	1.1	14	36
D1105911	1.15	14	36
D1105012	1.2	16	38
D1105912	1.25	16	38
D1105013	1.3	16	38
D1105913	1.35	18	40
D1105014	1.4	18	40
D1105914	1.45	18	40
D1105015	1.5	18	40
D1105915	1.55	20	43
D1105016	1.6	20	43
D1105916	1.65	20	43
D1105017	1.7	20	43
D1105917	1.75	22	46
D1105018	1.8	22	46
D1105918	1.85	22	46
D1105019	1.9	22	46

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D1105919	1.95	24	49
D1105020	2.0	24	49
D1105920	2.05	24	49
D1105021	2.1	24	49
D1105921	2.15	27	53
D1105022	2.2	27	53
D1105922	2.25	27	53
D1105023	2.3	27	53
D1105923	2.35	27	53
D1105024	2.4	30	57
D1105924	2.45	30	57
D1105025	2.5	30	57
D1105925	2.55	30	57
D1105026	2.6	30	57
D1105926	2.65	30	57
D1105027	2.7	33	61
D1105927	2.75	33	61
D1105028	2.8	33	61
D1105928	2.85	33	61
D1105029	2.9	33	61
D1105929	2.95	33	61
D1105030	3.0	33	61
D1105930	3.05	36	65
D1105031	3.1	36	65
D1105931	3.15	36	65
D1105032	3.2	36	65

Unit : mm

▶ NEXT PAGE

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323																					
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)					Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS


JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

**KURZ
COURTE
CORTA**

- **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
- **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

- **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm
- **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphite.

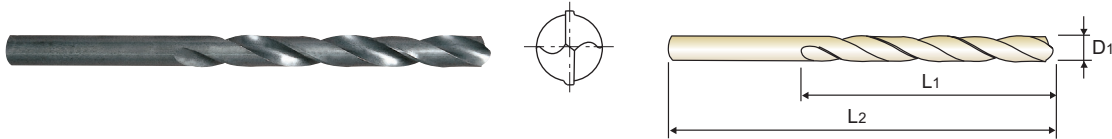

DIN 338
HSS
N 20~30°
h8
118°
P.276-277

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1105932	3.25	36	65	D1105945	4.55	47	80
D1105033	3.3	36	65	D1105046	4.6	47	80
D1105933	3.35	36	65	D1105946	4.65	47	80
D1105034	3.4	39	70	D1105047	4.7	47	80
D1105934	3.45	39	70	D1105947	4.75	47	80
D1105035	3.5	39	70	D1105048	4.8	52	86
D1105935	3.55	39	70	D1105948	4.85	52	86
D1105036	3.6	39	70	D1105049	4.9	52	86
D1105936	3.65	39	70	D1105949	4.95	52	86
D1105037	3.7	39	70	D1105050	5.0	52	86
D1105937	3.75	39	70	D1105950	5.05	52	86
D1105038	3.8	43	75	D1105051	5.1	52	86
D1105938	3.85	43	75	D1105951	5.15	52	86
D1105039	3.9	43	75	D1105052	5.2	52	86
D1105939	3.95	43	75	D1105952	5.25	52	86
D1105040	4.0	43	75	D1105053	5.3	52	86
D1105940	4.05	43	75	D1105953	5.35	57	93
D1105041	4.1	43	75	D1105054	5.4	57	93
D1105941	4.15	43	75	D1105954	5.45	57	93
D1105042	4.2	43	75	D1105055	5.5	57	93
D1105942	4.25	43	75	D1105955	5.55	57	93
D1105043	4.3	47	80	D1105056	5.6	57	93
D1105943	4.35	47	80	D1105956	5.65	57	93
D1105044	4.4	47	80	D1105057	5.7	57	93
D1105944	4.45	47	80	D1105957	5.75	57	93
D1105045	4.5	47	80	D1105058	5.8	57	93

Unit : mm

► NEXT PAGE

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	38	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N								S							H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials	Heat Resistant Super Alloys				Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

◎ : Excellent ○ : Good

Y/G STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS


KURZ

COURTE

CORTA

- ▶ **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
- ▶ **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

- ▶ **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm
- ▶ **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinterisen, Graphite.

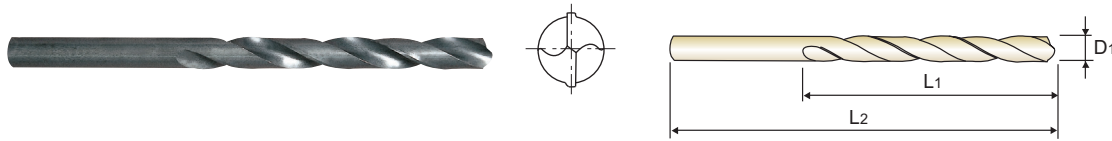

DIN 338
HSS
N 20~30°
h8
118°
P.276-277

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D1105958	5.85	57	93
D1105059	5.9	57	93
D1105959	5.95	57	93
D1105060	6.0	57	93
D1105960	6.05	63	101
D1105061	6.1	63	101
D1105961	6.15	63	101
D1105062	6.2	63	101
D1105962	6.25	63	101
D1105063	6.3	63	101
D1105963	6.35	63	101
D1105064	6.4	63	101
D1105964	6.45	63	101
D1105065	6.5	63	101
D1105965	6.55	63	101
D1105066	6.6	63	101
D1105966	6.65	63	101
D1105067	6.7	63	101
D1105967	6.75	69	109
D1105068	6.8	69	109
D1105968	6.85	69	109
D1105069	6.9	69	109
D1105969	6.95	69	109
D1105070	7.0	69	109
D1105970	7.05	69	109
D1105071	7.1	69	109

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D1105971	7.15	69	109
D1105072	7.2	69	109
D1105972	7.25	69	109
D1105073	7.3	69	109
D1105973	7.35	69	109
D1105074	7.4	69	109
D1105974	7.45	69	109
D1105075	7.5	69	109
D1105975	7.55	75	117
D1105076	7.6	75	117
D1105976	7.65	75	117
D1105077	7.7	75	117
D1105977	7.75	75	117
D1105078	7.8	75	117
D1105978	7.85	75	117
D1105079	7.9	75	117
D1105979	7.95	75	117
D1105080	8.0	75	117
D1105081	8.1	75	117
D1105082	8.2	75	117
D1105982	8.25	75	117
D1105083	8.3	75	117
D1105084	8.4	75	117
D1105085	8.5	75	117
D1105086	8.6	81	125
D1105087	8.7	81	125

Unit : mm

▶ NEXT PAGE

ISO	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					



STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS


JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

- KURZ**
- COURTE**
- CORTA**

- **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
- **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

- **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm
- **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sinter Eisen, Graphite.

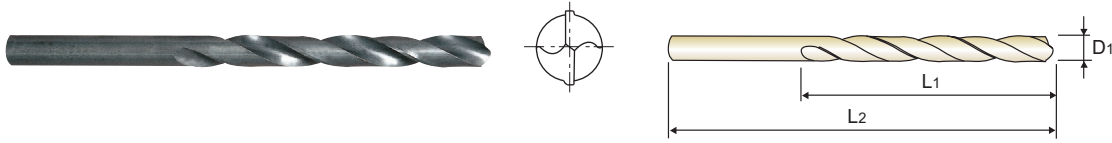

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1105987	8.75	81	125	D1105109	10.9	94	142
D1105088	8.8	81	125	D1105110	11.0	94	142
D1105089	8.9	81	125	D1105111	11.1	94	142
D1105090	9.0	81	125	D1105112	11.2	94	142
D1105091	9.1	81	125	D1105812	11.25	94	142
D1105092	9.2	81	125	D1105113	11.3	94	142
D1105992	9.25	81	125	D1105114	11.4	94	142
D1105093	9.3	81	125	D1105115	11.5	94	142
D1105094	9.4	81	125	D1105116	11.6	94	142
D1105095	9.5	81	125	D1105117	11.7	94	142
D1105096	9.6	87	133	D1105817	11.75	94	142
D1105097	9.7	87	133	D1105118	11.8	94	142
D1105997	9.75	87	133	D1105119	11.9	101	151
D1105098	9.8	87	133	D1105120	12.0	101	151
D1105099	9.9	87	133	D1105121	12.1	101	151
D1105100	10.0	87	133	D1105122	12.2	101	151
D1105101	10.1	87	133	D1105822	12.25	101	151
D1105102	10.2	87	133	D1105123	12.3	101	151
D1105802	10.25	87	133	D1105124	12.4	101	151
D1105103	10.3	87	133	D1105125	12.5	101	151
D1105104	10.4	87	133	D1105126	12.6	101	151
D1105105	10.5	87	133	D1105127	12.7	101	151
D1105106	10.6	87	133	D1105827	12.75	101	151
D1105107	10.7	94	142	D1105128	12.8	101	151
D1105807	10.75	94	142	D1105129	12.9	101	151
D1105108	10.8	94	142	D1105130	13.0	101	151

► NEXT PAGE

◎ : Excellent ○ : Good

ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N								S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials	Heat Resistant Super Alloys				Titanium Alloys			Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

Y/G STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER

- HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
- Forets HSS, queue cylindrique, série courte
- PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS


KURZ

COURTE

CORTA

- ▶ **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
- ▶ **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

- ▶ **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2mm
- ▶ **Verwendung** : Zum Bohren von Stahl und Stahlguß,
Grauguß, Temperguß, Sphäroguß,
Sintereisen, Graphite.

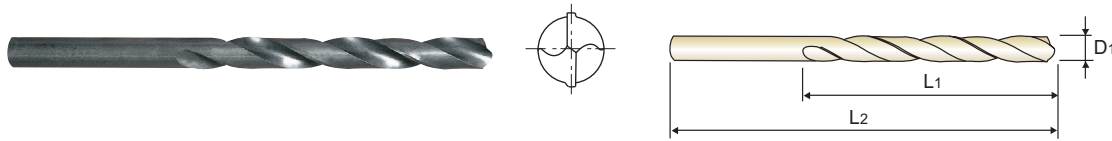

DIN 338
HSS
N 20~30°
h8
118°
P.276-277

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D1105832	13.25	108	160
D1105135	13.5	108	160
D1105837	13.75	108	160
D1105140	14.0	108	160
D1105842	14.25	114	169
D1105145	14.5	114	169
D1105847	14.75	114	169
D1105150	15.0	114	169
D1105852	15.25	120	178
D1105155	15.5	120	178
D1105857	15.75	120	178
D1105160	16.0	120	178
D1105862	16.25	125	184
D1105165	16.5	125	184

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D1105867	16.75	125	184
D1105170	17.0	125	184
D1105872	17.25	130	191
D1105175	17.5	130	191
D1105877	17.75	130	191
D1105180	18.0	130	191
D1105882	18.25	135	198
D1105185	18.5	135	198
D1105887	18.75	135	198
D1105190	19.0	135	198
D1105892	19.25	140	205
D1105195	19.5	140	205
D1105897	19.75	140	205
D1105200	20.0	140	205

◎ : Excellent ○ : Good

ISO	P										M					K				
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	◎	◎	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					



STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDPARAMETER

D2107, D1107, D2105, DL105, D1105, D1125, D2104, D1121, DL109 SERIES

**HSS, HSS-E & HSSCo8
COBALT DRILLS**

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)				
					2.0	3.0	4.0	6.0	8.0
P	1	Non-alloy steel	30	RPM FEED	4770 0.02~0.04	3180 0.03~0.05	2390 0.04~0.06	1590 0.05~0.08	1190 0.10~0.13
	2		25	RPM FEED	3980 0.02~0.04	2650 0.03~0.05	1990 0.04~0.06	1330 0.05~0.08	990 0.10~0.13
	3		20	RPM FEED	3180 0.02~0.04	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.10~0.13
	4		20	RPM FEED	3180 0.01~0.02	2120 0.01~0.03	1590 0.02~0.04	1060 0.02~0.05	800 0.03~0.06
	5								
	6	Low alloy steel	25	RPM FEED	3980 0.02~0.04	2650 0.03~0.05	1990 0.04~0.06	1330 0.05~0.08	990 0.10~0.13
	7		20	RPM FEED	3180 0.02~0.04	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.10~0.13
	8		20	RPM FEED	3180 0.01~0.02	2120 0.01~0.03	1590 0.02~0.04	1060 0.02~0.05	800 0.03~0.06
	9								
	10	High alloyed steel, and tool steel	15	RPM FEED	2390 0.02~0.04	1590 0.03~0.05	1190 0.04~0.06	800 0.05~0.08	600 0.10~0.13
	11								
M	12	Stainless steel	20	RPM FEED	3180 0.02~0.04	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.10~0.13
	13		15	RPM FEED	2390 0.02~0.04	1590 0.03~0.05	1190 0.04~0.06	800 0.05~0.08	600 0.10~0.13
	14		10	RPM FEED	1590 0.01~0.02	1060 0.01~0.03	800 0.02~0.04	530 0.02~0.05	400 0.03~0.06
K	15	Grey cast iron	30	RPM FEED	4770 0.02~0.04	3180 0.03~0.05	2390 0.04~0.06	1590 0.05~0.08	1190 0.10~0.13
	16		25	RPM FEED	3980 0.01~0.02	2650 0.01~0.03	1990 0.02~0.04	1330 0.02~0.05	990 0.03~0.06
	17	Nodular cast iron	30	RPM FEED	4770 0.02~0.04	3180 0.03~0.05	2390 0.04~0.06	1590 0.05~0.08	1190 0.10~0.13
	18								
	19	Malleable cast iron	25	RPM FEED	3980 0.02~0.04	2650 0.03~0.05	1990 0.04~0.06	1330 0.05~0.08	990 0.10~0.13
20									
N	21	Aluminum-wrought alloy	55	RPM FEED	8750 0.03~0.06	5840 0.05~0.09	4380 0.07~0.11	2920 0.12~0.16	2190 0.12~0.18
	22		55	RPM FEED	8750 0.03~0.06	5840 0.05~0.09	4380 0.07~0.11	2920 0.12~0.16	2190 0.12~0.18
	23	Aluminum-cast, alloyed	40	RPM FEED	6370 0.03~0.06	4240 0.05~0.09	3180 0.07~0.11	2120 0.12~0.16	1590 0.12~0.18
	24								
	25								
	26	Copper and Copper Alloys (Bronze / Brass)							
	27								
28									
29	Non Metallic Materials	20	RPM FEED	3180 0.02~0.04	2120 0.03~0.05	1590 0.04~0.06	1060 0.05~0.08	800 0.10~0.13	
30									
S	31	Heat Resistant Super Alloys							
	32								
	33								
	34								
	35								
36	Titanium Alloys	10	RPM FEED	1590 0.01~0.03	1060 0.02~0.04	800 0.03~0.05	530 0.04~0.07	400 0.05~0.08	
37									
H	38	Hardened steel							
	39								
40	Chilled Cast Iron								
41	Hardened Cast Iron								

SELECTION GUIDE



SERIES

	D2107	D1107	D2105
STANDARD	DIN1897	DIN1897	DIN338
LENGTH	STUB	STUB	JOBBER
SIZE MIN	D1.0	D1.0	D1.0
SIZE MAX	D31.0	D13.0	D20.0
PAGE	234	238	241
SURFACE TREATMENT	Gold Coloring	Steam Tempered	Gold Coloring

HSS, HSS-E & HSSCo8 STRAIGHT SHANK DRILLS

For General Purpose (Soft & Tough Materials)



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.276

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc			
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎
	4		About 0.75% C Annealed	270	28	○	○	○
	5		About 0.75% C Quenched & Tempered	300	32			
	6	Low alloy steel	Annealed	180	10	◎	◎	◎
	7		Quenched & Tempered	275	29	○	○	○
	8		Quenched & Tempered	300	32	○	○	○
	9		Quenched & Tempered	350	38			
	10		High alloyed steel, and tool steel	Annealed	200	15	○	○
	11	Quenched & Tempered		325	35			
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	○	◎
	13		Martensitic Quenched & Tempered	240	23	○	○	○
	14		Austenitic	180	10	○	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○
	18		Pearlitic	250	25			
	19		Ferritic	130		○	○	○
20	Malleable cast iron	Pearlitic	230	21				
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○
	22		Curable Hardened	100		○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			○	○
30	Rubber, Wood, etc.							
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Ni or Co Based Cured	350	38			
	35		Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
40	Chilled Cast Iron	Cast	400	42				
41	Hardened Cast Iron	Hardened	550	55				

