



UNCOATED

**E9A26** SERIES

TiAlN based COATED


**GAA26** SERIES

**HSS-PM, MULTI FLUTE 45°HELIX SHORT LENGTH ROUGHING - FINE**

- **HSS-PM, MULTI SCHNEIDEN 45°RECHTSSPIRALE KURZ SCHRUPFRÄSER - FEIN**
- **FRAISES HSS-PM, MULTI-DENTS RAVAGEUSE HÉLICE À 45° - PAS FINS, SÉRIE COURTE**
- **MULTI TAGL., ELICA 45°, PER SGROS., SERIE CORTA, BOMBATO FINE - HSS PM**

- ▶ High chip removal and minimizing breakages of cutting edges.
- ▶ Designed to machine carbon steels, alloyed steels, stainless steels
- ▶ YG-1's new developed TANK-POWER Coating suitable for high speed cutting

- ▶ Schnelle Spanabfuhr und Minimierung von Schneidkantenausbrüchen
- ▶ Geeignet zum Fräsen von Stahl, legiertem Stahl und rostfreier Stahl.
- ▶ Neuentwickelte Beschichtung für Hochgeschwindigkeitsfräsen.

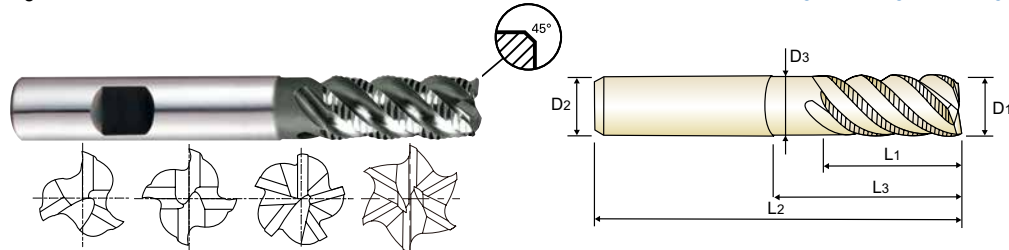

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	No. of Flute	Chamfer
UNCOATED	X-COATING	D1(js12)	D2(h6)	L1	L3	L2	D3		
E9A26040	GAA26040	4.0	6	11	-	57	-	3	0.1
E9A26050	GAA26050	5.0	6	13	-	57	-	4	0.13
E9A26060	GAA26060	6.0	6	13	-	57	-	4	0.15
E9A26070	GAA26070	7.0	10	16	-	66	-	4	0.15
E9A26080	GAA26080	8.0	10	19	-	69	-	4	0.18
E9A26090	GAA26090	9.0	10	19	-	69	-	4	0.18
E9A26100	GAA26100	10.0	10	22	31	72	9.5	4	0.20
E9A26120	GAA26120	12.0	12	26	37	83	11.5	4	0.20
E9A26140	GAA26140	14.0	12	26	-	83	-	5	0.20
E9A26160	GAA26160	16.0	16	32	44	92	15	5	0.20
E9A26180	GAA26180	18.0	16	32	-	92	-	6	0.20
E9A26200	GAA26200	20.0	20	38	54	104	19	6	0.20
E9A26250	GAA26250	25.0	25	45	63	121	24	6	0.20

**Tolerances according to DIN 7160 & 7161**

Tolerance range in $\mu\text{m}$						
Nominal-Diameter in mm						
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	$\pm 50$	$\pm 60$	$\pm 75$	$\pm 90$	$\pm 105$	$\pm 125$
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16



**Enforced Cutting Edge**


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend						○	○	○													

**GAA26** SERIES **MULTI FLUTE ROUGHING - SIDE CUTTING**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)									
						6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	25.0
P	1	Non-alloy steel	0.5D	1.5D	Vc	55	60	60	60	60	60	60	60	60	60
					fz	0.021	0.03	0.055	0.065	0.059	0.069	0.066	0.074	0.08	0.088
					RPM	2918	2387	1910	1592	1364	1194	1061	955	868	764
	FEED		245	286	420	414	402	412	420	424	417	403			
	2		Vc	40	50	45	45	45	50	50	50	45	45		
			fz	0.02	0.03	0.053	0.069	0.063	0.069	0.062	0.072	0.085	0.088		
			RPM	2122	1989	1432	1194	1023	995	884	796	651	573		
	FEED		170	239	304	329	322	343	329	344	332	303			
	3-4		Vc	30	35	35	35	35	35	35	35	30	35		
			fz	0.018	0.029	0.046	0.064	0.061	0.07	0.063	0.072	0.082	0.087		
RPM		1592	1393	1114	928	796	619	557	434	446					
FEED	115	162	205	238	243	244	234	241	214	233					
5	Vc	25	25	30	30	30	30	30	30	30	30				
	fz	0.02	0.03	0.045	0.061	0.057	0.065	0.061	0.068	0.075	0.083				
	RPM	1326	995	955	796	682	597	531	477	434	382				
FEED	106	119	172	194	194	194	194	195	195	190					
6	Vc	40	50	45	45	45	50	50	50	45	45				
	fz	0.02	0.03	0.053	0.069	0.063	0.069	0.062	0.072	0.085	0.088				
	RPM	2122	1989	1432	1194	1023	995	884	796	651	573				
FEED	170	239	304	329	322	343	329	344	332	303					
7	Vc	30	35	35	35	35	35	35	35	30	35				
	fz	0.018	0.029	0.046	0.064	0.061	0.07	0.063	0.072	0.082	0.087				
	RPM	1592	1393	1114	928	796	619	557	434	446					
FEED	115	162	205	238	243	244	234	241	214	233					
8-9	Vc	25	25	30	30	30	30	30	30	30	30				
	fz	0.02	0.03	0.045	0.061	0.057	0.065	0.061	0.068	0.075	0.083				
	RPM	1326	995	955	796	682	597	531	477	434	382				
FEED	106	119	172	194	194	194	194	195	195	190					
10	Vc	40	50	45	45	45	50	50	50	45	45				
	fz	0.02	0.03	0.053	0.069	0.063	0.069	0.062	0.072	0.085	0.088				
	RPM	2122	1989	1432	1194	1023	995	884	796	651	573				
FEED	170	239	304	329	322	343	329	344	332	303					
11.1	Vc	25	25	30	30	30	30	30	30	30	30				
	fz	0.02	0.03	0.045	0.061	0.057	0.065	0.061	0.068	0.075	0.083				
	RPM	1326	995	955	796	682	597	531	477	434	382				
FEED	106	119	172	194	194	194	194	195	195	190					
M	14.1	Stainless steel	0.5D	1.5D	Vc	25	30	30	30	30	30	30	30	30	
					fz	0.019	0.029	0.045	0.064	0.059	0.068	0.062	0.071	0.079	0.085
					RPM	1326	1194	955	796	682	597	531	477	434	382
FEED	101	138	172	204	201	203	197	203	206	195					
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.5D	1.5D	Vc	40	50	45	45	45	50	50	50	45	45
					fz	0.02	0.03	0.053	0.069	0.063	0.069	0.062	0.072	0.085	0.088
					RPM	2122	1989	1432	1194	1023	995	884	796	651	573
FEED	170	239	304	329	322	343	329	344	332	303					



# SELECTION GUIDE



SERIES	E9940 GA940	E9A32 GAA32	E9936 GA936	E9A29 GAA29
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	SQUARE	SQUARE
SIZE MIN	R0.5	R1.0	D1.0	D1.0
SIZE MAX	R12.5	R12.5	D25.0	D25.0
PAGE	640	641	642	643

CBN  
END MILLS

i-Xmill  
END MILLS

i-SMART  
MODULAR  
END MILLS

X5070  
END MILLS

4G MILL  
END MILLS

X-POWER  
PRO  
END MILLS

TitaNox-  
POWER  
END MILLS

JET-POWER  
END MILLS

V7 PLUS  
END MILLS

ALU-POWER  
HPC  
END MILLS

ALU-  
POWER  
END MILLS

D-POWER  
GRAPHITE  
END MILLS

D-POWER  
CFRP  
END MILLS

ROUTERS

CRX S  
END MILLS

K-2  
END MILLS

ONLY ONE  
COATED PM60  
END MILLS

TANK-  
POWER  
END MILLS

GENERAL  
HSS  
END MILLS

MILLING  
CUTTERS

TECHNICAL  
DATA

## HSS-PM TANK-POWER END MILLS

High Toughness, for Stainless Steels, Carbon steels, Alloy Steels  
For General Application, Rough & Finish



Please visit  
[globalyg1.com/mat](http://globalyg1.com/mat)  
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 654

	SHORT LENGTH	LONG LENGTH	SHORT LENGTH	LONG LENGTH
	TiAlN based	TiAlN based	TiAlN based	TiAlN based
P	◎	◎	◎	◎
M	◎	◎	◎	◎
K	◎	◎	◎	◎
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	
P	1	Non-alloy steel	About 0.15% C Annealed	125		
	2		About 0.45% C Annealed	190	13	
	3		About 0.45% C Quenched & Tempered	250	25	
	4		About 0.75% C Annealed	270	28	
	5		About 0.75% C Quenched & Tempered	300	32	
	6	Low alloy steel	Annealed	180	10	
	7		Quenched & Tempered	275	29	
	8		Quenched & Tempered	300	32	
	9		Quenched & Tempered	350	38	
	10		High alloyed steel, and tool steel	Annealed	200	15
	11			Quenched & Tempered	325	35
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	
	13		Martensitic Quenched & Tempered	240	23	
	14		Austenitic	180	10	
K	15	Grey cast iron	Pearlitic / ferritic	180	10	
	16		Pearlitic (Martensitic)	260	26	
	17	Nodular cast iron	Ferritic	160	3	
	18		Pearlitic	250	25	
	19	Malleable cast iron	Ferritic	130		
	20		Pearlitic	230	21	
N	21	Aluminum-wrought alloy	Not Curable	60		
	22		Curable Hardened	100		
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		
	24		≤ 12% Si, Curable Hardened	90		
	25		> 12% Si, Not Curable	130		
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		
	27		CuZn, CuSnZn (Brass)	90		
	28		CuSn, lead-free copper and electrolytic copper	100		
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			
	30		Rubber, Wood, etc.			
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	
	32		Fe Based Cured	280	30	
	33		Ni or Co Based Annealed	250	25	
	34		Ni or Co Based Cured	350	38	
	35	Ni or Co Based Cast	320	34		
	36	Titanium Alloys	Pure Titanium	400 Rm		
	37		Alpha + Beta Alloys Hardened	1050 Rm		
H	38	Hardened steel	Hardened	550	55	
	39		Hardened	630	60	
	40	Chilled Cast Iron	Cast	400	42	
	41	Hardened Cast Iron	Hardened	550	55	

E9942 GA942	E9A30 GAA30	E9938 GA938	E9A31 GAA31	E9941 GA941	E9A35 GAA35	E9A26 GAA26	E9A33 GAA33	E9A34 GAA34	E9E43 GAE43
3	3	4	4	Multi Flute	Multi Flute	Multi Flute	Multi Flute	Multi Flute	Multi Flute
30°	30°	30°	30°	30°	30°	45°	30°	30°	30°
SQUARE	SQUARE	SQUARE	SQUARE	ROUGHING	ROUGHING	ROUGHING	ROUGHING	ROUGHING	ROUGHING
D1.0	D1.0	D1.0	D2.0	D6.0	D6.0	D4.0	D6.0	D6.0	D10.0
D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0
644	645	646	647	648	649	650	651	652	653
STUB LENGTH	SHORT LENGTH	SHORT LENGTH	LONG LENGTH	SHORT LENGTH	LONG LENGTH	SHORT LENGTH	SHORT LENGTH	LONG LENGTH	WITH NECK
TiAlN based	TiAlN based	TiAlN based	TiAlN based	X-Coating	X-Coating	X-Coating	X-Coating	X-Coating	X-Coating



⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	1
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	2
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	3
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	4
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	5
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	6 P
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	7
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	8
○	○	○	○	○	○	○	○	○	○	9
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	10
○	○	○	○	○	○	○	○	○	○	11
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	12
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	13 M
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	14
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	15
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	16
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	17 K
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	18
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	19
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	20
										21
										22
										23
										24
										25
○	○	○	○	○	○	○	○	○	○	26 N
○	○	○	○	○	○	○	○	○	○	27
○	○	○	○	○	○	○	○	○	○	28
										29
										30
										31
										32
										33
										34 S
										35
										36
										37
										38
										39 H
										40
										41

CBN  
END MILLS

i-Xmill  
END MILLS

i-SMART  
MODULAR  
END MILLS

X5070  
END MILLS

4G MILL  
END MILLS

X-POWER  
PRO  
END MILLS

TitaNox-  
POWER  
END MILLS

JET-POWER  
END MILLS

V7 PLUS  
END MILLS

ALU-POWER  
HPC  
END MILLS

ALU-  
POWER  
END MILLS

D-POWER  
GRAPHITE  
END MILLS

D-POWER  
CFRP  
END MILLS

ROUTERS

CRX S  
END MILLS

K-2  
END MILLS

ONLY ONE  
COATED PM60  
END MILLS

TANK-  
POWER  
END MILLS

GENERAL  
HSS  
END MILLS

MILLING  
CUTTERS

TECHNICAL  
DATA