


HSS-PM, MULTI FLUTE LONG LENGTH ROUGHING - FINE

- HSS-PM, MULTI SCHNEIDEN LANG SCHRUPFRÄSER - FEIN
- FRAISES HSS-PM, MULTI-DENTS RAVAGEUSE - PAS FINS, SÉRIE LONGUE
- MULTI TAGL., PER SGROSSATURA, SERIE LUNGA, BOMBATO FINE - HSS PM

- ▶ Suitable for high-feed roughing milling.
- ▶ Designed to machine carbon steels, alloyed steels, stainless steels..
- ▶ Providing excellent finished surfaces in many cases.
- ▶ YG-1's new developed TANK-POWER Coating suitable for high speed cutting.
- ▶ up to $\varnothing 20$: center cut, over $\varnothing 20$: non center cut

- ▶ Geeignet zum HSC - Schrapp - Fräsen.
- ▶ Geeignet zum Fräsen von Stahl, legiertem Stahl und rostfreier Stahl.
- ▶ Liefert in vielen Fällen exzellente bearbeitete Oberflächen.
- ▶ Neuentwickelte Beschichtung für Hochgeschwindigkeitsfräsen.
- ▶ Bis D=20mm : Mit Zentrumschneide, über D=20mm : Ohne Zentrumschneide.

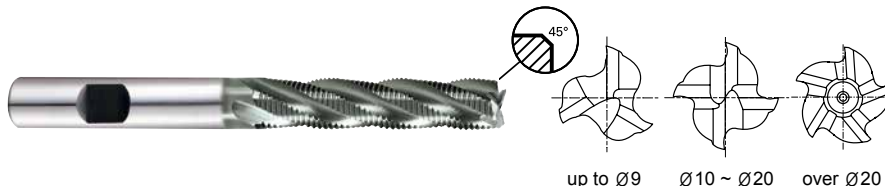


HSS PM DIN 844 HR 3-5 30° DIN 1835B ~Ø20 Ø22~ C x 45° P.664~665

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer
UNCOATED	X-COATING	js12	h6				
E9A35060	GAA35060	6.0	6	24	68	3	0.18
E9A35070	GAA35070	7.0	10	30	80	3	0.18
E9A35080	GAA35080	8.0	10	38	88	3	0.18
E9A35090	GAA35090	9.0	10	38	88	3	0.18
E9A35100	GAA35100	10.0	10	45	95	4	0.18
E9A35120	GAA35120	12.0	12	53	110	4	0.18
E9A35140	GAA35140	14.0	12	53	110	4	0.25
E9A35160	GAA35160	16.0	16	63	123	4	0.25
E9A35180	GAA35180	18.0	16	63	123	4	0.25
E9A35200	GAA35200	20.0	20	75	141	4	0.25
E9A35220	GAA35220	22.0	20	75	141	5	0.36
E9A35250	GAA35250	25.0	25	90	166	5	0.36

Tolerances according to DIN 7160 & 7161

	Tolerance range in μm					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	± 50	± 60	± 75	± 90	± 105	± 125
h6	0 - 6	0 - 8	0 - 9	0 - 11	0 - 13	0 - 16

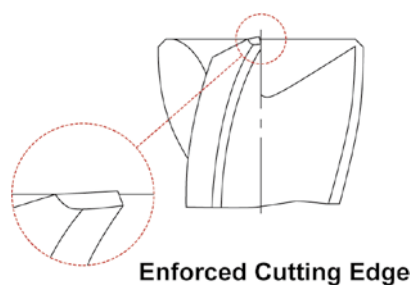

◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323																					
HRc	125	130	135	140	145	150	155	160	165	170	175	180	185	190	195	200	205	210	215	220	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	


ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	40	55	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend						○	○	○													

GA941 , GAA35 , GAA33 , GAA34 SERIES MULTI FLUTE ROUGHING - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)									
						6.0	8.0	10.0	12.0	22.0	25.0	18.0	20.0	22.0	25.0
P	1	Non-alloy steel	0.5D	1.5D	Vc	55	60	60	60	60	60	60	60	60	60
					fz	0.027	0.04	0.055	0.065	0.074	0.086	0.099	0.111	0.096	0.105
					RPM	2918	2387	1910	1592	1364	1194	1061	955	868	764
	2		Vc	40	50	45	45	45	50	50	50	45	45		
			fz	0.027	0.04	0.053	0.069	0.079	0.087	0.093	0.109	0.102	0.105		
			RPM	2122	1989	1432	1194	1023	995	884	796	651	573		
	3-4		Vc	30	35	35	35	35	35	35	35	30	35		
			fz	0.024	0.038	0.046	0.064	0.076	0.087	0.094	0.108	0.098	0.105		
			RPM	1592	1393	1114	928	796	619	557	434	446			
	5		Vc	25	25	30	30	30	30	30	30	30	30		
fz		0.027	0.04	0.045	0.061	0.071	0.082	0.092	0.102	0.09	0.1				
RPM		1326	995	955	796	682	597	531	477	434	382				
6	Vc	40	50	45	45	45	50	50	50	45	45				
	fz	0.027	0.04	0.053	0.069	0.079	0.087	0.093	0.109	0.102	0.105				
	RPM	2122	1989	1432	1194	1023	995	884	796	651	573				
7	Vc	30	35	35	35	35	35	35	35	30	35				
	fz	0.024	0.038	0.046	0.064	0.076	0.087	0.094	0.108	0.098	0.105				
	RPM	1592	1393	1114	928	796	619	557	434	446					
8-9	Vc	25	25	30	30	30	30	30	30	30	30				
	fz	0.027	0.04	0.045	0.061	0.071	0.082	0.092	0.102	0.09	0.1				
	RPM	1326	995	955	796	682	597	531	477	434	382				
10	Vc	40	50	45	45	45	50	50	50	45	45				
	fz	0.027	0.04	0.053	0.069	0.079	0.087	0.093	0.109	0.102	0.105				
	RPM	2122	1989	1432	1194	1023	995	884	796	651	573				
11.1	Vc	25	25	30	30	30	30	30	30	30	30				
	fz	0.027	0.04	0.045	0.061	0.071	0.082	0.092	0.102	0.09	0.1				
	RPM	1326	995	955	796	682	597	531	477	434	382				
M	14.1	Stainless steel	0.5D	1.5D	Vc	25	30	30	30	30	30	30	30	30	
					fz	0.025	0.039	0.045	0.064	0.074	0.085	0.093	0.107	0.095	0.103
					RPM	1326	1194	955	796	682	597	531	477	434	382
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.5D	1.5D	Vc	40	50	45	45	45	50	50	50	45	45
					fz	0.027	0.04	0.053	0.069	0.079	0.087	0.093	0.109	0.102	0.105
					RPM	2122	1989	1432	1194	1023	995	884	796	651	573
FEED						172	239	304	329	323	346	329	347	332	301

※ The FEED, in long & extra long types, should be reduced by around 50%



SELECTION GUIDE



SERIES	E9940 GA940	E9A32 GAA32	E9936 GA936	E9A29 GAA29
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	30°	30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	SQUARE	SQUARE
SIZE MIN	R0.5	R1.0	D1.0	D1.0
SIZE MAX	R12.5	R12.5	D25.0	D25.0
PAGE	640	641	642	643

HSS-PM TANK-POWER END MILLS

High Toughness, for Stainless Steels, Carbon steels, Alloy Steels
For General Application, Rough & Finish



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 654

	SHORT LENGTH	LONG LENGTH	SHORT LENGTH	LONG LENGTH
	TiAlN based	TiAlN based	TiAlN based	TiAlN based
P	◎	◎	◎	◎
M	◎	◎	◎	◎
K	◎	◎	◎	◎
N	○	○	○	○
S	○	○	○	○
H	○	○	○	○

- CBN END MILLS
- i-Xmill END MILLS
- i-SMART MODULAR END MILLS
- X5070 END MILLS
- 4G MILL END MILLS
- X-POWER PRO END MILLS
- TitaNox-POWER END MILLS
- JET-POWER END MILLS
- V7 PLUS END MILLS
- ALU-POWER HPC END MILLS
- ALU-POWER END MILLS
- D-POWER GRAPHITE END MILLS
- D-POWER CFRP END MILLS
- ROUTERS
- CRX S END MILLS
- K-2 END MILLS
- ONLY ONE COATED PM60 END MILLS
- TANK-POWER END MILLS
- GENERAL HSS END MILLS
- MILLING CUTTERS
- TECHNICAL DATA

E9942 GA942	E9A30 GAA30	E9938 GA938	E9A31 GAA31	E9941 GA941	E9A35 GAA35	E9A26 GAA26	E9A33 GAA33	E9A34 GAA34	E9E43 GAE43
3	3	4	4	Multi Flute	Multi Flute	Multi Flute	Multi Flute	Multi Flute	Multi Flute
30°	30°	30°	30°	30°	30°	45°	30°	30°	30°
SQUARE	SQUARE	SQUARE	SQUARE	ROUGHING	ROUGHING	ROUGHING	ROUGHING	ROUGHING	ROUGHING
D1.0	D1.0	D1.0	D2.0	D6.0	D6.0	D4.0	D6.0	D6.0	D10.0
D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0
644	645	646	647	648	649	650	651	652	653
STUB LENGTH	SHORT LENGTH	SHORT LENGTH	LONG LENGTH	SHORT LENGTH	LONG LENGTH	SHORT LENGTH	SHORT LENGTH	LONG LENGTH	WITH NECK
TiAlN based	TiAlN based	TiAlN based	TiAlN based	X-Coating	X-Coating	X-Coating	X-Coating	X-Coating	X-Coating



⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	1
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	2
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	3
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	4
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	5
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	6 P
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	7
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	8
○	○	○	○	○	○	○	○	○	○	9
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	10
○	○	○	○	○	○	○	○	○	○	11
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	12
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	13 M
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	14
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	15
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	16
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	17 K
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	18
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	19
⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	20
										21
										22
										23
										24
										25
○	○	○	○	○	○	○	○	○	○	26 N
○	○	○	○	○	○	○	○	○	○	27
○	○	○	○	○	○	○	○	○	○	28
										29
										30
										31
										32
										33
										34 S
										35
										36
										37
										38
										39 H
										40
										41

CBN
END MILLS

i-Xmill
END MILLS

i-SMART
MODULAR
END MILLS

X5070
END MILLS

4G MILL
END MILLS

X-POWER
PRO
END MILLS

TitaNox-
POWER
END MILLS

JET-POWER
END MILLS

V7 PLUS
END MILLS

ALU-POWER
HPC
END MILLS

ALU-
POWER
END MILLS

D-POWER
GRAPHITE
END MILLS

D-POWER
CFRP
END MILLS

ROUTERS

CRX S
END MILLS

K-2
END MILLS

ONLY ONE
COATED PM60
END MILLS

TANK-
POWER
END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA