


Turning Inserts - Positive RCMT (Round)

Refer to
Turning holder
p. 108, 132



Series	IC	S	Series	IC	S
RC** 0602	6	2.38	RC** 10T3	10	3.97
RC** 0803	8	3.18	RC** 1204	12	4.76

EDP 2200.. ● : Stock item ○ : Order made item

					Order made item										Order made item									
					K10	P05	K20	P10	P15	P10	P25	P20	P30	P20	M25	M35	M15	M30	M40	S10	P15	P10	N20	N25
					K20	K30	K30	K30										S30	K15	K10				
RCMT	Designation	RE	F _n (mm/rev.)	A _p (mm)	YG1010	YG1001	YG1020	YG3010	YG3015	YG3115	YG3125	YG3020	YG3030	YG801	YG2025	YG2035	YG211	YG213	YG214	YG401	YT100	YT100G	YG100	YG10
 General	RCMT 0602M0	3.0	0.05-0.25	0.2-1.2	●	○	●	○		●	●	●	●	○			○							
					2057	0374	3549	0375		2624	3256	0376	1151	0023				2233						
	RCMT 0803M0	4.0	0.05-0.30	0.5-1.5	●	○	●	○		●	●	●	●	○			○							
					2058	0377	3550	0378		2625	3257	0379	1152	0024				2234						
	RCMT 10T3M0	5.0	0.10-0.35	0.5-2.5	●	○	●	○		●	●	●	●	○			○							
					2059	0380	3551	0381		2626	3258	0382	1153	0021				2231						
	RCMT 1204M0	6.0	0.15-0.45	0.5-3.0	●	○	●	○		●	●	●	●	○			○							
					1833	0383	3531	0384		2627	3259	0385	1170	0022				2232						
 General	RCMT 0602M0 - SM	3.0	0.12-0.33	0.3-1.6																●				
																				2571				
	RCMT 0803M0 - SM	4.0	0.15-0.41	0.3-2.0																	●			
																				2570				
	RCMT 10T3M0 - SM	5.0	0.17-0.46	0.4-2.5																	●			
																				2572				
	RCMT 1204M0 - SM	6.0	0.20-0.56	0.5-3.0	●					●					●					●				
					3159					2573					3173					2569				
	RCMT 1606M0 - SM	8.0	0.25-0.77	0.7-4.0																●				
																				3151				

Product Overview

Turning Grades Map

Speed : Vc (m/min.)
Feed : Fn (mm/rev.)







TURNING

PARTING & GROOVING

MILLING

DRILLING

TECHNICAL INFORMATION

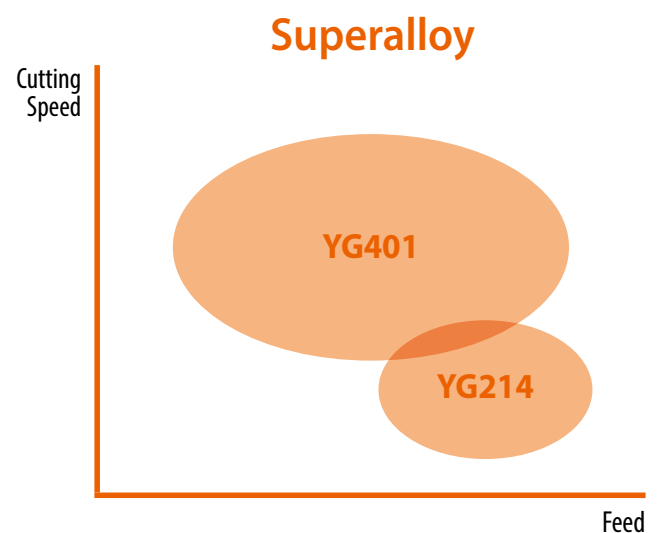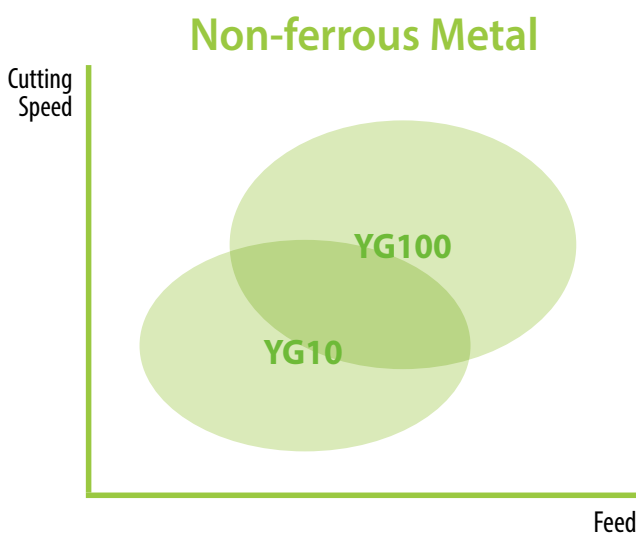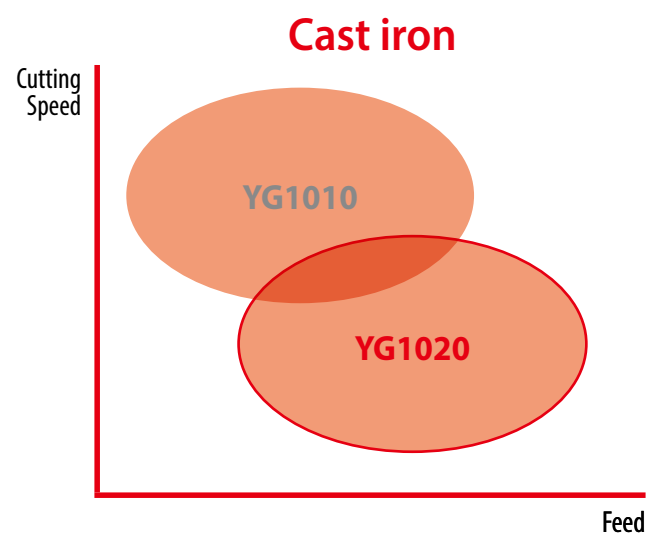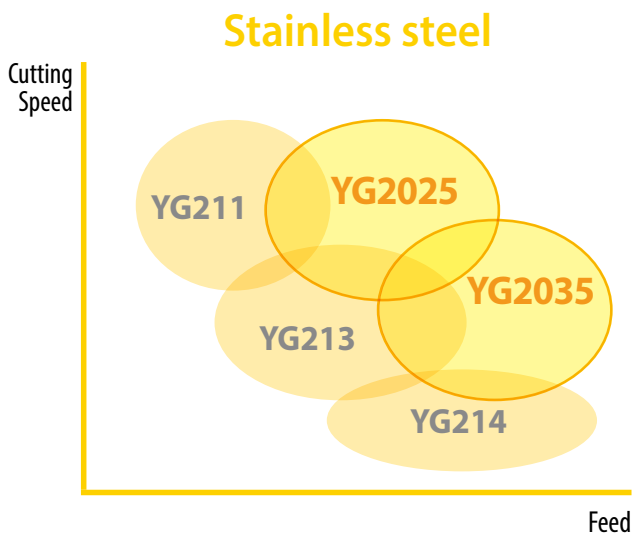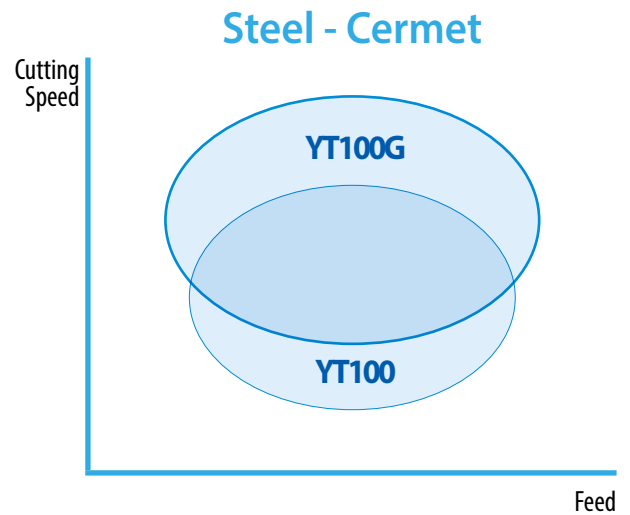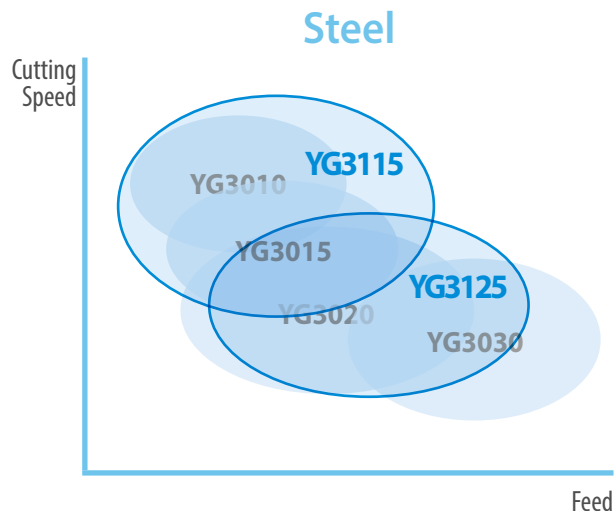

Product Overview

Turning Grades

	Turning Grades	P Steel				M Stainless steel			K Cast iron			N Non-ferrous		S Superalloys	
		P10	P20	P30	P40	M10	M20	M30	K10	K20	K30	N10	N20	S10	S20
TURNING	YG1010								1010						
	YG1001	1001							1001						
	YG1020								1020						
	YG3010	3010							3010						
	YG3015	3015													
	YG3115	3115													
	YG3125	3125													
	YG3020	3020													
	YG3030	3030													
	YG2025					2025									
	YG2035						2035								
PARTING & GROOVING	YG801	801													
	YG211					211									
	YG213					213									
	YG214					214									214
	YG401													401	
MILLING	YG2025					2025									
	YG2035						2035								
	YG801	801													
CERMET	YT100	YT100				YT100			YT100						
	YT100G	YT100G				YT100G			YT100G						
	YT100G	YT100G				YT100G			YT100G						
DLC	YG100											100			
	YG10											10			

DRILLING	YG1010 K05 - K15		First Choice for Cast Iron - Effective coating structure enables high speed machining - Special post treatment for improved chipping resistance
	YG1001 P01 - P10 K10 - K25		Stable Machining of Cast Iron - Substrate especially designed for high wear resistance - Thick Al₂O₃ layer ensures good wear resistance at high cutting speeds including dry machining
TECHNICAL INFORMATION	NEW YG1020 K15 - K25		First choice for ductile cast iron - Excellent wear and fracture resistance when machining ductile cast iron - New coating ensures outstanding resistance to abrasion wear
	YG3010 P05 - P20 K15 - K35		First choice for Finishing Steels, and Ductile Cast iron - Finishing and light machining of steel under in stable condition - New Al₂O₃ coating technology and excellent surface smoothness increase wear resistance and chipping resistance
	YG3015 P10 - P25		Balanced Productivity for Continuous cut High wear resistance and improved toughness ensures high productivity with less trouble
	YG3115 P15 - P25		First choice grade for high cutting speed in Steels - Suitable for mass production due to stable and predictable tool life - Minimizing built up edge due to new post surface treatment in mild steels, low carbon steel and low carbon alloy steel. - Best choice for both continuous as well as interrupted cuts
	NEW YG3125 P20 - P30		Recommended first grade for steel - New substrates with a unique combination of good toughness and plastic deformation resistance - General Machining on steel

Product Overview

Turning Grades







TURNING PARTING & GROOVING MILLING DRILLING TECHNICAL INFORMATION	YG3020 P15 - P30		First Choice Grade for General Steel Application • Substrate especially designed for good toughness • Excellent surface smoothness increases wear resistance and reliability
	YG3030 P20 - P35		Interrupted Cutting of Steel and Stainless steel • Substrate for heavy roughing in mild steel and low carbon alloy steel • New Al₂O₃ technology and optimized surface treatment achieves a good balance between wear resistance and chipping resistance
	YG801 P10 - P30		for Carbon Steel with Low Cutting Speed • Recommended for mild steel and boring application • Substrate and special PVD coating for excellent wear resistance
	YG2025 M15 - M35		CVD grade for High Cutting Speed for Stainless steel • Utilizing a new carbide substrate and new coating • Excellent combination of wear resistance and chipping resistance • Minimized built up edge due to post surface treatment
	NEW YG2035 M30 - M40		CVD Coated Grade for stainless steel at Low Cutting Speed • Substrate withstands heavy interruption, while the coating provides the wear resistance needed for a long tool life • Smooth surface resists build-up edge, even at low cutting speeds
	YG211 M05 - M25		High wear Resistance Grade for Stainless steel • Finishing Stainless steel
	YG213 M20 - M35		First Choice Grade on Low Cutting Speed of Stainless steel • First choice on Stainless steel for Low cutting speed • For Medium to low cutting speed
	YG214 M30 - M40 S25 - S30		Heavy Interrupted cut for Stainless steel • For Heavy Interrupted cut on Stainless steel • Minimize risk of Mechanical fracture or Chipping
	YG401 S10 - S20		PVD Turning Grade for HRSA • Highly heat-resistant TiAlSiN structure for excellent wear resistance • Greatly improved film coating realizes excellent boundary defect resistance • Top coating layer provides a smooth surface and lubricant effect
	YT100 P10 - P20 M10 - M20 K10 - K20		New Generation Cermet Grade • Enhanced wear resistance & chipping resistance • Excellent fracture resistance • Superior surface finish with special edge preparation
	NEW YT100G P5 - P20 M5 - M20 K5 - K20		PVD-coated Cermet grade for turning • Outstanding wear resistance and a low coefficient of friction enable high-speed turning of steels, stainless steels, and cast irons with extended tool life
	YG100 N05 - N25		First Choice Grade for Aluminum with DLC Coating • Submicron carbide for high wear resistance • DLC coating minimizes Built Up Edge tendency. • Improve tool life in sticky non-ferrous alloy
	YG10 N05 - N25		Uncoated Grade for General Aluminum • Substrate consisted of submicron carbide for high wear resistance • Shining surface to prevent built up edge

Product Overview

Turning Chipbreakers - Positive

	P M K N S							Feed							Fn (mm/rev.)
	P	M	K	N	S			0	0.1	0.2	0.3	0.4	0.5	0.6	
TURNING				N		AL		Fn 0.02~0.30 Ap 0.1~5.0							
	P	M				UF		Fn 0.05~0.25 Ap 0.5~2.0							
PARTING & GROOVING	P		K			UG		Fn 0.15~0.30 Ap 0.5~2.5							
		M				MF		Fn 0.04~0.30 Ap 0.1~2.0							
MILLING		M				MM		Fn 0.06~0.35 Ap 0.25~3.0							
				S		SF		Fn 0.03~0.20 Ap 0.1~2.5							
DRILLING	P	M	K			PF		Fn 0.06~0.25 Ap 0.1~2.0							
	P	M	K			PM		Fn 0.08~0.25 Ap 0.25~3.0							
								Depth of Cut							Ap (mm)

TECHNICAL INFORMATION



*Insert : CCMT09T304

Insert ISO Code System

*Metric : According to ISO 1832

page 14

page 12

TURNING

PARTING & GROOVING

MILLING

DRILLING

TECHNICAL INFORMATION



1	2	3	4	5	6	7	8	9
C	N	M	G	12	04	08	-UG	YG3115
Shape	Clearance	Tolerance	Clamping & Chipbreaker	Insert Size	Insert Thickness	Corner Radius	Chipbreaker Geometry	Grade

1 - Shape

Symbol	Shape
H	Hexagonal
O	Octagonal
P	Pentagonal
S	Square
T	Triangular
C	Rhombic 80°
D	Rhombic 55°
V	Rhombic 35°
W	Trigon
L	Rectangular
K	Parallelogram 55°
R	Round

2 - Relief Angle (AN)

Symbol	Relief Angle (AN)
N	No Relief Angle
B	Relief 5°
C	Relief 7°
P	Relief 11°
D	Relief 15°
E	Relief 20°
F	Relief 25°
O	Special



3 - Tolerance Class

Symbol	Inner Circle IC (mm)	Nose Height M (mm)	Thickness S (mm)
C	± 0.025	± 0.013	± 0.025
E	± 0.025	± 0.025	± 0.025
G	± 0.025	± 0.025	± 0.13
H	± 0.013	± 0.013	± 0.025
K*	± 0.05~0.15*	± 0.013	± 0.025
M*	± 0.05~0.15*	± 0.08~0.2*	± 0.13
U*	± 0.08~0.25*	± 0.13~0.38*	± 0.13

* Tolerance is different by insert IC size. Please see ISO 1832

4 - Clamping & Chipbreaker

Symbol	Clamping	Chipbreaker	Figure
N	No clamping hole	X	
R		One Face	
A	Cylindrical Clamping hole	X	
M		One Face	
G		Both Faces	
W	Screw Hole	X	
T		One Face	
U		Both Faces	
X		Special	

Insert ISO Code System

*Inch



page 14

page 12

1	2	3	4	5	6	7	8	9
C	N	M	G	4	3	2	-UG	YG3115
Shape	Clearance	Tolerance	Clamping & Chipbreaker	Insert Size	Insert Thickness	Corner Radius	Chipbreaker Geometry	Grade

5 - Insert Size

Metric							Inner Circle IC (mm)	Inch
06	11	06	07	11			6.35	2
07	13	08	09	13	15		7.94	2.5
09	16	09	11	16	06	09 (00)	9.525	3
12	22	12	15	22	08	12 (00)	12.7	4
15	27	16	19	27	10		15.875	5
19	33	19	23	33	13		19.05	6
25		25					25.4	8
						06 (M0)	6	
						08 (M0)	8	
						10 (M0)	10	
						12 (M0)	12	
						16 (M0)	16	



6 - Insert Thickness (S)

Metric	Thickness - S (mm)	Inch
T1	1.98	1.2
02	2.38	1.5
03	3.18	2
T3	3.97	2.5
04	4.76	3
05	5.56	3.5
06	6.35	4
07	7.94	5
09	9.525	6

7 - Corner Radius (RE)

Metric	Corner Radius - RE (mm)	Inch
01	0.1	03
02	0.2	05
04	0.4	1
08	0.8	2
12	1.2	3
16	1.6	4
20	2.0	5
24	2.4	6

Grade Naming System

TURNING

1	2	3	4	5	(6)
YG	3	1	1	5	(G)
YG Brand	Workpiece Material	Grade Version	Application Range (1st Digit)	Application Range (2nd Digit)	Minor Variation
Carbide CVD (4 Digits)	●	●	●	●	YG3115
Carbide PVD (3 Digits)	●	●	●		YG211
Carbide Uncoated (2 Digits)	●	●			YG10

PARTING & GROOVING

1 - YG Brand

2 - Workpiece Material

Symbol	Workpiece Material	Turning	Milling	Drilling	Parting
1	K Cast Iron or N Non-Ferrous	●			
2	M Stainless Steel	●			
3	P Steel	●			
4	S Superalloys	●			
5	K Cast Iron or N Non-Ferrous		●	●	●
6	M Stainless Steel or Universal		●	●	●
7	P Steel		●	●	●
8	Universal	●			
9	Exotic Material		●		
0	Hardened Steel		●		

3 - Grade Version

4 & 5 - Application Range

Symbol	
05	 Wear Resistant Grade Stable Application Continuous Cut Finishing
10	
15	
20	 Balanced Grade High Versatility General Application
25	
30	
35	 Tougher Grade Unstable Application Interrupted Cut Chipping Resistance Roughing
40	
45	

(6) - (Minor Variation)

G - Gold Coated Version