


6 FLUTE CORNER RADIUS EXTRA LONG LENGTH CHIP SPLITTER

- **VOLLHARTMETALL, 6 SCHNEIDEN ECKRADIUS EXTRA LANG SPANTEILER**
- **CARBURE, 6 dents, extra-longue, fendeur des copeaux**
- **MD, 6 TAGLIENTI, TORICA, SERIE EXTRA LUNGA CON ROMPI TRUCIOLO**

- ▶ Special chip splitter design for better chip removal shortened chip length at high axial machining
- ▶ High Performance for Steels, Stainless Steels and Cast Iron
- ▶ Spezielles Spanteilerdesign für verbesserte Spanabfuhr durch kurze Späne bei hohem axialen Eingriff
- ▶ Hohe Leistung bei der Bearbeitung von Stählen, rostfreien Stählen und Gusseisen.

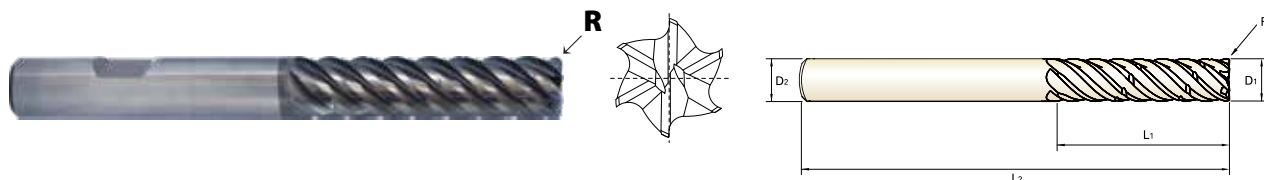

CARBIDE 6 45° PLAIN FLAT Coating Y p.C439

Recommended ToolHolder	Flat Shank		Plain Shank	
	END MILL HOLDER	Page	POWER MILLING CHUCK	Page
⊙	D118-137	-	D161-176	-
○	-	-	SHRINK FIT HOLDER	D47-72
○	-	-	HYDRAULIC CHUCK	D15-46
			ER COLLET CHUCK	D/3-116
			SK SLIM CHUCK	D183-201

Unit : mm

EDP No.		Corner Radius	Mill Diameter D1	Shank Diameter D2	Length of Cut L1	Overall Length L2
PLAIN	FLAT					
GMH58916	GMH59916	R3.0	20.0	20	80	150
GMH58917	GMH59917	R4.0	20.0	20	80	150
GMH58918	GMH59918	R5.0	20.0	20	80	150
GMH58250	GMH59250	R1.0	25.0	25	100	170
GMH58919	GMH59919	R1.5	25.0	25	100	170
GMH58920	GMH59920	R2.0	25.0	25	100	170
GMH58921	GMH59921	R3.0	25.0	25	100	170
GMH58922	GMH59922	R4.0	25.0	25	100	170
GMH58923	GMH59923	R5.0	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5
	* Shank Dia. ≥ Ø12 : h6

⊙ : Excellent ○ : Good


ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	3	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
ISO Material Description	N									S						H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

GMH58 GMH59 GMH56 GMH57 6 FLUTE CHIP SPLITTER - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	5	Low alloy steel	0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	6-7	Low alloy steel	0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	8-9	Low alloy steel	0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	10-11.1	High alloyed steel, and tool steel	0.05D	3.0D	Vc	100	100	100	100	100	100	100
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.144
					RPM	5305	3979	3183	2653	1989	1592	1273
					FEED	1305	1695	1681	1671	1468	1308	1100
M	12-13	Stainless steel	0.05D	3.0D	Vc	215	215	215	215	215	215	215
					fz	0.049	0.084	0.104	0.125	0.146	0.162	0.168
					RPM	11406	8555	6844	5703	4277	3422	2737
					FEED	3353	4312	4270	4277	3747	3326	2759
	14.1	Stainless steel	0.05D	3.0D	Vc	145	145	145	145	145	145	145
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.143
					RPM	7692	5769	4615	3846	2885	2308	1846
					FEED	1892	2458	2437	2423	2129	1897	1584
	14.2	Stainless steel	0.05D	3.0D	Vc	135	135	135	135	135	135	135
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.142
					RPM	7162	5371	4297	3581	2686	2149	1719
					FEED	1762	2288	2269	2256	1982	1766	1464
K	15-20	Grey cast iron	0.05D	3.0D	Vc	225	225	225	225	225	225	225
					fz	0.082	0.139	0.173	0.208	0.242	0.270	0.278
					RPM	11937	8952	7162	5968	4476	3581	2865
					FEED	5844	7477	7426	7434	6510	5801	4785
S	31-35	Heat Resistant Super Alloys	0.05D	3.0D	Vc	35	35	35	35	35	35	35
					fz	0.033	0.055	0.070	0.082	0.097	0.112	0.115
					RPM	1857	1393	1114	928	696	557	446
					FEED	368	460	468	457	405	374	307
	36-37	Titanium Alloys	0.05D	3.0D	Vc	115	115	115	115	115	115	115
					fz	0.033	0.055	0.070	0.083	0.097	0.113	0.117
					RPM	6101	4576	3661	3050	2288	1830	1464
					FEED	1208	1510	1537	1519	1332	1241	1028

(*) : If product's Length of Cut(L.O.C) is below 2D, it must be applied with L.O.C x 90%



SELECTION GUIDE

HSS



SERIES	GMG55 GMG56	GMF54 GMF55	GMF58 GMF59
FLUTE	4	4	4
HELIX ANGLE	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)
CUTTING EDGE SHAPE	BALL NOSE	CORNER RADIUS	CORNER RADIUS
SIZE MIN	R1.5	D3.0	D3.0
SIZE MAX	R12.5	D20.0	D25.0
PAGE	C418	C419	C420

CBN
END MILLS

i-Xmill
END MILLS

i-SMART
MODULAR
END MILLS

X5070
END MILLS

4G MILL
END MILLS

X-POWER
PRO
END MILLS

TitaNox-
POWER
END MILLS

JET-POWER
END MILLS

V7 PLUS
END MILLS

ALU-POWER
HPC
END MILLS

ALU-
POWER
END MILLS

D-POWER
GRAPHITE
END MILLS

CRX S
END MILLS

K-2
END MILLS

ONLY ONE
COATED PM60
END MILLS

TANK-
POWER
END MILLS

GENERAL
HSS
END MILLS

MILLING
CUTTERS

TECHNICAL
DATA

SOLID CARBIDE
V7 PLUS
END MILLS

High performance carbide end mills for Steels, Cast Iron and Stainless Steels



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p. C436



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	GMG55 GMG56	GMF54 GMF55	GMF58 GMF59
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎
	6	Low alloy steel	Annealed	180	10	◎	◎	◎
	7		Quenched & Tempered	275	29	◎	◎	◎
	8		Quenched & Tempered	300	32	◎	◎	◎
	9		Quenched & Tempered	350	38	◎	◎	◎
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	◎
	11	Quenched & Tempered		325	35	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	◎	◎	◎
	13		Martensitic Quenched & Tempered	240	23	◎	◎	◎
	14		Austenitic	180	10	◎	◎	◎
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎	◎
	16		Pearlitic (Martensitic)	260	26	◎	◎	◎
	17	Nodular cast iron	Ferritic	160	3	◎	◎	◎
	18		Pearlitic	250	25	◎	◎	◎
	19	Malleable cast iron	Ferritic	130		◎	◎	◎
	20		Pearlitic	230	21	◎	◎	◎
N	21	Aluminum-wrought alloy	Not Curable	60				
	22		Curable Hardened	100				
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75				
	24		≤ 12% Si, Curable Hardened	90				
	25		> 12% Si, Not Curable	130				
	26	Copper and Copper Alloys	Cutting Alloys, PB>1%	110				
	27		CuZn, CuSnZn (Brass)	90				
	28	Copper and Copper Alloys (Bronze / Brass)	CuSn, lead-free copper and electrolytic copper	100				
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30	Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	○	○	○
	32		Cured	280	30	○	○	○
	33		Annealed	250	25	○	○	○
	34		Ni or Co Based Cured	350	38	○	○	○
	35		Cast	320	34	○	○	○
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○
	37		Alpha + Beta Alloys Hardened	1050 Rm		○	○	○
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			

