


CARBIDE, 2 FLUTE for RIB PROCESSING

-  **VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN**
-  **Fraise carbure, 2 dents pour usinage de rainure**
-  **2 TAGLIENTI, SCARICATA PER NERVATURE**

- Improvement of tool life by applying new coating.
- Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- Enge Toleranzen für die Präzisionsbearbeitung

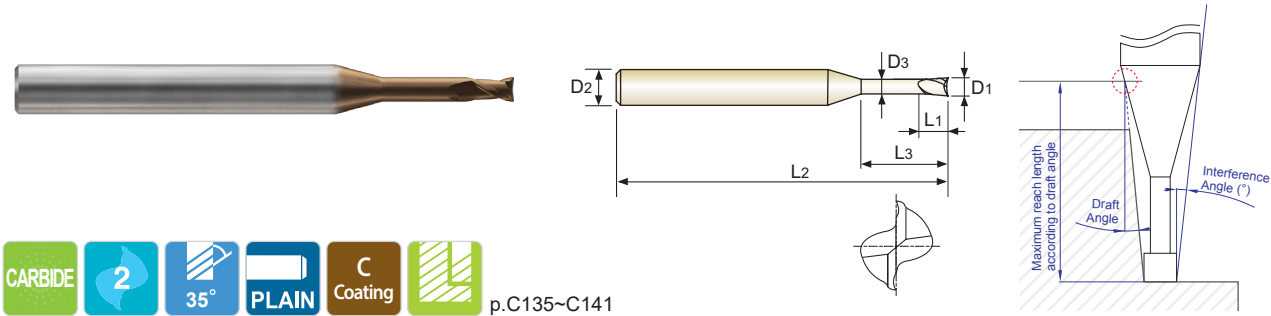

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
	D1	D2	L1	L3	L2	D3		0.5°	1°	1.5°	2°	3°
HPI88001	0.1	4	0.08	0.3	45	0.085	14.38	0.36	0.38	0.40	0.43	0.49
HPI88901	0.1	4	0.08	0.5	45	0.085	14.03	0.57	0.60	0.64	0.68	0.77
HPI88902	0.1	4	0.08	0.75	45	0.085	13.61	0.83	0.88	0.93	0.99	1.13
HPI88903	0.1	4	0.08	1	45	0.085	13.21	1.10	1.16	1.22	1.30	1.48
HPI880015	0.15	4	0.12	0.3	45	0.135	14.37	0.36	0.38	0.40	0.43	0.49
HPI88904	0.15	4	0.12	0.5	45	0.135	14.01	0.57	0.60	0.64	0.68	0.77
HPI88905	0.15	4	0.12	0.75	45	0.135	13.59	0.83	0.88	0.93	0.99	1.13
HPI88906	0.15	4	0.12	1	45	0.135	13.19	1.10	1.16	1.22	1.30	1.48
HPI88907	0.15	4	0.12	1.5	45	0.135	12.46	1.62	1.71	1.81	1.92	2.19
HPI88002	0.2	4	0.15	0.5	45	0.17	13.95	0.62	0.65	0.69	0.73	0.83
HPI88908	0.2	4	0.15	0.75	45	0.17	13.53	0.88	0.93	0.98	1.04	1.19
HPI88909	0.2	4	0.15	1	45	0.17	13.13	1.14	1.20	1.27	1.35	1.54
HPI88910	0.2	4	0.15	1.5	45	0.17	12.39	1.67	1.76	1.86	1.98	2.26
HPI88911	0.2	4	0.15	2	45	0.17	11.73	2.19	2.31	2.45	2.60	2.97
HPI88912	0.2	4	0.15	2.5	45	0.17	11.14	2.72	2.87	3.04	3.22	3.68
HPI88913	0.2	4	0.15	3	45	0.17	10.61	3.25	3.42	3.62	3.85	4.39
HPI88003	0.3	4	0.25	1	45	0.27	13.08	1.14	1.20	1.27	1.35	1.54
HPI88914	0.3	4	0.25	1.5	45	0.27	12.33	1.67	1.76	1.86	1.98	2.26
HPI88915	0.3	4	0.25	2	45	0.27	11.67	2.19	2.31	2.45	2.60	2.97
HPI88916	0.3	4	0.25	2.5	45	0.27	11.06	2.72	2.87	3.04	3.22	3.68
HPI88917	0.3	4	0.25	3	45	0.27	10.52	3.25	3.42	3.62	3.85	4.39
HPI88004	0.4	4	0.3	1	45	0.37	13.04	1.14	1.20	1.27	1.35	1.54
HPI88918	0.4	4	0.3	1.5	45	0.37	12.27	1.67	1.76	1.86	1.98	2.26
HPI88919	0.4	4	0.3	2	45	0.37	11.59	2.19	2.31	2.45	2.60	2.97
HPI88920	0.4	4	0.3	2.5	45	0.37	10.98	2.72	2.87	3.04	3.22	3.68
HPI88921	0.4	4	0.3	3	45	0.37	10.44	3.25	3.42	3.62	3.85	4.39

► NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~0.010	h4


◎ : Excellent ○ : Good

ISO	P												M			K								
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20			
HRc																								
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230			
Recommend					○			○	○		○	○												
ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-460	481-560	577-654	670-739		400	550
Recommend																		⊙	⊙	⊙	⊙	⊙	○	⊙

CARBIDE, 2 FLUTE for RIB PROCESSING
● VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
● Fraise carbure, 2 dents pour usinage de rainure
● 2 TAGLIENTI, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

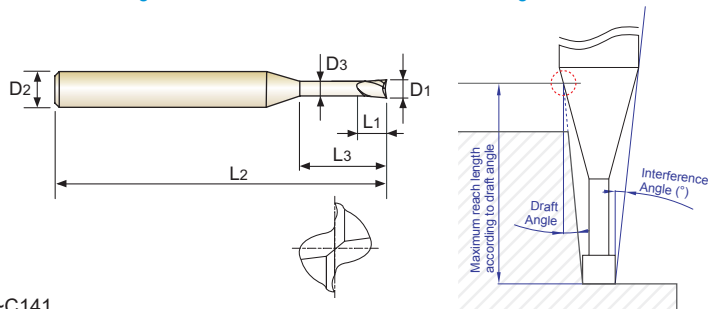

p.C135~C141

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
	D1	D2	L1	L3	L2	D3		0.5°	1°	1.5°	2°	3°
HPI88922	0.4	4	0.3	3.5	45	0.37	9.94	3.77	3.98	4.21	4.47	5.10
HPI88923	0.4	4	0.3	4	45	0.37	9.49	4.30	4.53	4.80	5.09	5.81
HPI88924	0.4	4	0.3	5	45	0.37	8.69	5.35	5.64	5.97	6.34	7.24
HPI88925	0.4	4	0.3	6	45	0.37	8.02	6.40	6.75	7.15	7.59	8.66
HPI88926	0.4	4	0.3	8	45	0.37	6.95	8.51	8.97	9.50	10.08	11.48
HPI88927	0.4	4	0.3	10	45	0.37	6.13	10.61	11.19	11.84	12.58	13.82
HPI88005	0.5	4	0.4	1	45	0.45	12.93	1.20	1.27	1.34	1.42	1.62
HPI88928	0.5	4	0.4	1.5	45	0.45	12.16	1.73	1.82	1.93	2.05	2.34
HPI88929	0.5	4	0.4	2	45	0.45	11.47	2.25	2.38	2.52	2.67	3.05
HPI88930	0.5	4	0.4	2.5	45	0.45	10.86	2.78	2.93	3.10	3.29	3.76
HPI88931	0.5	4	0.4	3	45	0.45	10.31	3.31	3.49	3.69	3.92	4.47
HPI88932	0.5	4	0.4	3.5	45	0.45	9.81	3.83	4.04	4.28	4.54	5.18
HPI88933	0.5	4	0.4	4	45	0.45	9.35	4.36	4.60	4.86	5.16	5.89
HPI88934	0.5	4	0.4	4.5	45	0.45	8.94	4.88	5.15	5.45	5.79	6.60
HPI88935	0.5	4	0.4	5	45	0.45	8.56	5.41	5.71	6.04	6.41	7.32
HPI88936	0.5	4	0.4	6	45	0.45	7.89	6.46	6.82	7.21	7.66	8.74
HPI88937	0.5	4	0.4	7	45	0.45	7.32	7.51	7.93	8.39	8.91	10.16
HPI88938	0.5	4	0.4	8	50	0.45	6.82	8.57	9.04	9.56	10.15	11.47
HPI88939	0.5	4	0.4	9	50	0.45	6.39	9.62	10.15	10.74	11.40	12.64
HPI88940	0.5	4	0.4	10	50	0.45	6.01	10.67	11.26	11.91	12.65	13.80
HPI88006	0.6	4	0.5	1.5	45	0.55	12.09	1.73	1.82	1.93	2.05	2.34
HPI88941	0.6	4	0.5	2	45	0.55	11.39	2.25	2.38	2.52	2.67	3.05
HPI88942	0.6	4	0.5	3	45	0.55	10.21	3.31	3.49	3.69	3.92	4.47
HPI88943	0.6	4	0.5	4	45	0.55	9.25	4.36	4.60	4.86	5.16	5.89
HPI88944	0.6	4	0.5	5	45	0.55	8.45	5.41	5.71	6.04	6.41	7.32
HPI88945	0.6	4	0.5	6	45	0.55	7.78	6.46	6.82	7.21	7.66	8.74

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4


◎ : Excellent ○ : Good

CARBIDE, 2 FLUTE for RIB PROCESSING

-  **VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN**
-  **Fraise carbure, 2 dents pour usinage de rainure**
-  **2 TAGLIENTI, SCARICATA PER NERVATURE**

- Improvement of tool life by applying new coating.
- Application of tight tolerances for precision machining.

- Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- Enge Toleranzen für die Präzisionsbearbeitung

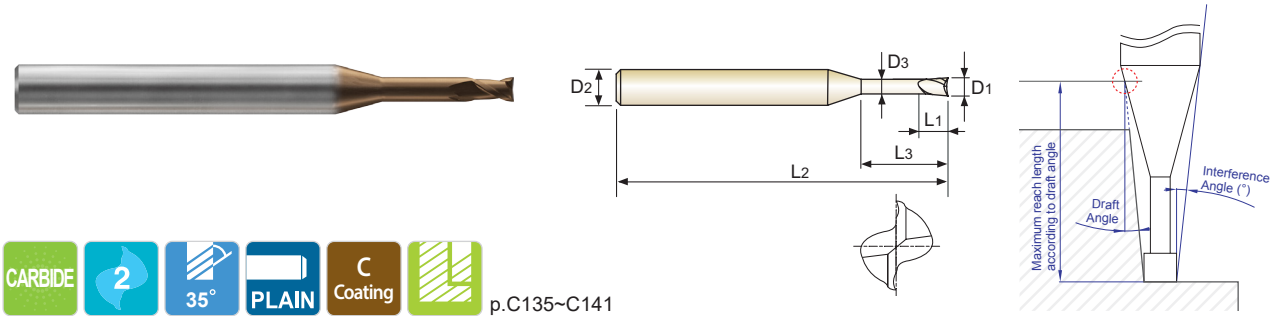

CARBIDE

2

35°

PLAIN

C Coating

p.C135~C141

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
	D1	D2	L1	L3	L2	D3		0.5°	1°	1.5°	2°	3°
HPI88007	0.7	4	0.55	2	45	0.65	11.31	2.25	2.38	2.52	2.67	3.05
HPI88946	0.7	4	0.55	4	45	0.65	9.14	4.36	4.60	4.86	5.16	5.89
HPI88947	0.7	4	0.55	6	45	0.65	7.67	6.46	6.82	7.21	7.66	8.74
HPI88948	0.7	4	0.55	8	50	0.65	6.60	8.57	9.04	9.56	10.15	11.35
HPI88949	0.7	4	0.55	10	50	0.65	5.80	10.67	11.26	11.91	12.65	13.69
HPI88008	0.8	4	0.65	3	45	0.75	10.01	3.31	3.49	3.69	3.92	4.47
HPI88950	0.8	4	0.65	4	45	0.75	9.03	4.36	4.60	4.86	5.16	5.89
HPI88951	0.8	4	0.65	5	45	0.75	8.23	5.41	5.71	6.04	6.41	7.32
HPI88952	0.8	4	0.65	6	45	0.75	7.55	6.46	6.82	7.21	7.66	8.74
HPI88953	0.8	4	0.65	8	50	0.75	6.49	8.57	9.04	9.56	10.15	11.29
HPI88954	0.8	4	0.65	10	50	0.75	5.69	10.67	11.26	11.91	12.65	13.63
HPI88955	0.8	4	0.65	12	50	0.75	5.06	12.77	13.48	14.26	15.12	15.97
HPI88010	1.0	4	0.8	2	50	0.95	11.04	2.25	2.38	2.52	2.67	3.05
HPI88956	1.0	4	0.8	3	50	0.95	9.79	3.31	3.49	3.69	3.92	4.47
HPI88957	1.0	4	0.8	4	50	0.95	8.80	4.36	4.60	4.86	5.16	5.89
HPI88958	1.0	4	0.8	5	50	0.95	7.99	5.41	5.71	6.04	6.41	7.32
HPI88959	1.0	4	0.8	6	50	0.95	7.31	6.46	6.82	7.21	7.66	8.74
HPI88960	1.0	4	0.8	7	50	0.95	6.74	7.51	7.93	8.39	8.91	10.01
HPI88961	1.0	4	0.8	8	50	0.95	6.25	8.57	9.04	9.56	10.15	11.18
HPI88962	1.0	4	0.8	9	50	0.95	5.83	9.62	10.15	10.74	11.40	12.35
HPI88963	1.0	4	0.8	10	50	0.95	5.46	10.67	11.26	11.91	12.65	13.52
HPI88964	1.0	4	0.8	12	50	0.95	4.85	12.77	13.48	14.26	15.01	15.85
HPI88965	1.0	4	0.8	14	50	0.95	4.36	14.88	15.70	16.61	17.22	18.19
HPI88966	1.0	4	0.8	16	60	0.95	3.96	16.98	17.92	18.93	19.43	20.53
HPI88967	1.0	4	0.8	18	60	0.95	3.62	19.09	20.13	21.09	21.65	22.86
HPI88968	1.0	4	0.8	20	60	0.95	3.34	21.19	22.35	23.24	23.86	25.20

► NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~0.010	h4



◎ : Excellent ○ : Good

ISO	P												M			K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20			
HRc																								
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230			
Recommend					○			○	○		○	○												
ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739	400	550	
Recommend																		◎	◎	◎	◎	◎	○	◎

CARBIDE, 2 FLUTE for RIB PROCESSING
● VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
● Fraise carbure, 2 dents pour usinage de rainure
● 2 TAGLIENTI, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

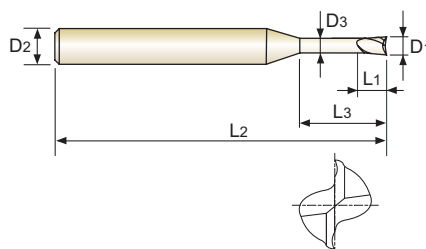

p.C135~C141

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
	D1	D2	L1	L3	L2	D3		0.5°	1°	1.5°	2°	3°
HPI88969	1.0	4	0.8	22	60	0.95	3.10	23.29	24.57	25.40	26.07	27.53
HPI88012	1.2	4	1	6	50	1.15	7.05	6.30	6.52	6.75	7.01	7.57
HPI88970	1.2	4	1	8	50	1.15	6.00	8.37	8.66	8.97	9.31	10.06
HPI88971	1.2	4	1	10	50	1.15	5.22	10.43	10.80	11.19	11.61	12.55
HPI88972	1.2	4	1	12	50	1.15	4.62	12.50	12.94	13.40	13.91	15.03
HPI88973	1.2	4	1	16	60	1.15	3.76	16.64	17.21	17.84	18.50	20.01
HPI88014	1.4	4	1.1	6	50	1.35	6.77	6.30	6.52	6.75	7.01	7.57
HPI88974	1.4	4	1.1	12	50	1.35	4.39	12.50	12.94	13.40	13.91	15.03
HPI88015	1.5	4	1.2	4	50	1.45	8.12	4.23	4.38	4.54	4.71	5.09
HPI88975	1.5	4	1.2	6	50	1.45	6.63	6.30	6.52	6.75	7.01	7.57
HPI88976	1.5	4	1.2	8	50	1.45	5.60	8.37	8.66	8.97	9.31	10.06
HPI88977	1.5	4	1.2	10	50	1.45	4.84	10.43	10.80	11.19	11.61	12.55
HPI88978	1.5	4	1.2	12	50	1.45	4.27	12.50	12.94	13.40	13.91	15.03
HPI88979	1.5	4	1.2	14	60	1.45	3.81	14.57	15.08	15.62	16.21	17.52
HPI88980	1.5	4	1.2	16	60	1.45	3.45	16.64	17.21	17.84	18.50	20.01
HPI88981	1.5	4	1.2	18	60	1.45	3.14	18.70	19.35	20.05	20.80	22.49
HPI88982	1.5	4	1.2	20	60	1.45	2.89	20.77	21.49	22.27	23.10	-
HPI88983	1.5	4	1.2	25	70	1.45	2.41	25.94	26.84	27.81	28.85	-
HPI88984	1.5	4	1.2	30	70	1.45	2.06	31.11	32.19	33.35	34.60	-
HPI88985	1.5	4	1.2	35	80	1.45	1.80	36.27	37.54	38.89	-	-
HPI88016	1.6	4	1.3	6	50	1.55	6.48	6.30	6.52	6.75	7.01	7.57
HPI88986	1.6	4	1.3	8	50	1.55	5.45	8.37	8.66	8.97	9.31	10.06
HPI88018	1.8	4	1.4	6	50	1.75	6.16	6.30	6.52	6.75	7.01	7.57
HPI88987	1.8	4	1.4	8	50	1.75	5.15	8.37	8.66	8.97	9.31	10.06
HPI88988	1.8	4	1.4	10	50	1.75	4.43	10.43	10.80	11.19	11.61	12.55
HPI88989	1.8	4	1.4	12	50	1.75	3.88	12.50	12.94	13.40	13.91	15.03

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K									
Material Description	Non-alloy steel						Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20					
HRC		13	25	28	32	10	29	32	38	15	35	44	15	23	10	26	3	25							
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230				
Recommend					○				○		○	○													
ISO	N										S							H							
Material Description	Aluminum-wrought alloy				Aluminum-cast, alloyed				Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel				Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30			31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	40	41
HRC													15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	71
HB	60	100	75	90	130	110	90	100					200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739	400	550
Recommend																				◎	◎	◎	◎	◎	◎


CARBIDE, 2 FLUTE for RIB PROCESSING

-  **VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN**
-  **Fraise carbure, 2 dents pour usinage de rainure**
-  **2 TAGLIENTI, SCARICATA PER NERVATURE**

- ▶ Improvement of tool life by applying new coating.

▶ Application of tight tolerances for precision machining.
- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung

▶ Enge Toleranzen für die Präzisionsbearbeitung

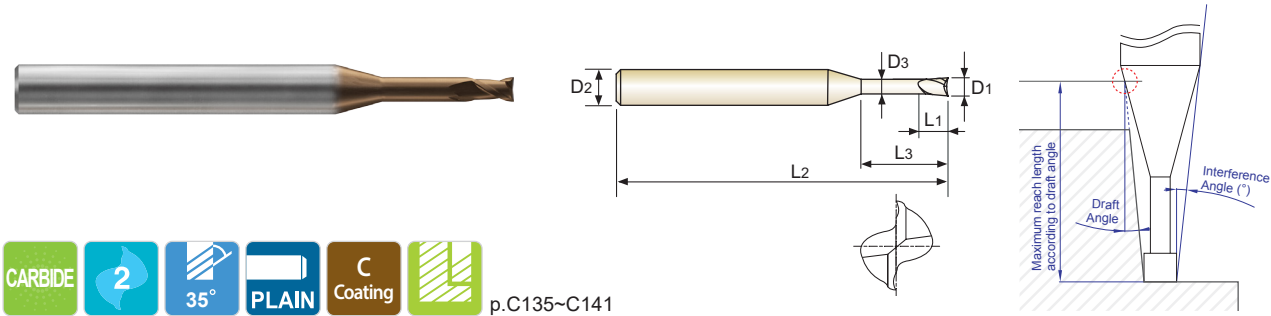

CARBIDE

2

35°

PLAIN

C Coating

p.C135~C141

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
	D1	D2	L1	L3	L2	D3		0.5°	1°	1.5°	2°	3°
HPI88990	1.8	4	1.4	14	50	1.75	3.46	14.57	15.08	15.62	16.21	17.52
HPI88991	1.8	4	1.4	16	60	1.75	3.12	16.64	17.21	17.84	18.50	20.01
HPI88992	1.8	4	1.4	18	60	1.75	2.84	18.70	19.35	20.05	20.80	-
HPI88020	2.0	4	1.6	4	50	1.95	7.28	4.23	4.38	4.54	4.71	5.09
HPI88993	2.0	4	1.6	6	50	1.95	5.81	6.30	6.52	6.75	7.01	7.57
HPI88994	2.0	4	1.6	8	50	1.95	4.83	8.37	8.66	8.97	9.31	10.06
HPI88995	2.0	4	1.6	10	50	1.95	4.14	10.43	10.80	11.19	11.61	12.55
HPI88996	2.0	4	1.6	12	50	1.95	3.62	12.50	12.94	13.40	13.91	15.03
HPI88997	2.0	4	1.6	14	60	1.95	3.21	14.57	15.08	15.62	16.21	17.52
HPI88998	2.0	4	1.6	16	60	1.95	2.89	16.64	17.21	17.84	18.50	-
HPI88999	2.0	4	1.6	18	60	1.95	2.62	18.70	19.35	20.05	20.80	-
HPI88801	2.0	4	1.6	20	60	1.95	2.40	20.77	21.49	22.27	23.10	-
HPI88802	2.0	4	1.6	25	70	1.95	1.99	25.94	26.84	27.81	-	-
HPI88803	2.0	4	1.6	30	70	1.95	1.69	31.11	32.19	33.35	-	-
HPI88804	2.0	4	1.6	35	80	1.95	1.48	36.27	37.54	-	-	-
HPI88805	2.0	4	1.6	40	90	1.95	1.31	41.44	42.89	-	-	-
HPI88806	2.0	4	1.6	50	100	1.95	1.06	51.78	53.58	-	-	-
HPI88025	2.5	4	2	8	50	2.4	3.91	8.46	8.76	9.07	9.41	10.18
HPI88807	2.5	4	2	12	50	2.4	2.87	12.60	13.04	13.51	14.01	-
HPI88808	2.5	4	2	16	60	2.4	2.26	16.73	17.31	17.94	18.61	-
HPI88809	2.5	4	2	20	60	2.4	1.87	20.87	21.59	22.37	-	-
HPI88810	2.5	4	2	30	70	2.4	1.30	31.20	32.29	-	-	-
HPI88811	2.5	4	2	40	90	2.4	1.00	41.54	-	-	-	-
HPI88812	2.5	4	2	50	100	2.4	0.81	51.88	-	-	-	-
HPI88030	3.0	6	4.5	8	50	2.85	6.17	8.56	8.86	9.18	9.52	10.29
HPI88813	3.0	6	4.5	12	50	2.85	4.80	12.69	13.14	13.61	14.12	15.27

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~0.010	h4



◎ : Excellent ○ : Good

ISO	P												M			K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11.1	11.2	12	13	14.1	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230			
Recommend					○			○	○		○	○												
ISO	N										S						H							
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRc											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739	◎	400	550
Recommend																		◎	◎	◎	◎	◎	○	◎

CARBIDE, 2 FLUTE for RIB PROCESSING
● VOLLHARTMETALL, 2 SCHNEIDEN für SCHMALE RIPPEN
● Fraise carbure, 2 dents pour usinage de rainure
● 2 TAGLIENTI, SCARICATA PER NERVATURE

- ▶ Improvement of tool life by applying new coating.
- ▶ Application of tight tolerances for precision machining.

- ▶ Verbesserung der Werkzeugstandzeit durch Aufbringen einer neuen Beschichtung
- ▶ Enge Toleranzen für die Präzisionsbearbeitung

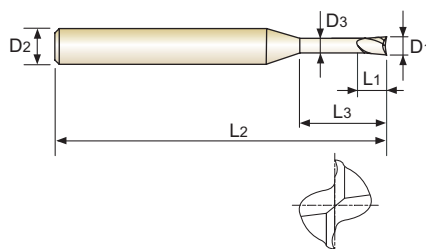

p.C135~C141

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Interference Angle(°)	Maximum reach lengths according to draft angle				
	D1	D2	L1	L3	L2	D3		0.5°	1°	1.5°	2°	3°
HPI88814	3.0	6	4.5	16	60	2.85	3.92	16.83	17.41	18.04	18.72	20.24
HPI88815	3.0	6	4.5	20	60	2.85	3.32	20.96	21.69	22.48	23.32	25.21
HPI88816	3.0	6	4.5	25	70	2.85	2.78	26.13	27.04	28.02	29.07	-
HPI88817	3.0	6	4.5	30	70	2.85	2.39	31.30	32.39	33.56	34.82	-
HPI88040	4.0	6	6	12	60	3.85	3.57	12.69	13.14	13.61	14.12	15.27
HPI88818	4.0	6	6	16	60	3.85	2.86	16.83	17.41	18.04	18.72	-
HPI88819	4.0	6	6	20	70	3.85	2.38	20.96	21.69	22.48	23.32	-
HPI88820	4.0	6	6	30	80	3.85	1.68	31.30	32.39	33.56	-	-
HPI88821	4.0	6	6	40	90	3.85	1.30	41.64	43.09	-	-	-
HPI88822	4.0	6	6	50	100	3.85	1.06	51.97	53.78	-	-	-
HPI88050	5.0	6	7.5	20	70	4.85	1.29	20.96	21.69	-	-	-
HPI88823	5.0	6	7.5	30	80	4.85	0.89	31.30	-	-	-	-
HPI88824	5.0	6	7.5	40	90	4.85	0.68	41.64	-	-	-	-
HPI88825	5.0	6	7.5	50	100	4.85	0.55	51.97	-	-	-	-
HPI88060	6.0	6	9	20	70	5.85	0.00	-	-	-	-	-
HPI88826	6.0	6	9	30	80	5.85	0.00	-	-	-	-	-
HPI88827	6.0	6	9	40	90	5.85	0.00	-	-	-	-	-
HPI88828	6.0	6	9	50	100	5.85	0.00	-	-	-	-	-

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0~-0.010	h4

◎ : Excellent ○ : Good

ISO	P												M			K								
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	11.2	12	13	14.1	15	16	17	18	19	20			
HRC	13	23	25	28	32	10	29	32	38	15	35	44	15	23	10	10	26	3	25	21	21			
HB	125	190	250	270	300	180	275	300	350	200	325	409	200	240	180	180	260	160	250	130	230			
Recommend					○			○	○		○	○												
ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel					Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38.1	38.2	39.1	39.2	39.3	40	41
HRC											15	30	25	38	34			45-49	50-55	56-60	61-65	66-70	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	421-469	481-560	577-654	670-739		400	550
Recommend																		◎	◎	◎	◎	◎	◎	◎

SELECTION GUIDE



SERIES	HPI90	HPI91	HPI92	HPI89	HPI88
FLUTE	2	2	2	2	2
HELIX ANGLE	30°	30°	30°	35°	35°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS	SQUARE
SIZE MIN	R0.05	R0.05	R0.05	D0.2	D0.1
SIZE MAX	R10.0	R3.0	R6.0	D3.0	D6.0
PAGE	C87	C88	C98	C107	C114

Scan QR Code to See Catalogue
DIE & MOLD



SOLID CARBIDE
X1-EH
END MILLS

Highly Accurate Fine-Finishing
for High Hardened Steel



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p. C120

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc					
P	1	Non-alloy steel	About 0.15% C	Annealed	125						
	2		About 0.45% C	Annealed	190	13					
	3		About 0.45% C	Quenched & tempered	250	25					
	4		About 0.75% C	Annealed	270	28					
	5		About 0.75% C	Quenched & tempered	300	32	○	○	○	○	○
	6	Low alloy steel		Annealed	180	10					
	7			Quenched & tempered	275	29					
	8			Quenched & tempered	300	32	○	○	○	○	○
	9			Quenched & tempered	350	38	○	○	○	○	○
	10			Annealed	200	15					
	11.1	High alloyed steel, and tool steel		Quenched & Tempered	325	35	○	○	○	○	○
	11.2			Quenched & Tempered	409	44	○	○	○	○	○
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15					
	13		Martensitic	Quenched & Tempered	240	23					
	14.1			Austenitic	180	10					
K	15	Grey cast iron	Pearlitic / ferritic		180	10					
	16		Pearlitic (Martensitic)		260	26					
	17	Nodular cast iron	Ferritic		160	3					
	18		Pearlitic		250	25					
	19	Malleable cast iron	Ferritic		130						
	20		Pearlitic		230	21					
N	21	Aluminum-wrought alloy	Not Curable		60						
	22		Curable Hardened		100						
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75						
	24		≤ 12% Si, Curable Hardened		90						
	25		> 12% Si, Not Curable		130						
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110						
	27		CuZn, CuSnZn (Brass)		90						
	28		CuSn, lead-free copper and electrolytic copper		100						
	29		Duroplastic, Fiber Reinforced Plastic								
	30	Non Metallic Materials	Rubber, Wood, etc.								
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15					
	32			Cured	280	30					
	33		Ni or Co Based	Annealed	250	25					
	34			Cured	350	38					
	35			Cast	320	34					
	36	Titanium Alloys	Pure Titanium		400 Rm						
	37		Alpha + Beta Alloys Hardened		1050 Rm						
H	38	Hardened steel		Hardened	421-469	45-49	◎	◎	◎	◎	◎
	39			Hardened		66-70	◎	◎	◎	◎	◎
	40	Chilled Cast Iron		Cast	400	42	○	○	○	○	○
	41	Hardened Cast Iron		Hardened	550	55	◎	◎	◎	◎	◎



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING

ISO	VDI 3323	Parameter	Diameter (Ø)																				
			0.4	0.4	0.4	0.4	0.4	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.6	0.6	
			LBS	4	5	6	8	10	1	1.5	2	2.5	3	3.5	4	4.5	5	6	7	8	9	10	1.5
P	5	Vc	60	54	54	40	20	82	82	82	82	74	74	74	74	74	66	66	49	49	49	98	98
		fz	0.002	0.002	0.002	0.001	0.001	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.005	0.005
		RPM	47949	42622	42622	31966	15983	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	31475	51911	51911
		FEED	192	170	170	64	32	420	420	420	420	378	378	378	378	378	252	252	189	189	189	519	519
		Ap	0.014	0.014	0.012	0.010	0.008	0.025	0.025	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.018	0.015	0.015	0.013	0.030	0.027	
	8~9	Vc	60	54	54	40	20	82	82	82	82	74	74	74	74	74	66	66	49	49	49	98	98
		fz	0.002	0.002	0.002	0.001	0.001	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.005	0.005
		RPM	47949	42622	42622	31966	15983	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	31475	51911	51911
		FEED	192	170	170	64	32	420	420	420	420	378	378	378	378	378	252	252	189	189	189	519	519
		Ap	0.014	0.014	0.012	0.010	0.008	0.025	0.025	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.018	0.015	0.015	0.013	0.030	0.027	
	11.1	Vc	60	54	54	40	20	82	82	82	82	74	74	74	74	74	66	66	49	49	49	98	98
		fz	0.002	0.002	0.002	0.001	0.001	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.005	0.005
		RPM	47949	42622	42622	31966	15983	52458	52458	52458	52458	47212	47212	47212	47212	47212	41966	41966	31475	31475	31475	51911	51911
		FEED	192	170	170	64	32	420	420	420	420	378	378	378	378	378	252	252	189	189	189	519	519
		Ap	0.014	0.014	0.012	0.010	0.008	0.025	0.025	0.023	0.023	0.020	0.020	0.020	0.018	0.018	0.018	0.015	0.015	0.013	0.030	0.027	
	11.2	Vc	51	45	45	34	17	72	72	72	72	65	65	65	65	65	58	58	43	43	43	88	88
		fz	0.002	0.002	0.002	0.001	0.001	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.004	0.004
		RPM	40573	36065	36065	27049	13524	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	27540	27540	27540	46447	46447
		FEED	162	144	144	54	27	275	275	275	275	248	248	248	248	248	147	147	110	110	110	372	372
		Ap	0.012	0.012	0.010	0.009	0.007	0.021	0.021	0.019	0.019	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.013	0.011	0.026	0.023
H	38.1	Vc	51	45	45	34	17	72	72	72	72	65	65	65	65	65	58	58	43	43	43	88	88
		fz	0.002	0.002	0.002	0.001	0.001	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.004	0.004
		RPM	40573	36065	36065	27049	13524	45900	45900	45900	45900	41310	41310	41310	41310	41310	36720	36720	27540	27540	27540	46447	46447
		FEED	162	144	144	54	27	275	275	275	275	248	248	248	248	248	147	147	110	110	110	372	372
		Ap	0.012	0.012	0.010	0.009	0.007	0.021	0.021	0.019	0.019	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.013	0.011	0.026	0.023
	38.2	Vc	46	41	41	31	15	67	67	67	67	60	60	60	60	60	54	54	40	40	40	77	77
		fz	0.002	0.002	0.002	0.001	0.001	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.002	0.002	0.002	0.002	0.002	0.004	0.004
		RPM	36885	32786	32786	24590	12295	42621	42621	42621	42621	38359	38359	38359	38359	38359	34097	34097	25573	25573	25573	40983	40983
		FEED	148	131	131	49	25	256	256	256	256	230	230	230	230	230	136	136	102	102	102	328	328
		Ap	0.012	0.012	0.010	0.009	0.007	0.021	0.021	0.019	0.019	0.017	0.017	0.017	0.017	0.015	0.015	0.015	0.013	0.013	0.011	0.026	0.023
	39.1	Vc	37	33	33	25	12	52	52	52	52	46	46	46	46	46	41	41	31	31	31	57	57
		fz	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.001	0.001	0.001	0.003	0.003
		RPM	29507	26229	26229	19672	9836	32786	32786	32786	32786	29507	29507	29507	29507	29507	26229	26229	19672	19672	19672	30053	30053
		FEED	59	52	52	39	20	131	131	131	131	118	118	118	118	118	105	105	39	39	39	180	180
		Ap	0.011	0.011	0.010	0.008	0.006	0.020	0.020	0.018	0.018	0.016	0.016	0.016	0.016	0.014	0.014	0.014	0.012	0.012	0.010	0.024	0.022
	39.2	Vc	28	25	25	19	9	41	41	41	41	37	37	37	37	37	33	33	25	25	25	46	46
		fz	0.001	0.001	0.001	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.001	0.001	0.001	0.001	0.001	0.002	0.002
		RPM	22130	19671	19671	14753	7377	26229	26229	26229	26229	23606	23606	23606	23606	23606	20983	20983	15737	15737			

HPI88 SERIES
2 FLUTE SQUARE for RIB PROCESSING

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

ISO	VDI 3323	Parameter LBS	Diameter (Ø)																			
			0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	1	1	1	1	
			3	4	5	6	2	4	6	8	10	3	4	5	6	8	10	12	2	3	4	5
P	5	Vc	98	88	88	88	113	102	102	91	91	129	129	116	116	116	103	103	154	154	154	154
		fz	0.005	0.005	0.005	0.005	0.006	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.010	0.010	0.010	0.010
		RPM	51911	46720	46720	46720	51569	46412	46412	41255	41255	51228	51228	46105	46105	46105	40982	40982	49178	49178	49178	49178
		FEED	519	467	467	467	619	464	464	330	330	615	615	461	461	461	410	410	984	984	984	984
		Ap	0.027	0.024	0.021	0.021	0.035	0.028	0.025	0.025	0.021	0.036	0.036	0.032	0.032	0.028	0.028	0.024	0.050	0.050	0.045	0.045
	8~9	Vc	98	88	88	88	113	102	102	91	91	129	129	116	116	116	103	103	154	154	154	154
		fz	0.005	0.005	0.005	0.005	0.006	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.010	0.010	0.010	0.010
		RPM	51911	46720	46720	46720	51569	46412	46412	41255	41255	51228	51228	46105	46105	46105	40982	40982	49178	49178	49178	49178
		FEED	519	467	467	467	619	464	464	330	330	615	615	461	461	461	410	410	984	984	984	984
		Ap	0.027	0.024	0.021	0.021	0.035	0.028	0.025	0.025	0.021	0.036	0.036	0.032	0.032	0.028	0.028	0.024	0.050	0.050	0.045	0.045
	11.1	Vc	98	88	88	88	113	102	102	91	91	129	129	116	116	116	103	103	154	154	154	154
		fz	0.005	0.005	0.005	0.005	0.006	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.010	0.010	0.010	0.010
		RPM	51911	46720	46720	46720	51569	46412	46412	41255	41255	51228	51228	46105	46105	46105	40982	40982	49178	49178	49178	49178
		FEED	519	467	467	467	619	464	464	330	330	615	615	461	461	461	410	410	984	984	984	984
		Ap	0.027	0.024	0.021	0.021	0.035	0.028	0.025	0.025	0.021	0.036	0.036	0.032	0.032	0.028	0.028	0.024	0.050	0.050	0.045	0.045
	11.2	Vc	88	79	79	79	93	84	84	74	74	103	103	93	93	93	82	82	124	124	124	124
		fz	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.008	0.008	0.008	0.008
		RPM	46447	41802	41802	41802	42230	38007	38007	33784	33784	40983	40983	36885	36885	36885	32786	32786	39343	39343	39343	39343
		FEED	372	334	334	334	422	380	380	270	270	492	492	369	369	369	328	328	629	629	629	629
		Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038
H	38.1	Vc	88	79	79	79	93	84	84	74	74	103	103	93	93	93	82	82	124	124	124	124
		fz	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.004	0.004	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.008	0.008	0.008	0.008
		RPM	46447	41802	41802	41802	42230	38007	38007	33784	33784	40983	40983	36885	36885	36885	32786	32786	39343	39343	39343	39343
		FEED	372	334	334	334	422	380	380	270	270	492	492	369	369	369	328	328	629	629	629	629
		Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038
	38.2	Vc	77	70	70	70	77	69	69	62	62	77	77	70	70	70	62	62	82	82	82	82
		fz	0.004	0.004	0.004	0.004	0.005	0.004	0.004	0.004	0.004	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.007	0.007	0.007	0.007
		RPM	40983	36885	36885	36885	35020	31518	31518	28016	28016	30737	30737	27663	27663	27663	24590	24590	26229	26229	26229	26229
		FEED	328	295	295	295	350	252	252	224	224	307	307	277	277	277	197	197	367	367	367	367
		Ap	0.023	0.020	0.018	0.018	0.030	0.024	0.021	0.021	0.018	0.031	0.031	0.027	0.027	0.024	0.024	0.020	0.043	0.043	0.038	0.038
	39.1	Vc	57	51	51	51	62	56	56	50	50	67	67	60	60	60	54	54	67	67	67	67
		fz	0.003	0.003	0.003	0.003	0.004	0.003	0.003	0.003	0.003	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.005	0.005	0.005	0.005
		RPM	30053	27048	27048	27048	28335	25502	25502	22668	22668	26639	26639	23975	23975	23975	21311	21311	21311	21311		



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING

ISO	VDI 3323	Parameter	Diameter (Ø)																				
			1	1	1	1	1	1	1	1	1	1	1	1.2	1.2	1.2	1.2	1.2	1.4	1.4	1.5	1.5	
			LBS	6	7	8	9	10	12	14	16	18	20	22	6	8	10	12	16	6	12	4	6
P	5	Vc	139	139	139	139	139	124	124	93	93	93	46	170	153	153	153	136	185	167	196	196	176
		fz	0.009	0.009	0.009	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.011	0.009	0.009	0.009	0.008	0.011	0.010	0.011	0.011	0.010
		RPM	44260	44260	44260	44260	44260	39342	39342	29507	29507	29507	14753	45081	40573	40573	40573	36065	42154	37939	41581	41581	37423
		FEED	797	797	797	797	797	629	629	413	413	413	177	992	730	730	730	577	927	759	915	915	748
		Ap	0.040	0.040	0.040	0.035	0.035	0.030	0.030	0.025	0.025	0.020	0.054	0.048	0.042	0.042	0.036	0.063	0.049	0.075	0.068	0.060	
	8~9	Vc	139	139	139	139	139	124	124	93	93	93	46	170	153	153	153	136	185	167	196	196	176
		fz	0.009	0.009	0.009	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.011	0.009	0.009	0.009	0.008	0.011	0.010	0.011	0.011	0.010
		RPM	44260	44260	44260	44260	44260	39342	39342	29507	29507	29507	14753	45081	40573	40573	40573	36065	42154	37939	41581	41581	37423
		FEED	797	797	797	797	797	629	629	413	413	413	177	992	730	730	730	577	927	759	915	915	748
		Ap	0.040	0.040	0.040	0.035	0.035	0.030	0.030	0.025	0.025	0.020	0.054	0.048	0.042	0.042	0.036	0.063	0.049	0.075	0.068	0.060	
	11.1	Vc	139	139	139	139	139	124	124	93	93	93	46	170	153	153	153	136	185	167	196	196	176
		fz	0.009	0.009	0.009	0.009	0.009	0.008	0.008	0.007	0.007	0.007	0.006	0.011	0.009	0.009	0.009	0.008	0.011	0.010	0.011	0.011	0.010
		RPM	44260	44260	44260	44260	44260	39342	39342	29507	29507	29507	14753	45081	40573	40573	40573	36065	42154	37939	41581	41581	37423
		FEED	797	797	797	797	797	629	629	413	413	413	177	992	730	730	730	577	927	759	915	915	748
		Ap	0.040	0.040	0.040	0.035	0.035	0.030	0.030	0.025	0.025	0.020	0.054	0.048	0.042	0.042	0.036	0.063	0.049	0.075	0.068	0.060	
	11.2	Vc	111	111	111	111	111	99	99	74	74	74	37	139	125	125	125	111	144	130	154	154	139
		fz	0.007	0.007	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.005	0.009	0.008	0.008	0.008	0.007	0.010	0.009	0.010	0.010	0.009
		RPM	35409	35409	35409	35409	35409	31474	31474	23606	23606	23606	11803	36884	33196	33196	33196	29507	32786	29507	32754	32754	29479
		FEED	496	496	496	496	496	378	378	283	283	283	118	664	538	538	538	425	662	536	655	655	531
		Ap	0.034	0.034	0.034	0.030	0.030	0.026	0.026	0.021	0.021	0.021	0.017	0.046	0.041	0.036	0.036	0.031	0.054	0.042	0.064	0.057	0.051
H	38.1	Vc	111	111	111	111	111	99	99	74	74	74	37	139	125	125	125	111	144	130	154	154	139
		fz	0.007	0.007	0.007	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.005	0.009	0.008	0.008	0.008	0.007	0.010	0.009	0.010	0.010	0.009
		RPM	35409	35409	35409	35409	35409	31474	31474	23606	23606	23606	11803	36884	33196	33196	33196	29507	32786	29507	32754	32754	29479
		FEED	496	496	496	496	496	378	378	283	283	283	118	664	538	538	538	425	662	536	655	655	531
		Ap	0.034	0.034	0.034	0.030	0.030	0.026	0.026	0.021	0.021	0.021	0.017	0.046	0.041	0.036	0.036	0.031	0.054	0.042	0.064	0.057	0.051
	38.2	Vc	74	74	74	74	74	66	66	49	49	49	25	93	83	83	83	74	98	88	103	103	93
		fz	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.005	0.004	0.008	0.007	0.007	0.007	0.006	0.009	0.008	0.009	0.009	0.008
		RPM	23606	23606	23606	23606	23606	20983	20983	15737	15737	15737	7869	24589	22130	22130	22130	19671	22248	20023	21939	21939	19745
		FEED	283	283	283	283	283	252	252	157	157	157	63	393	310	310	310	236	400	320	395	395	316
		Ap	0.034	0.034	0.034	0.030	0.030	0.026	0.026	0.021	0.021	0.021	0.017	0.046	0.041	0.036	0.036	0.031	0.054	0.042	0.064	0.057	0.051
	39.1	Vc	60	60	60	60	60	54	54	40	40	40	20	75	68	68	68	60	77	70	83	83	74
		fz	0.005	0.005	0.005	0.005	0.005	0.004	0.004	0.004	0.004	0.004	0.003	0.006	0.005	0.005	0.005	0.005	0.007	0.006	0.007	0.007	0.006
		RPM	19180	19180	19180	19180	19180	17049	17049	12787	12787	12787	6393	19945	17951	17951	17951	15956	17564	15808	17510	17510	15759
		FEED	192	192	192	192	192	136	136	102	102	102	38	239	180	180	180	160	246	190	245	245	189
		Ap	0.032	0.032	0.032	0.028	0.028	0.024	0.024	0.020	0.020	0.020	0.016	0.043	0.038	0.034	0.034	0.029	0.050	0.039	0.060	0.054	0.048
	39.2	Vc	46	46	46	46	46	41	41	31	31	31	15	57	51	51	51	45	60	54	62	62	56
		fz	0.004	0.004	0.004	0.004	0.004	0.003	0.003	0.003	0.003	0.003	0.002	0.005	0.004	0.004	0.004	0.003	0.005	0.004	0.005	0.006	0.005
		RPM	14753	14753	14753	14753	14753	13114	13114	9835													

HPI88 SERIES
2 FLUTE SQUARE for RIB PROCESSING

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

ISO	VDI 3323	Parameter	Diameter (Ø)																				
			1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.6	1.6	1.8	1.8	1.8	1.8	1.8	1.8	2			
			LBS	10	12	14	16	18	20	25	30	35	6	8	6	8	10	12	14	16	18	4	6
P	5	Vc	176	176	176	157	157	157	118	118	59	201	201	226	226	203	203	203	203	203	203	216	216
		fz	0.010	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.007	0.012	0.012	0.012	0.012	0.010	0.010	0.010	0.010	0.010	0.010	0.013	0.013
		RPM	37423	37423	37423	33265	33265	33265	24949	24949	12474	39958	39958	39958	39958	35962	35962	35962	35962	35962	35962	34426	34426
		FEED	748	748	748	599	599	599	399	399	175	959	959	959	959	719	719	719	719	719	719	895	895
		Ap	0.060	0.060	0.053	0.053	0.053	0.045	0.038	0.038	0.030	0.072	0.072	0.081	0.081	0.072	0.072	0.072	0.063	0.063	0.100	0.100	
	8~9	Vc	176	176	176	157	157	157	118	118	59	201	201	226	226	203	203	203	203	203	203	216	216
		fz	0.010	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.007	0.012	0.012	0.012	0.012	0.010	0.010	0.010	0.010	0.010	0.010	0.013	0.013
		RPM	37423	37423	37423	33265	33265	33265	24949	24949	12474	39958	39958	39958	39958	35962	35962	35962	35962	35962	35962	34426	34426
		FEED	748	748	748	599	599	599	399	399	175	959	959	959	959	719	719	719	719	719	719	895	895
		Ap	0.060	0.060	0.053	0.053	0.053	0.045	0.038	0.038	0.030	0.072	0.072	0.081	0.081	0.072	0.072	0.072	0.063	0.063	0.100	0.100	
	11.1	Vc	176	176	176	157	157	157	118	118	59	201	201	226	226	203	203	203	203	203	203	216	216
		fz	0.010	0.010	0.010	0.009	0.009	0.009	0.008	0.008	0.007	0.012	0.012	0.012	0.012	0.010	0.010	0.010	0.010	0.010	0.010	0.013	0.013
		RPM	37423	37423	37423	33265	33265	33265	24949	24949	12474	39958	39958	39958	39958	35962	35962	35962	35962	35962	35962	34426	34426
		FEED	748	748	748	599	599	599	399	399	175	959	959	959	959	719	719	719	719	719	719	895	895
		Ap	0.060	0.060	0.053	0.053	0.053	0.045	0.038	0.038	0.030	0.072	0.072	0.081	0.081	0.072	0.072	0.072	0.063	0.063	0.100	0.100	
	11.2	Vc	139	139	139	123	123	123	93	93	46	161	161	181	181	163	163	163	163	163	163	170	170
		fz	0.009	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.006	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.009	0.009	0.013	0.013
		RPM	29479	29479	29479	26203	26203	26203	19652	19652	9826	31966	31966	31966	31966	28769	28769	28769	28769	28769	28769	27049	27049
		FEED	531	531	531	419	419	419	275	275	118	639	639	639	639	518	518	518	518	518	518	703	703
		Ap	0.051	0.051	0.045	0.045	0.045	0.038	0.032	0.032	0.026	0.061	0.061	0.069	0.069	0.061	0.061	0.061	0.054	0.054	0.085	0.085	
H	38.1	Vc	139	139	139	123	123	123	93	93	46	161	161	181	181	163	163	163	163	163	163	170	170
		fz	0.009	0.009	0.009	0.008	0.008	0.008	0.007	0.007	0.006	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.009	0.009	0.013	0.013
		RPM	29479	29479	29479	26203	26203	26203	19652	19652	9826	31966	31966	31966	31966	28769	28769	28769	28769	28769	28769	27049	27049
		FEED	531	531	531	419	419	419	275	275	118	639	639	639	639	518	518	518	518	518	518	703	703
		Ap	0.051	0.051	0.045	0.045	0.045	0.038	0.032	0.032	0.026	0.061	0.061	0.069	0.069	0.061	0.061	0.061	0.054	0.054	0.085	0.085	
	38.2	Vc	93	93	93	83	83	83	62	62	31	106	106	119	119	107	107	107	107	107	107	113	113
		fz	0.008	0.008	0.008	0.007	0.007	0.007	0.006	0.006	0.005	0.010	0.010	0.010	0.010	0.009	0.009	0.009	0.009	0.009	0.009	0.012	0.012
		RPM	19745	19745	19745	17551	17551	17551	13163	13163	6582	21106	21106	21106	21106	18995	18995	18995	18995	18995	18995	18032	18032
		FEED	316	316	316	246	246	246	158	158	66	422	422	422	422	342	342	342	342	342	342	433	433
		Ap	0.051	0.051	0.045	0.045	0.045	0.038	0.032	0.032	0.026	0.061	0.061	0.069	0.069	0.061	0.061	0.061	0.054	0.054	0.085	0.085	
	39.1	Vc	74	74	74	66	66	66	50	50	25	85	85	96	96	87	87	87	87	87	87	93	93
		fz	0.006	0.006	0.006	0.005	0.005	0.005	0.005	0.005	0.004	0.007	0.007	0.007	0.007	0.006							



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

HPI88 SERIES 2 FLUTE SQUARE for RIB PROCESSING

ISO	VDI 3323	Parameter	Diameter (Ø)																				
			2	2	2	2	2	2	2	2	2	2	2	2	2.5	2.5	2.5	2.5	2.5	2.5	3	3	
			LBS	8	10	12	14	16	18	20	25	30	35	40	50	8	12	16	20	30	40	50	8
P	5	Vc	216	216	195	195	195	195	195	173	173	130	130	65	217	217	195	195	173	130	130	211	211
		fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.016	0.016	0.014	0.014	0.013	0.011	0.011	0.019	0.019
		RPM	34426	34426	30983	30983	30983	30983	30983	27541	27541	20656	20656	10328	27604	27604	24844	24844	22083	16562	16562	22404	22404
		FEED	895	895	744	744	744	744	744	551	551	372	372	165	883	883	696	696	574	364	364	851	851
		Ap	0.090	0.090	0.080	0.080	0.080	0.070	0.070	0.070	0.060	0.050	0.050	0.040	0.113	0.113	0.100	0.100	0.088	0.075	0.063	0.150	0.135
	8~9	Vc	216	216	195	195	195	195	195	173	173	130	130	65	217	217	195	195	173	130	130	211	211
		fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.016	0.016	0.014	0.014	0.013	0.011	0.011	0.019	0.019
		RPM	34426	34426	30983	30983	30983	30983	30983	27541	27541	20656	20656	10328	27604	27604	24844	24844	22083	16562	16562	22404	22404
		FEED	895	895	744	744	744	744	744	551	551	372	372	165	883	883	696	696	574	364	364	851	851
		Ap	0.090	0.090	0.080	0.080	0.080	0.070	0.070	0.070	0.060	0.050	0.050	0.040	0.113	0.113	0.100	0.100	0.088	0.075	0.063	0.150	0.135
	11.1	Vc	216	216	195	195	195	195	195	173	173	130	130	65	217	217	195	195	173	130	130	211	211
		fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.016	0.016	0.014	0.014	0.013	0.011	0.011	0.019	0.019
		RPM	34426	34426	30983	30983	30983	30983	30983	27541	27541	20656	20656	10328	27604	27604	24844	24844	22083	16562	16562	22404	22404
		FEED	895	895	744	744	744	744	744	551	551	372	372	165	883	883	696	696	574	364	364	851	851
		Ap	0.090	0.090	0.080	0.080	0.080	0.070	0.070	0.070	0.060	0.050	0.050	0.040	0.113	0.113	0.100	0.100	0.088	0.075	0.063	0.150	0.135
	11.2	Vc	170	170	153	153	153	153	153	136	136	102	102	51	170	170	153	153	136	102	102	170	170
		fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.017	0.017	0.015	0.015	0.013	0.012	0.012	0.020	0.020
		RPM	27049	27049	24344	24344	24344	24344	24344	21639	21639	16229	16229	8115	21630	21630	19467	19467	17304	12978	12978	18032	18032
		FEED	703	703	584	584	584	584	584	433	433	292	292	130	735	735	584	584	450	311	311	721	721
		Ap	0.077	0.077	0.068	0.068	0.068	0.060	0.060	0.060	0.051	0.043	0.043	0.034	0.096	0.096	0.085	0.085	0.074	0.064	0.053	0.128	0.115
H	38.1	Vc	170	170	153	153	153	153	153	136	136	102	102	51	170	170	153	153	136	102	102	170	170
		fz	0.013	0.013	0.012	0.012	0.012	0.012	0.012	0.010	0.010	0.009	0.009	0.008	0.017	0.017	0.015	0.015	0.013	0.012	0.012	0.020	0.020
		RPM	27049	27049	24344	24344	24344	24344	24344	21639	21639	16229	16229	8115	21630	21630	19467	19467	17304	12978	12978	18032	18032
		FEED	703	703	584	584	584	584	584	433	433	292	292	130	735	735	584	584	450	311	311	721	721
		Ap	0.077	0.077	0.068	0.068	0.068	0.060	0.060	0.060	0.051	0.043	0.043	0.034	0.096	0.096	0.085	0.085	0.074	0.064	0.053	0.128	0.115
	38.2	Vc	113	113	102	102	102	102	102	91	91	68	68	34	113	113	102	102	91	68	68	113	113
		fz	0.012	0.012	0.011	0.011	0.011	0.011	0.011	0.010	0.010	0.008	0.008	0.007	0.015	0.015	0.014	0.014	0.012	0.011	0.011	0.018	0.018
		RPM	18032	18032	16229	16229	16229	16229	16229	14426	14426	10819	10819	5410	14420	14420	12978	12978	11536	8652	8652	12021	12021
		FEED	433	433	357	357	357	357	357	289	289	173	173	76	433	433	363	363	277	190	190	433	433
		Ap	0.077	0.077	0.068	0.068	0.068	0.060	0.060	0.051	0.043	0.043	0.034	0.034	0.096	0.096	0.085	0.085	0.074	0.064	0.053	0.128	0.115
	39.1	Vc	93	93	83	83	83	83	83	74	74	56	56	28	93	93	84	84	74	56	56	93	93
		fz	0.009	0.009	0.008	0.008	0.008	0.008	0.008	0.007	0.007	0.006	0.006	0.005	0.011	0.011	0.010	0.010	0.009	0.008	0.008	0.014	0.014
		RPM	14754	14754	13279	13279	13279	13279	13279	11803	11803	8852	8852	4426	11845	11845	10661	10661	9476	7107	7107	9835	9835
		FEED	266	266	212	212	212	212	212	165	165	106	106	44	261	261	213	213	171	114	114	275	275
		Ap	0.072	0.072	0.064	0.064	0.064	0.056	0.056	0.056	0.048	0.040	0.040	0.032	0.090	0.090	0.080	0.080	0.070	0.060	0.050	0.120	0.108
	39.2	Vc	72	72	65	65	65	65	65	58	58	43	43	22	72	72	65	65	58	43	43	72	72
		fz	0.007	0.007	0.006	0.006	0.006	0.006	0.006	0.006	0.006	0.005	0.005	0.004	0.009	0.009	0.008	0.008	0.007	0.006	0.006	0.011	0.011
		RPM	11475	11475	10328	10328	10328	103															

HPI88 SERIES
2 FLUTE SQUARE for RIB PROCESSING

Vc = m/min.
fz = mm/tooth
RPM = rev/min.
FEED = mm/min.
Ap = mm
LBS = Length Below Shank

ISO	VDI 3323	Parameter	Diameter (Ø)																
			3	3	3	3	4	4	4	4	4	4	5	5	5	5	6	6	
			LBS	16	20	25	30	12	16	20	30	40	50	20	30	40	50	20	30
P	5	Vc	190	190	190	190	216	216	216	195	195	173	252	227	227	227	252	252	227
		fz	0.017	0.017	0.017	0.017	0.026	0.026	0.026	0.023	0.023	0.021	0.032	0.029	0.029	0.029	0.036	0.036	0.032
		RPM	20164	20164	20164	20164	17212	17212	17212	15491	15491	13770	16065	14459	14459	14459	13388	13388	12049
		FEED	686	686	686	686	895	895	895	713	713	578	1028	839	839	839	964	964	771
		Ap	0.120	0.120	0.105	0.105	0.200	0.180	0.180	0.160	0.140	0.140	0.225	0.200	0.200	0.175	0.270	0.270	0.240
	8~9	Vc	190	190	190	190	216	216	216	195	195	173	252	227	227	227	252	252	227
		fz	0.017	0.017	0.017	0.017	0.026	0.026	0.026	0.023	0.023	0.021	0.032	0.029	0.029	0.029	0.036	0.036	0.032
		RPM	20164	20164	20164	20164	17212	17212	17212	15491	15491	13770	16065	14459	14459	14459	13388	13388	12049
		FEED	686	686	686	686	895	895	895	713	713	578	1028	839	839	839	964	964	771
		Ap	0.120	0.120	0.105	0.105	0.200	0.180	0.180	0.160	0.140	0.140	0.225	0.200	0.200	0.175	0.270	0.270	0.240
	11.1	Vc	190	190	190	190	216	216	216	195	195	173	252	227	227	227	252	252	227
		fz	0.017	0.017	0.017	0.017	0.026	0.026	0.026	0.023	0.023	0.021	0.032	0.029	0.029	0.029	0.036	0.036	0.032
		RPM	20164	20164	20164	20164	17212	17212	17212	15491	15491	13770	16065	14459	14459	14459	13388	13388	12049
		FEED	686	686	686	686	895	895	895	713	713	578	1028	839	839	839	964	964	771
		Ap	0.120	0.120	0.105	0.105	0.200	0.180	0.180	0.160	0.140	0.140	0.225	0.200	0.200	0.175	0.270	0.270	0.240
	11.2	Vc	153	153	153	153	170	170	170	153	153	136	201	181	181	181	201	201	181
		fz	0.018	0.018	0.018	0.018	0.027	0.027	0.027	0.024	0.024	0.022	0.032	0.029	0.029	0.029	0.037	0.037	0.033
		RPM	16229	16229	16229	16229	13524	13524	13524	12172	12172	10819	12786	11507	11507	11507	10655	10655	9590
		FEED	584	584	584	584	730	730	730	584	584	476	818	667	667	667	788	788	633
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204
H	38.1	Vc	153	153	153	153	170	170	170	153	153	136	201	181	181	181	201	201	181
		fz	0.018	0.018	0.018	0.018	0.027	0.027	0.027	0.024	0.024	0.022	0.032	0.029	0.029	0.029	0.037	0.037	0.033
		RPM	16229	16229	16229	16229	13524	13524	13524	12172	12172	10819	12786	11507	11507	11507	10655	10655	9590
		FEED	584	584	584	584	730	730	730	584	584	476	818	667	667	667	788	788	633
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204
	38.2	Vc	102	102	102	102	113	113	113	102	102	91	134	121	121	121	134	134	121
		fz	0.016	0.016	0.016	0.016	0.025	0.025	0.025	0.023	0.023	0.020	0.030	0.027	0.027	0.027	0.035	0.035	0.032
		RPM	10819	10819	10819	10819	9017	9017	9017	8115	8115	7214	8524	7672	7672	7672	7104	7104	6394
		FEED	346	346	346	346	451	451	451	373	373	289	511	414	414	414	497	497	409
		Ap	0.102	0.102	0.089	0.089	0.170	0.153	0.153	0.136	0.119	0.119	0.191	0.170	0.170	0.149	0.230	0.230	0.204
	39.1	Vc	83	83	83	83	93	93	93	83	83	74	103	93	93	93	103	103	93
		fz	0.013	0.013	0.013	0.013	0.019	0.019	0.019	0.017	0.017	0.015	0.022	0.020	0.020	0.020	0.026	0.026	0.023
		RPM	8852	8852	8852	8852	7377	7377	7377	6639	6639	5902	6557	5901	5901	5901	5464	5464	4918
		FEED	230	230	230	230	280	280	280	226	226	177	289	236	236	236	284	284	226
		Ap	0.096	0.096	0.084	0.084	0.160	0.144	0.144	0.128	0.112	0.112	0.180	0.160	0.160	0.140	0.216	0.216	0.192
	39.2	Vc	65	65	65	65	72	72	72	65	65	58	82	74	74	74	82	82	74
		fz	0.010	0.010	0.010	0.010	0.015	0.015	0.015	0.014	0.014								