




**CARBIDE, 6 FLUTE 45° HELIX CORNER RADIUS with EXTENDED NECK**

**VOLLHARTMETALL, 6 SCHNEIDEN 45° RECHTSSPIRALE ECKENRADIUS mit ABGESETZTEM SCHAFTTEIL**  
**Fraise carbure, 6 dents, torique, hélice 45°, détalonnée**  
**6 TAGLIENTI, TORICA, ELICA 45°, SCARICATA**

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible by reduced neck.
- ▶ Corner radius for preventing the chipping in high speed machining.
- ▶ Higher wear-resistance.

- ▶ Geeignet zum Fräsen hochgehärteter Stähle.
- ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
- ▶ Excellente Werkstückoberflächen.
- ▶ Abgesetzter Schaft für größere Reichweite.
- ▶ Schneidkantenschutz durch definierten Radius.
- ▶ Höhere Verschleißfestigkeit.

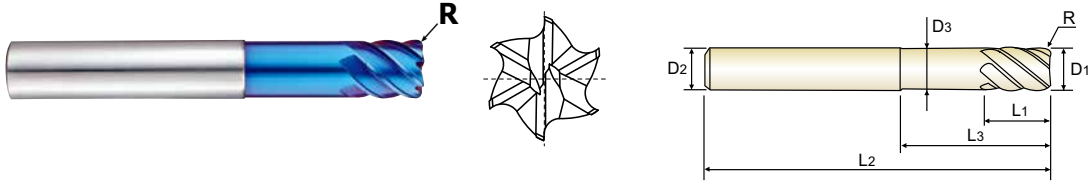

Ø6    Ø8-Ø20

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.010)	D1	D2	L1	L3	L2	D3
G8A39916	R0.25	6.0	6	6	14	50	5.85
G8A39060	R0.5	6.0	6	6	14	50	5.85
G8A39901	R0.5	6.0	6	13	-	70	-
* G8A39910	R0.5	6.0	6	26	-	70	-
G8A39080	R0.5	8.0	8	8	24	60	7.7
G8A39902	R0.5	8.0	8	19	-	90	-
* G8A39911	R0.5	8.0	8	36	-	90	-
G8A39903	R0.5	10.0	10	22	-	100	-
G8A39100	R1.0	10.0	10	10	30	70	9.7
G8A39904	R1.0	10.0	10	22	-	100	-
* G8A39912	R1.0	10.0	10	46	-	100	-
G8A39905	R0.5	12.0	12	26	-	110	-
G8A39120	R1.0	12.0	12	12	30	75	11.7
G8A39906	R1.0	12.0	12	26	-	110	-
* G8A39913	R1.0	12.0	12	56	-	110	-
G8A39160	R1.0	16.0	16	32	-	130	-
G8A39907	R1.5	16.0	16	32	-	130	-
* G8A39914	R1.5	16.0	16	66	-	130	-
G8A39200	R1.0	20.0	20	38	-	140	-
G8A39908	R1.5	20.0	20	38	-	140	-
G8A39909	R2.0	20.0	20	38	-	140	-
* G8A39915	R2.0	20.0	20	76	-	140	-

Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool.

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

\* Mill Dia. Tolerance(mm) for Extra Long Type : 0~-0.03

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○		○										
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎

## G8A39 SERIES

### 6 FLUTE - SIDE CUTTING

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)					
						6.0	8.0	10.0	12.0	16.0	20.0
P	5	Non-alloy steel	0.05D	1.0D	Vc	120	121	121	122	121	121
					fz	0.039	0.052	0.063	0.07	0.09	0.079
					RPM	6366	4814	3852	3236	2407	1926
					FEED	1490	1502	1456	1359	1300	913
	8-9	Low alloy steel	0.05D	1.0D	Vc	120	121	121	122	121	121
					fz	0.039	0.052	0.063	0.07	0.09	0.079
					RPM	6366	4814	3852	3236	2407	1926
					FEED	1490	1502	1456	1359	1300	913
	11.1	High alloyed steel, and tool steel	0.05D	1.0D	Vc	120	121	121	122	121	121
					fz	0.039	0.052	0.063	0.07	0.09	0.079
					RPM	6366	4814	3852	3236	2407	1926
					FEED	1490	1502	1456	1359	1300	913
11.2	High alloyed steel, and tool steel	0.05D	1.0D	Vc	106	108	106	106	108	110	
				fz	0.036	0.049	0.058	0.065	0.083	0.095	
				RPM	5623	4297	3374	2812	2149	1751	
				FEED	1215	1263	1174	1097	1070	998	
H	38.1	Hardened steel	0.05D	1.0D	Vc	106	108	106	106	108	110
					fz	0.036	0.049	0.058	0.065	0.083	0.095
					RPM	5623	4297	3374	2812	2149	1751
					FEED	1215	1263	1174	1097	1070	998
	38.2	Hardened steel	0.05D	1.0D	Vc	95	97	94	95	97	98
					fz	0.035	0.046	0.055	0.062	0.079	0.091
					RPM	5040	3860	2992	2520	1930	1560
					FEED	1058	1065	987	937	915	852
	39.1	Hardened steel	0.03D	1.0D	Vc	83	83	82	83	83	87
					fz	0.033	0.044	0.053	0.059	0.076	0.072
					RPM	4403	3302	2610	2202	1651	1385
					FEED	872	872	830	780	753	598
	39.2	Hardened steel	0.03D	1.0D	Vc	72	72	72	72	72	75
					fz	0.031	0.042	0.05	0.056	0.072	0.069
					RPM	3820	2865	2292	1910	1432	1194
					FEED	711	722	688	642	619	494
	39.3	Hardened steel	0.03D	1.0D	Vc	48	48	49	50	48	45
					fz	0.028	0.037	0.045	0.05	0.064	0.071
					RPM	2546	1910	1560	1326	955	716
					FEED	428	424	421	398	367	305
	40	Chilled Cast Iron	0.05D	1.0D	Vc	106	108	106	106	108	110
					fz	0.036	0.049	0.058	0.065	0.083	0.095
					RPM	5623	4297	3374	2812	2149	1751
					FEED	1215	1263	1174	1097	1070	998
41	Hardened Cast Iron	0.05D	1.0D	Vc	95	97	94	95	97	98	
				fz	0.035	0.046	0.055	0.062	0.079	0.091	
				RPM	5040	3860	2992	2520	1930	1560	
				FEED	1058	1065	987	937	915	852	



SELECTION GUIDE



SERIES	G8B59	G8B54	G8A46	G8A54
FLUTE	4	4	2	2
HELIX ANGLE	0°	0°	30°	30°
CUTTING EDGE SHAPE	CORNER RADIUS	CORNER RADIUS	BALL NOSE	BALL NOSE
SIZE MIN	D2.0	D2.0	R0.05	R0.25
SIZE MAX	D12.0	D16.0	R2.0	R1.0
PAGE	105	106	107	111

SOLID CARBIDE  
**X5070**  
END MILLS

High Hardened Steels HRc45 to HRc70,  
High Speed Machining, Dry Cutting




Please visit  
[globalyg1.com/mat](http://globalyg1.com/mat)  
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 139

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc				
P	1	Non-alloy steel	About 0.15% C Annealed	125					
	2		About 0.45% C Annealed	190	13				
	3		About 0.45% C Quenched & Tempered	250	25				
	4		About 0.75% C Annealed	270	28				
	5		About 0.75% C Quenched & Tempered	300	32	○	○	○	○
	6	Low alloy steel	Annealed	180	10				
	7		Quenched & Tempered	275	29				
	8		Quenched & Tempered	300	32	○	○	○	○
	9		Quenched & Tempered	350	38	○	○	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15			
	11	Quenched & Tempered		325	35	○	○	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15				
	13		Martensitic Quenched & Tempered	240	23				
	14		Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10				
	16		Pearlitic (Martensitic)	260	26				
	17	Nodular cast iron	Ferritic	160	3				
	18		Pearlitic	250	25				
	19	Malleable cast iron	Ferritic	130					
20	Pearlitic		230	21					
N	21	Aluminum-wrought alloy	Not Curable	60					
	22		Curable Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28		CuSn, lead-free copper and electrolytic copper	100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm					
37	Alpha + Beta Alloys		Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55	◎	◎	◎	◎
	39		Hardened	630	60	◎	◎	◎	◎
	40	Chilled Cast Iron	Cast	400	42	○	○	○	○
	41	Hardened Cast Iron	Hardened	550	55	◎	◎	◎	◎

G8A28	G8A38	G8A53	G8A59	G8D62	G8A60	G8A36	G8A52	G8A50	G8A47	G8A37	G8B08	G8A39
2	2	2	3	4	2	2	2	2	4	4	4	6
30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	45°
BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS
R0.05	R0.5	R0.2	R1.5	R1.5	D0.5	D0.3	D0.5	D0.3	D3.0	D1.0	D6.0	D6.0
R6.0	R12.5	R1.0	R10.0	R10.0	D12.0	D20.0	D2.0	D2.0	D12.0	D20.0	D12.0	D20.0
112	114	115	116	117	118	123	125	126	127	128	129	130
-	EXTENDED NECK	MINIATURE	Center Match	Center Match	RIB PROCESSING	EXTENDED NECK	RIB PROCESSING	MINIATURE	EXTENDED NECK	EXTENDED NECK	EXTENDED NECK	EXTENDED NECK
Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating

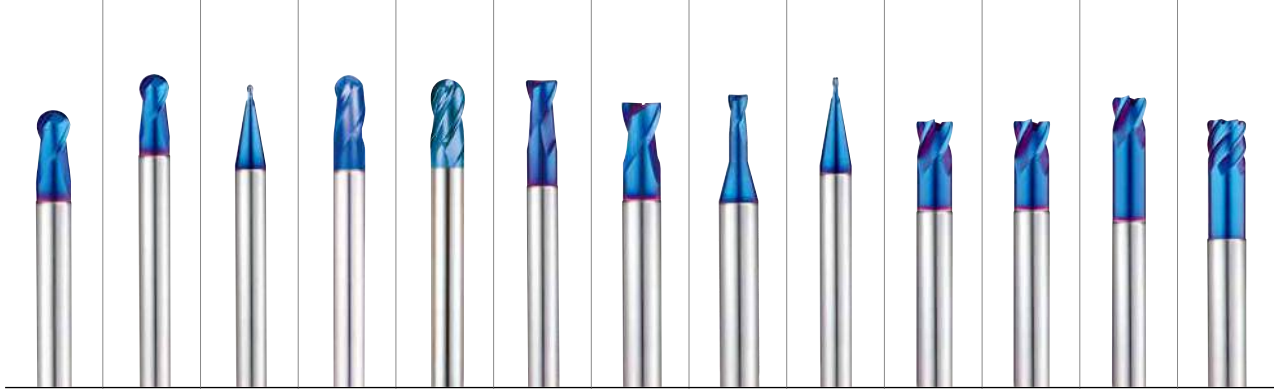

													1
													2
													3
													4
○	○	○	○	○	○	○	○	○	○	○	○	○	5
													6
													7
○	○	○	○	○	○	○	○	○	○	○	○	○	8
○	○	○	○	○	○	○	○	○	○	○	○	○	9
													10
○	○	○	○	○	○	○	○	○	○	○	○	○	11
													12
													13
													14
													15
													16
													17
													18
													19
													20
													21
													22
													23
													24
													25
													26
													27
													28
													29
													30
													31
													32
													33
													34
													35
													36
													37
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	38
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	39
○	○	○	○	○	○	○	○	○	○	○	○	○	40
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	41

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA