


CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- **VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN**
- 🇩🇪 **Fraise carbure, 2 dents, torique pour usinage de rainure**
- 🇮🇹 **2 TAGLIENTI, TORICA, SCARICATA PER ENRVATURE**

- ▶ Designed to machine high hardened materials.
 - ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
 - ▶ Excellent workpiece finish.
 - ▶ Deep slotting is possible by reduced neck.
 - ▶ Corner radius for preventing the chipping in high speed machining.
 - ▶ Higher wear-resistance.
- ▶ Geeignet zum Fräsen hochgehärteter Stähle.
 - ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
 - ▶ Excellente Werkstückoberflächen.
 - ▶ Abgesetzter Schaft für größere Reichweite.
 - ▶ Schneidkantenschutz durch definierten Radius.
 - ▶ Höhere Verschleißfestigkeit.



CARBIDE 2 BLUE 30° ±0.010 ±0.015 PLAIN P.146-147

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A60936	R0.05	0.5	4	0.7	1.5	45	0.45
G8A60932	R0.05	0.5	4	0.7	2.5	45	0.45
G8A60935	R0.05	0.5	4	0.7	4	45	0.45
G8A60931	R0.05	0.6	4	0.9	2	45	0.55
G8A60933	R0.05	0.6	4	0.9	3	45	0.55
G8A60934	R0.05	0.6	4	0.9	4	45	0.55
G8A600060102	R0.1	0.6	4	0.9	2	45	0.55
G8A600070104	R0.1	0.7	4	1	4	45	0.65
G8A600080102	R0.1	0.8	4	1.2	2	45	0.75
G8A60008	R0.1	0.8	4	1.2	4	45	0.75
G8A60924	R0.1	0.8	4	1.2	6	45	0.75
G8A609254S	R0.1	1.0	4	1.5	4	50	0.95
G8A609264S	R0.1	1.0	4	1.5	6	50	0.95
G8A600100204	R0.2	1.0	4	1.5	4	50	0.95
G8A600100206	R0.2	1.0	4	1.5	6	50	0.95
G8A609114S	R0.2	1.0	4	1.5	8	50	0.95
G8A600100304	R0.3	1.0	4	1.5	4	50	0.95
G8A600100306	R0.3	1.0	4	1.5	6	50	0.95
G8A60980	R0.3	1.0	4	1.5	8	50	0.95
G8A60925	R0.1	1.0	6	1.5	4	50	0.95
G8A60926	R0.1	1.0	6	1.5	6	50	0.95
G8A60010	R0.2	1.0	6	1.5	4	50	0.95

Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool. ▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good


ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○		○										
ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
- Fraise carbure, 2 dents, torique pour usinage de rainure
- 2 TAGLIANTI, TORICA, SCARICATA PER ENRVATURE

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible by reduced neck.
- ▶ Corner radius for preventing the chipping in high speed machining.
- ▶ Higher wear-resistance.

- ▶ Geeignet zum Fräsen hochgehärteter Stähle.
- ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
- ▶ Excellente Werkstückoberflächen.
- ▶ Abgesetzter Schaft für größere Reichweite.
- ▶ Schneidkantenschutz durch definierten Radius.
- ▶ Höhere Verschleißfestigkeit.

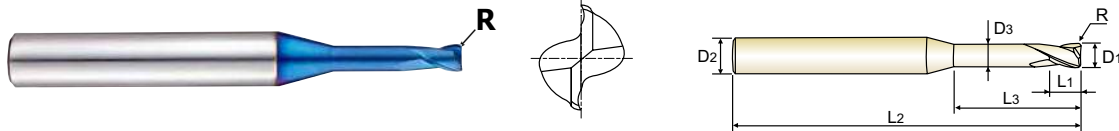

CARBIDE 2 BLUE 30° ±0.010 ±0.015 PLAIN P.146-147

Ø0.5-Ø6 Ø8-Ø12

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A60910	R0.2	1.0	6	1.5	6	50	0.95
G8A60911	R0.2	1.0	6	1.5	8	50	0.95
G8A60912	R0.3	1.0	6	1.5	4	50	0.95
G8A60930	R0.3	1.0	6	1.5	6	50	0.95
G8A600100308	R0.3	1.0	6	1.5	8	50	0.95
G8A600154S	R0.2	1.5	4	2.5	4	50	1.45
G8A6001502064S	R0.2	1.5	4	2.5	6	50	1.45
G8A6001502084S	R0.2	1.5	4	2.5	8	50	1.45
G8A609134S	R0.2	1.5	4	2.5	10	50	1.45
G8A609144S	R0.2	1.5	4	2.5	12	50	1.45
G8A609154S	R0.3	1.5	4	2.5	4	50	1.45
G8A6001503064S	R0.3	1.5	4	2.5	6	50	1.45
G8A6001503084S	R0.3	1.5	4	2.5	8	50	1.45
G8A60015	R0.2	1.5	6	2.5	4	50	1.45
G8A600150206	R0.2	1.5	6	2.5	6	50	1.45
G8A600150208	R0.2	1.5	6	2.5	8	50	1.45
G8A60913	R0.2	1.5	6	2.5	10	50	1.45
G8A60914	R0.2	1.5	6	2.5	12	50	1.45
G8A60915	R0.3	1.5	6	2.5	4	50	1.45
G8A600150306	R0.3	1.5	6	2.5	6	50	1.45
G8A600150308	R0.3	1.5	6	2.5	8	50	1.45
G8A609274S	R0.2	2.0	4	3	6	50	1.95

Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool.

▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○	○											
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎

YG X5070 END MILLS


PLAIN SHANK

G8A60 SERIES

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- **VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN**
- **Fraise carbure, 2 dents, torique pour usinage de rainure**
- **2 TAGLIENTI, TORICA, SCARICATA PER ENRVATURE**

- ▶ Designed to machine high hardened materials.
 - ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
 - ▶ Excellent workpiece finish.
 - ▶ Deep slotting is possible by reduced neck.
 - ▶ Corner radius for preventing the chipping in high speed machining.
 - ▶ Higher wear-resistance.
- ▶ Geeignet zum Fräsen hochgehärteter Stähle.
 - ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
 - ▶ Excellente Werkstückoberflächen.
 - ▶ Abgesetzter Schaft für größere Reichweite.
 - ▶ Schneidkantenschutz durch definierten Radius.
 - ▶ Höhere Verschleißfestigkeit.

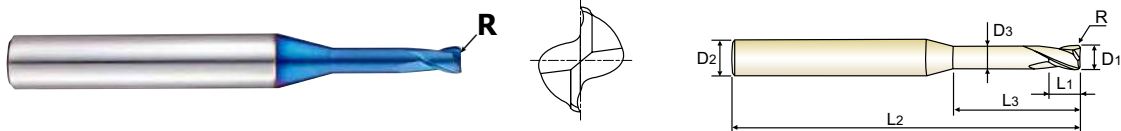

CARBIDE
2
BLUE
30°
±0.010
±0.015
PLAIN
P.146-147

Ø0.5-Ø6 Ø8-Ø12

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A6002002084S	R0.2	2.0	4	3	8	50	1.95
G8A6002002104S	R0.2	2.0	4	3	10	55	1.95
G8A6002002124S	R0.2	2.0	4	3	12	55	1.95
G8A609164S	R0.3	2.0	4	3	6	50	1.95
G8A6002003084S	R0.3	2.0	4	3	8	50	1.95
G8A6002003104S	R0.3	2.0	4	3	10	55	1.95
G8A6002003124S	R0.3	2.0	4	3	12	55	1.95
G8A6002003164S	R0.3	2.0	4	3	16	55	1.95
G8A609174S	R0.5	2.0	4	3	6	50	1.95
G8A600204S	R0.5	2.0	4	3	10	55	1.95
G8A609184S	R0.5	2.0	4	3	12	55	1.95
G8A60927	R0.2	2.0	6	3	6	50	1.95
G8A600200208	R0.2	2.0	6	3	8	50	1.95
G8A600200210	R0.2	2.0	6	3	10	55	1.95
G8A600200212	R0.2	2.0	6	3	12	55	1.95
G8A60916	R0.3	2.0	6	3	6	50	1.95
G8A600200308	R0.3	2.0	6	3	8	50	1.95
G8A600200310	R0.3	2.0	6	3	10	55	1.95
G8A600200312	R0.3	2.0	6	3	12	55	1.95
G8A600200316	R0.3	2.0	6	3	16	55	1.95
G8A60917	R0.5	2.0	6	3	6	50	1.95
G8A60020	R0.5	2.0	6	3	10	55	1.95

Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool. ▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○		○										
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎



X5070 END MILLS

PLAIN SHANK


G8A60 SERIES

CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN
- Fraise carbure, 2 dents, torique pour usinage de rainure
- 2 TAGLIANTI, TORICA, SCARICATA PER ENRVATURE

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible by reduced neck.
- ▶ Corner radius for preventing the chipping in high speed machining.
- ▶ Higher wear-resistance.

- ▶ Geeignet zum Fräsen hochgehärteter Stähle.
- ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
- ▶ Excellente Werkstückoberflächen.
- ▶ Abgesetzter Schaft für größere Reichweite.
- ▶ Schneidkantenschutz durch definierten Radius.
- ▶ Höhere Verschleißfestigkeit.



P.146-147

Ø0.5-Ø6 Ø8-Ø12

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A60918	R0.5	2.0	6	3	12	55	1.95
G8A600300208	R0.2	3.0	6	4	8	55	2.85
G8A600300210	R0.2	3.0	6	4	10	55	2.85
G8A600300212	R0.2	3.0	6	4	12	55	2.85
G8A600300216	R0.2	3.0	6	4	16	55	2.85
G8A600300308	R0.3	3.0	6	4	8	55	2.85
G8A60919	R0.3	3.0	6	4	10	55	2.85
G8A600300312	R0.3	3.0	6	4	12	55	2.85
G8A600300316	R0.3	3.0	6	4	16	55	2.85
G8A60030	R0.5	3.0	6	4	10	55	2.85
G8A600300512	R0.5	3.0	6	4	12	55	2.85
G8A60901	R0.5	3.0	6	4	16	55	2.85
G8A60902	R0.5	3.0	6	4	20	55	2.85
G8A600400212	R0.2	4.0	6	5	12	55	3.85
G8A600400216	R0.2	4.0	6	5	16	55	3.85
G8A600400220	R0.2	4.0	6	5	20	55	3.85
G8A600400310	R0.3	4.0	6	5	10	55	3.85
G8A60920	R0.3	4.0	6	5	12	55	3.85
G8A600400316	R0.3	4.0	6	5	16	55	3.85
G8A600400320	R0.3	4.0	6	5	20	55	3.85
G8A60040	R0.5	4.0	6	5	12	55	3.85
G8A60903	R0.5	4.0	6	5	16	55	3.85

Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool.

▶ NEXT PAGE

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○	○				○							

ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎





CARBIDE, 2 FLUTE CORNER RADIUS for RIB PROCESSING

- **VOLLHARTMETALL, 2 SCHNEIDEN ECKENRADIUS für SCHMALE RIPPEN**
- **Fraise carbure, 2 dents, torique pour usinage de rainure**
- **2 TAGLIENTI, TORICA, SCARICATA PER ENRVATURE**

- ▶ Designed to machine high hardened materials.
- ▶ Suitable for dry cutting, high speed cutting thanks to newly developed raw-material and new coating.
- ▶ Excellent workpiece finish.
- ▶ Deep slotting is possible by reduced neck.
- ▶ Corner radius for preventing the chipping in high speed machining.
- ▶ Higher wear-resistance.

- ▶ Geeignet zum Fräsen hochgehärteter Stähle.
- ▶ Geeignet zum Trockenfräsen und HSC-Fräsen dank neuentwickeltem Material und Beschichtung.
- ▶ Excellente Werkstückoberflächen.
- ▶ Abgesetzter Schaft für größere Reichweite.
- ▶ Schneidkantenschutz durch definierten Radius.
- ▶ Höhere Verschleißfestigkeit.

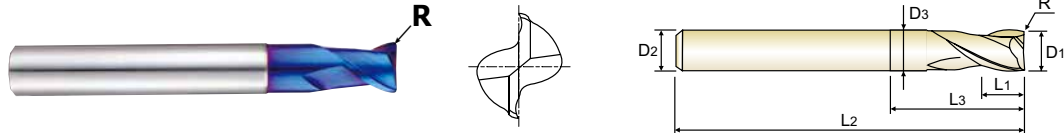

P.146-147

Ø0.5-Ø6 Ø8-Ø12

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
G8A60904	R0.5	4.0	6	5	20	55	3.85
G8A600401012	R1.0	4.0	6	5	12	55	3.85
G8A600401016	R1.0	4.0	6	5	16	55	3.85
G8A60921	R0.3	6.0	6	7	20	60	5.85
G8A60060	R0.5	6.0	6	7	20	60	5.85
G8A60905	R1.0	6.0	6	7	20	60	5.85
G8A60906	R1.5	6.0	6	7	20	60	5.85
G8A600602020	R2.0	6.0	6	7	20	60	5.85
G8A60922	R0.3	8.0	8	9	25	60	7.7
G8A60929	R0.5	8.0	8	9	25	60	7.7
G8A60080	R1.0	8.0	8	9	25	60	7.7
G8A60907	R1.5	8.0	8	9	25	60	7.7
G8A600802025	R2.0	8.0	8	9	25	60	7.7
G8A60923	R0.3	10.0	10	11	32	70	9.7
G8A601000532	R0.5	10.0	10	11	32	70	9.7
G8A60100	R1.0	10.0	10	11	32	70	9.7
G8A60908	R1.5	10.0	10	11	32	70	9.7
G8A601002032	R2.0	10.0	10	11	32	70	9.7
G8A601200538	R0.5	12.0	12	12	38	80	11.7
G8A60120	R1.0	12.0	12	12	38	80	11.7
G8A60909	R1.5	12.0	12	12	38	80	11.7
G8A601202038	R2.0	12.0	12	12	38	80	11.7

Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool.

Size	Corner Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to Ø6	± 0.010	0 ~ - 0.012	h5
over Ø6	± 0.015	0 ~ - 0.015	

◎ : Excellent ○ : Good

ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○		○										
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎




RECOMMENDED CUTTING CONDITIONS
EMPFOLHENE SCHNEIDPARAMETER

G8A60 SERIES **2 FLUTE CORNER RADIUS - SLOTTING**

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)											
						0.5	0.6	0.8	1.0	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	5	Non-alloy steel	1.0D	0.05D	Vc	80	95	125	150	210	205	210	245	245	250	245	250
					fz	0.001	0.002	0.002	0.006	0.01	0.015	0.021	0.026	0.029	0.037	0.043	0.051
					RPM	50930	50399	49736	47746	33423	21751	16711	15597	12998	9947	7799	6631
					FEED	102	202	199	573	668	653	702	811	754	736	671	676
	8-9	Low alloy steel	1.0D	0.05D	Vc	80	95	125	150	210	205	210	245	245	250	245	250
					fz	0.001	0.002	0.002	0.006	0.01	0.015	0.021	0.026	0.029	0.037	0.043	0.051
					RPM	50930	50399	49736	47746	33423	21751	16711	15597	12998	9947	7799	6631
					FEED	102	202	199	573	668	653	702	811	754	736	671	676
	11.1	High alloyed steel, and tool steel	1.0D	0.05D	Vc	80	95	125	150	210	205	210	245	245	250	245	250
					fz	0.001	0.002	0.002	0.006	0.01	0.015	0.021	0.026	0.029	0.037	0.043	0.051
					RPM	50930	50399	49736	47746	33423	21751	16711	15597	12998	9947	7799	6631
					FEED	102	202	199	573	668	653	702	811	754	736	671	676
11.2	High alloyed steel, and tool steel	1.0D	0.05D	Vc	70	85	100	120	165	165	165	195	195	195	195	200	
				fz	0.001	0.002	0.002	0.006	0.01	0.016	0.021	0.026	0.03	0.037	0.044	0.051	
				RPM	44563	45094	39789	38197	26261	17507	13130	12414	10345	7759	6207	5305	
				FEED	89	180	159	458	525	560	551	646	621	574	546	541	
H	38.1	Hardened steel	1.0D	0.05D	Vc	70	85	100	120	165	165	165	195	195	195	195	200
					fz	0.001	0.002	0.002	0.006	0.01	0.016	0.021	0.026	0.03	0.037	0.044	0.051
					RPM	44563	45094	39789	38197	26261	17507	13130	12414	10345	7759	6207	5305
					FEED	89	180	159	458	525	560	551	646	621	574	546	541
	38.2	Hardened steel	1.0D	0.05D	Vc	65	75	75	80	110	110	110	130	130	130	130	130
					fz	0.001	0.001	0.002	0.006	0.01	0.015	0.02	0.024	0.028	0.034	0.04	0.047
					RPM	41380	39789	29842	25465	17507	11671	8754	8276	6897	5173	4138	3448
					FEED	83	80	119	306	350	350	350	397	386	352	331	324
	39.1	Hardened steel	1.0D	0.05D	Vc	50	55	65	65	90	90	90	100	100	100	100	100
					fz	0.001	0.001	0.001	0.004	0.007	0.011	0.015	0.018	0.021	0.026	0.03	0.036
					RPM	31831	29178	25863	20690	14324	9549	7162	6366	5305	3979	3183	2653
					FEED	64	58	52	166	201	210	215	229	223	207	191	191
39.2	Hardened steel	1.0D	0.05D	Vc	40	45	50	50	70	70	70	80	80	80	80	80	
				fz	0.001	0.001	0.001	0.003	0.006	0.009	0.012	0.014	0.017	0.02	0.024	0.029	
				RPM	25465	23873	19894	15915	11141	7427	5570	5093	4244	3183	2546	2122	
				FEED	51	48	40	95	134	134	134	144	144	127	122	123	
39.3	Hardened steel	1.0D	0.02D	Vc	30	40	40	40	60	60	60	70	70	70	70	70	
				fz	0.001	0.001	0.001	0.003	0.005	0.007	0.01	0.012	0.014	0.017	0.021	0.024	
				RPM	19099	21221	15915	12732	9549	6366	4775	4456	3714	2785	2228	1857	
				FEED	19	25	29	71	90	89	96	105	100	95	91	90	
40	Chilled Cast Iron	1.0D	0.05D	Vc	70	85	100	120	165	165	165	195	195	195	195	200	
				fz	0.001	0.002	0.002	0.006	0.01	0.016	0.021	0.026	0.03	0.037	0.044	0.051	
				RPM	44563	45094	39789	38197	26261	17507	13130	12414	10345	7759	6207	5305	
				FEED	89	180	159	458	525	560	551	646	621	574	546	541	
41	Hardened Cast Iron	1.0D	0.05D	Vc	65	75	75	80	110	110	110	130	130	130	130	130	
				fz	0.001	0.001	0.002	0.006	0.01	0.015	0.02	0.024	0.028	0.034	0.04	0.047	
				RPM	41380	39789	29842	25465	17507	11671	8754	8276	6897	5173	4138	3448	
				FEED	83	80	119	306	350	350	350	397	386	352	331	324	




G8A60 SERIES

2 FLUTE CORNER RADIUS - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)											
						0.5	0.6	0.8	1.0	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	5	Non-alloy steel	0.03D	1.0D	Vc	80	95	125	150	210	205	210	245	245	250	245	250
					fz	0.002	0.003	0.003	0.009	0.014	0.022	0.03	0.037	0.041	0.053	0.062	0.072
					RPM	50930	50399	49736	47746	33423	21751	16711	15597	12998	9947	7799	6631
	8-9	Low alloy steel	0.03D	1.0D	Vc	80	95	125	150	210	205	210	245	245	250	245	250
					fz	0.002	0.003	0.003	0.009	0.014	0.022	0.03	0.037	0.041	0.053	0.062	0.072
					RPM	50930	50399	49736	47746	33423	21751	16711	15597	12998	9947	7799	6631
	11.1	High alloyed steel, and tool steel	0.03D	1.0D	Vc	80	95	125	150	210	205	210	245	245	250	245	250
					fz	0.002	0.003	0.003	0.009	0.014	0.022	0.03	0.037	0.041	0.053	0.062	0.072
					RPM	50930	50399	49736	47746	33423	21751	16711	15597	12998	9947	7799	6631
	11.2	High alloyed steel, and tool steel	0.03D	1.0D	Vc	70	85	100	120	165	165	165	195	195	195	195	200
					fz	0.002	0.002	0.003	0.009	0.015	0.022	0.03	0.037	0.043	0.053	0.063	0.074
					RPM	44563	45094	39789	38197	26261	17507	13130	12414	10345	7759	6207	5305
H	38.1	Hardened steel	0.03D	1.0D	Vc	70	85	100	120	165	165	165	195	195	195	195	200
					fz	0.002	0.002	0.003	0.009	0.015	0.022	0.03	0.037	0.043	0.053	0.063	0.074
					RPM	44563	45094	39789	38197	26261	17507	13130	12414	10345	7759	6207	5305
	38.2	Hardened steel	0.03D	1.0D	Vc	65	75	75	80	110	110	110	130	130	130	130	130
					fz	0.002	0.002	0.003	0.008	0.014	0.021	0.028	0.034	0.04	0.049	0.058	0.067
					RPM	41380	39789	29842	25465	17507	11671	8754	8276	6897	5173	4138	3448
	39.1	Hardened steel	0.03D	1.0D	Vc	50	55	65	65	90	90	90	100	100	100	100	100
					fz	0.001	0.002	0.002	0.006	0.01	0.016	0.021	0.026	0.03	0.037	0.043	0.051
					RPM	31831	29178	25863	20690	14324	9549	7162	6366	5305	3979	3183	2653
	39.2	Hardened steel	0.03D	1.0D	Vc	40	45	50	50	70	70	70	80	80	80	80	80
					fz	0.001	0.001	0.002	0.005	0.008	0.012	0.017	0.02	0.024	0.029	0.035	0.042
					RPM	25465	23873	19894	15915	11141	7427	5570	5093	4244	3183	2546	2122
39.3	Hardened steel	0.03D	1.0D	Vc	30	40	40	40	60	60	60	70	70	70	70	70	
				fz	0.001	0.001	0.001	0.004	0.007	0.01	0.014	0.017	0.02	0.024	0.029	0.034	
				RPM	19099	21221	15915	12732	9549	6366	4775	4456	3714	2785	2228	1857	
40	Chilled Cast Iron	0.03D	1.0D	Vc	70	85	100	120	165	165	165	195	195	195	195	200	
				fz	0.002	0.002	0.003	0.009	0.015	0.022	0.03	0.037	0.043	0.053	0.063	0.074	
				RPM	44563	45094	39789	38197	26261	17507	13130	12414	10345	7759	6207	5305	
41	Hardened Cast Iron	0.03D	1.0D	Vc	65	75	75	80	110	110	110	130	130	130	130	130	
				fz	0.002	0.002	0.003	0.008	0.014	0.021	0.028	0.034	0.04	0.049	0.058	0.067	
				RPM	41380	39789	29842	25465	17507	11671	8754	8276	6897	5173	4138	3448	



SELECTION GUIDE

HSS



SERIES	G8B59	G8B54	G8A46	G8A54
FLUTE	4	4	2	2
HELIX ANGLE	0°	0°	30°	30°
CUTTING EDGE SHAPE	CORNER RADIUS	CORNER RADIUS	BALL NOSE	BALL NOSE
SIZE MIN	D2.0	D2.0	R0.05	R0.25
SIZE MAX	D12.0	D16.0	R2.0	R1.0
PAGE	105	106	107	111
	HIGH FEED	HIGH FEED LONG SHANK	RIB PROCESSING	RIB PROCESSING
	Blue Coating	Blue Coating	Blue Coating	Blue Coating

SOLID CARBIDE
X5070
END MILLS

High Hardened Steels HRc45 to HRc70,
High Speed Machining, Dry Cutting




Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 139

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc				
P	1	Non-alloy steel	About 0.15% C Annealed	125					
	2		About 0.45% C Annealed	190	13				
	3		About 0.45% C Quenched & Tempered	250	25				
	4		About 0.75% C Annealed	270	28				
	5		About 0.75% C Quenched & Tempered	300	32	○	○	○	○
	6	Low alloy steel	Annealed	180	10				
	7		Quenched & Tempered	275	29				
	8		Quenched & Tempered	300	32	○	○	○	○
	9		Quenched & Tempered	350	38	○	○	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15			
	11	Quenched & Tempered		325	35	○	○	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15				
	13		Martensitic Quenched & Tempered	240	23				
	14		Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10				
	16		Pearlitic (Martensitic)	260	26				
	17	Nodular cast iron	Ferritic	160	3				
	18		Pearlitic	250	25				
	19	Malleable cast iron	Ferritic	130					
20	Pearlitic		230	21					
N	21	Aluminum-wrought alloy	Not Curable	60					
	22		Curable Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28		CuSn, lead-free copper and electrolytic copper	100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm					
37	Alpha + Beta Alloys Hardened		1050 Rm						
H	38	Hardened steel	Hardened	550	55	◎	◎	◎	◎
	39		Hardened	630	60	◎	◎	◎	◎
	40	Chilled Cast Iron	Cast	400	42	○	○	○	○
	41	Hardened Cast Iron	Hardened	550	55	◎	◎	◎	◎

G8A28	G8A38	G8A53	G8A59	G8D62	G8A60	G8A36	G8A52	G8A50	G8A47	G8A37	G8B08	G8A39
2	2	2	3	4	2	2	2	2	4	4	4	6
30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	45°
BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS
R0.05	R0.5	R0.2	R1.5	R1.5	D0.5	D0.3	D0.5	D0.3	D3.0	D1.0	D6.0	D6.0
R6.0	R12.5	R1.0	R10.0	R10.0	D12.0	D20.0	D2.0	D2.0	D12.0	D20.0	D12.0	D20.0
112	114	115	116	117	118	123	125	126	127	128	129	130
-	EXTENDED NECK	MINIATURE	Center Match	Center Match	RIB PROCESSING	EXTENDED NECK	RIB PROCESSING	MINIATURE	EXTENDED NECK	EXTENDED NECK	EXTENDED NECK	EXTENDED NECK
Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating

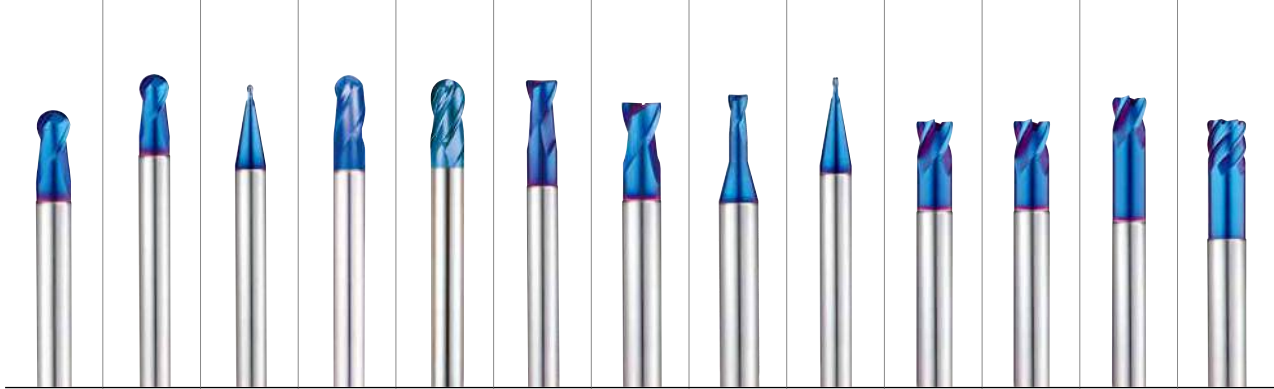

													1
													2
													3
													4
○	○	○	○	○	○	○	○	○	○	○	○	○	5
													6 P
○	○	○	○	○	○	○	○	○	○	○	○	○	7
○	○	○	○	○	○	○	○	○	○	○	○	○	8
○	○	○	○	○	○	○	○	○	○	○	○	○	9
○	○	○	○	○	○	○	○	○	○	○	○	○	10
													11
													12
													13 M
													14
													15
													16
													17 K
													18
													19
													20
													21
													22
													23
													24
													25 N
													26
													27
													28
													29
													30
													31
													32
													33
													34 S
													35
													36
													37
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	38
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	39
○	○	○	○	○	○	○	○	○	○	○	○	○	40
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	41

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA