

YG X5070 END MILLS

PLAIN SHANK


G8B54 SERIES

CARBIDE, 4 FLUTE STUB LENGTH CORNER RADIUS HIGH FEED (long shank)

- **VOLLHARTMETALL, 4 SCHNEIDEN EXTER KURZ ECKENRADIUS HOCHVORSCHUB**
- **Fraise carbure, 4 dents, torique, grande avance, extra-courte**
- **4 TAGLIENTI, TORICA EXTRA LUNGA**

- ▶ Excellent wear resistance at heavy feed rates on high hardened material.
- ▶ Designed with reduced clearance angles and short flutes for strength.
- ▶ High hardness & heat resistance coating for long life in dry applications.

- ▶ Hervorragende Verschleißigenschaften bei hohen Schnittwerten in gehärteten Materialien
- ▶ Mit reduzierten Freiwinkeln und kurzen Spannuten für hohe Festigkeiten konstruiert.
- ▶ Große Härte u. hitzebeständige Beschichtung für lange Lebensdauer bei Trockenbearbeitung

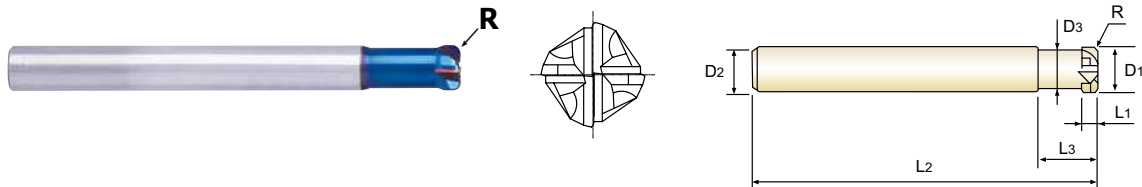


CARBIDE 4 BLUE 0° ±0.005 PLAIN P.139

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.005)	D1	D2	L1	L3	L2	D3
G8B5402005	R0.5	2.0	6	1	6	70	1.8
G8B5403005	R0.5	3.0	6	1.2	8	70	2.8
G8B5404005	R0.5	4.0	6	1.5	10	70	3.8
G8B5405005	R0.5	5.0	6	2	10	70	4.6
G8B5406005	R0.5	6.0	6	2.5	12	90	5.4
G8B5406010	R1.0	6.0	6	2.5	12	90	5.4
G8B5408010	R1.0	8.0	8	3.5	16	100	7.2
G8B5408020	R2.0	8.0	8	3.5	16	100	7.2
G8B5410010	R1.0	10.0	10	4	20	100	9
G8B5410020	R2.0	10.0	10	4	20	100	9
G8B5412020	R2.0	12.0	12	5	25	110	11
G8B5412030	R3.0	12.0	12	5	25	110	11
G8B5416030	R3.0	16.0	16	6.5	30	130	15

Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool.

Mill Dia. Tolerance (mm)	Corner Radius Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.02	± 0.005	h5

Comparison of the endteeth shape

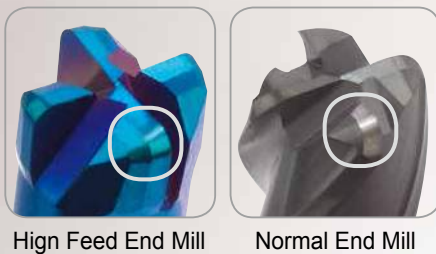


- Reduced clearance angles and short flutes strengthens corner radius and reduces chattering
- Extra-short flute length for high rigidity
- Heavy core with reduced diameter allows greater depths and maximum rigidity

◎ : Excellent ○ : Good

ISO Material Description	P											M			K						
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○		○										
ISO Material Description	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎



**RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER**



G8B59, G8B54 SERIES 4 FLUTE CORNER RADIUS - SIDE CUTTING

HIGH SPEED

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (∅)									
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	
P	5	Non-alloy steel	0.3D	0.1R	Vc	180	205	215	235	255	250	250	250	250	250
					fz	0.129	0.182	0.257	0.3	0.343	0.463	0.578	0.701	0.925	
					RPM	28648	21751	17109	14961	13528	9947	7958	6631	4974	
					FEED	14782	15835	17588	17953	18561	18422	18398	18595	18402	
	8-9	Low alloy steel	0.3D	0.1R	Vc	180	205	215	235	255	250	250	250	250	
					fz	0.129	0.182	0.257	0.3	0.343	0.463	0.578	0.701	0.925	
					RPM	28648	21751	17109	14961	13528	9947	7958	6631	4974	
					FEED	14782	15835	17588	17953	18561	18422	18398	18595	18402	
	11.1	High alloyed steel, and tool steel	0.3D	0.1R	Vc	180	205	215	235	255	250	250	250	250	
					fz	0.129	0.182	0.257	0.3	0.343	0.463	0.578	0.701	0.925	
					RPM	28648	21751	17109	14961	13528	9947	7958	6631	4974	
					FEED	14782	15835	17588	17953	18561	18422	18398	18595	18402	
11.2	High alloyed steel, and tool steel	0.3D	0.1R	Vc	140	160	165	175	200	200	200	200	195		
				fz	0.111	0.147	0.231	0.284	0.329	0.438	0.547	0.66	0.897		
				RPM	22282	16977	13130	11141	10610	7958	6366	5305	3879		
				FEED	9893	9982	12132	12656	13963	13942	13929	14006	13919		
H	38.1	Hardened steel	0.3D	0.1R	Vc	140	160	165	175	200	200	200	200	195	
					fz	0.111	0.147	0.231	0.284	0.329	0.438	0.547	0.66	0.897	
					RPM	22282	16977	13130	11141	10610	7958	6366	5305	3879	
					FEED	9893	9982	12132	12656	13963	13942	13929	14006	13919	
	38.2	Hardened steel	0.3D	0.1R	Vc	95	200	140	155	170	170	170	170	165	
					fz	0.131	0.16	0.209	0.25	0.306	0.404	0.509	0.611	0.833	
					RPM	15120	21221	11141	9868	9019	6764	5411	4509	3283	
					FEED	7923	13581	9314	9868	11039	10931	11017	11021	10938	
	39.1	Hardened steel	0.3D	0.05R	Vc	70	90	100	110	120	120	120	120	120	
					fz	0.101	0.121	0.172	0.214	0.25	0.349	0.447	0.547	0.729	
					RPM	11141	9549	7958	7003	6366	4775	3820	3183	2387	
					FEED	4501	4622	5475	5994	6366	6665	6830	6965	6961	
	39.2	Hardened steel	0.3D	0.05R	Vc	55	65	70	75	85	85	85	85	85	
					fz	0.07	0.091	0.129	0.158	0.2	0.301	0.352	0.4	0.5	
					RPM	8754	6897	5570	4775	4509	3382	2706	2255	1691	
					FEED	2451	2510	2874	3018	3608	4072	3810	3608	3382	
	40	Chilled Cast Iron	0.3D	0.1R	Vc	140	160	165	175	200	200	200	200	195	
					fz	0.111	0.147	0.231	0.284	0.329	0.438	0.547	0.66	0.897	
					RPM	22282	16977	13130	11141	10610	7958	6366	5305	3879	
					FEED	9893	9982	12132	12656	13963	13942	13929	14006	13919	
41	Hardened Cast Iron	0.3D	0.1R	Vc	95	200	140	155	170	170	170	170	165		
				fz	0.131	0.16	0.209	0.25	0.306	0.404	0.509	0.611	0.833		
				RPM	15120	21221	11141	9868	9019	6764	5411	4509	3283		
				FEED	7923	13581	9314	9868	11039	10931	11017	11021	10938		

NORMAL SPEED

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (∅)								
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0
P	5	Non-alloy steel	0.5D	0.2R	Vc	85	90	100	100	110	110	110	110	110
					fz	0.12	0.17	0.22	0.281	0.33	0.44	0.546	0.659	0.869
					RPM	13528	9549	7958	6366	5836	4377	3501	2918	2188
					FEED	6494	6494	7003	7156	7703	7703	7647	7691	7607
	8-9	Low alloy steel	0.5D	0.2R	Vc	85	90	100	100	110	110	110	110	110
					fz	0.12	0.17	0.22	0.281	0.33	0.44	0.546	0.659	0.869
					RPM	13528	9549	7958	6366	5836	4377	3501	2918	2188
					FEED	6494	6494	7003	7156	7703	7703	7647	7691	7607
	11.1	High alloyed steel, and tool steel	0.5D	0.2R	Vc	85	90	100	100	110	110	110	110	110
					fz	0.12	0.17	0.22	0.281	0.33	0.44	0.546	0.659	0.869
					RPM	13528	9549	7958	6366	5836	4377	3501	2918	2188
					FEED	6494	6494	7003	7156	7703	7703	7647	7691	7607
11.2	High alloyed steel, and tool steel	0.5D	0.2R	Vc	60	65	70	75	75	75	75	75	80	
				fz	0.099	0.15	0.2	0.25	0.299	0.402	0.5	0.598	0.79	
				RPM	9549	6897	5570	4775	3979	2984	2387	1989	1592	
				FEED	3782	4138	4456	4775	4759	4799	4775	4759	5029	
H	38.1	Hardened steel	0.5D	0.2R	Vc	60	65	70	75	75	75	75	75	80
					fz	0.099	0.15	0.2	0.25	0.299	0.402	0.5	0.598	0.79
					RPM	9549	6897	5570	4775	3979	2984	2387	1989	1592
					FEED	3782	4138	4456	4775	4759	4799	4775	4759	5029
	38.2	Hardened steel	0.5D	0.2R	Vc	35	45	50	55	55	55	55	55	55
					fz	0.1	0.151	0.2	0.235	0.302	0.398	0.5	0.603	0.795
					RPM	5570	4775	3979	3501	2918	2188	1751	1459	1094
					FEED	2228	2884	3183	3291	3525	3484	3501	3519	3480
	39.1	Hardened steel	0.5D	0.1R	Vc	20	25	30	35	35	35	35	35	35
					fz	0.078	0.101	0.132	0.182	0.25	0.33	0.42	0.5	0.661
					RPM	3183	2653	2387	2228	1857	1393	1114	928	696
					FEED	993	1072	1261	1622	1857	1838	1872	1857	1841
	39.2	Hardened steel	0.5D	0.1R	Vc	15	20	20	25	25	25	25	25	25
					fz	0.063	0.08	0.1	0.117	0.147	0.2	0.25	0.299	0.398
					RPM	2387	2122	1592	1592	1326	995	796	663	497
					FEED	602	679	637	745	780	796	796	793	792
	40	Chilled Cast Iron	0.5D	0.2R	Vc	60	65	70	75	75	75	75	75	80
					fz	0.099	0.15	0.2	0.25	0.299	0.402	0.5	0.598	0.79
					RPM	9549	6897	5570	4775	3979	2984	2387	1989	1592
					FEED	3782	4138	4456	4775	4759	4799	4775	4759	5029
41	Hardened Cast Iron	0.5D	0.2R	Vc	35	45	50	55	55	55	55	55	55	
				fz	0.1	0.151	0.2	0.235	0.302	0.398	0.5	0.603	0.795	
				RPM	5570	4775	3979	3501	2918	2188	1751	1459	1094	
				FEED	2228	2884	3183	3291	3525	3484	3501	3519	3480	

SELECTION GUIDE



SERIES	G8B59	G8B54	G8A46	G8A54
FLUTE	4	4	2	2
HELIX ANGLE	0°	0°	30°	30°
CUTTING EDGE SHAPE	CORNER RADIUS	CORNER RADIUS	BALL NOSE	BALL NOSE
SIZE MIN	D2.0	D2.0	R0.05	R0.25
SIZE MAX	D12.0	D16.0	R2.0	R1.0
PAGE	105	106	107	111

SOLID CARBIDE
X5070
END MILLS

High Hardened Steels HRc45 to HRc70,
High Speed Machining, Dry Cutting



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 139

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc				
P	1	Non-alloy steel	About 0.15% C Annealed	125					
	2		About 0.45% C Annealed	190	13				
	3		About 0.45% C Quenched & Tempered	250	25				
	4		About 0.75% C Annealed	270	28				
	5		About 0.75% C Quenched & Tempered	300	32	○	○	○	○
	6	Low alloy steel	Annealed	180	10				
	7		Quenched & Tempered	275	29				
	8		Quenched & Tempered	300	32	○	○	○	○
	9		Quenched & Tempered	350	38	○	○	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15			
	11	Quenched & Tempered		325	35	○	○	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15				
	13		Martensitic Quenched & Tempered	240	23				
	14		Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10				
	16		Pearlitic (Martensitic)	260	26				
	17	Nodular cast iron	Ferritic	160	3				
	18		Pearlitic	250	25				
	19	Malleable cast iron	Ferritic	130					
20	Pearlitic		230	21					
N	21	Aluminum-wrought alloy	Not Curable	60					
	22		Curable Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28		CuSn, lead-free copper and electrolytic copper	100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm					
37	Alpha + Beta Alloys		Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55	◎	◎	◎	◎
	39		Hardened	630	60	◎	◎	◎	◎
	40	Chilled Cast Iron	Cast	400	42	○	○	○	○
	41	Hardened Cast Iron	Hardened	550	55	◎	◎	◎	◎