


CARBIDE, 4 FLUTE BALL NOSE - Center Match

- **VOLLHARTMETALL, 4 SCHNEIDEN STIRNRADIUS - Schneiden Mittelpunkt**
- **Fraise carbure, 4 dents, hémisphérique - coupe au centre**
- **4 TAGLIANTI, SEMISFERICA - 4 TAGLIANTI A CENTRO FRESA**

- ▶ Applied center match type & special new design on ball center shape.
- ▶ Excellent high wear resistance and high performance.
- ▶ Applied for high speed and feed.
- ▶ Increased the surface roughness.
- ▶ Neues Design der Kugelschneidengeometrie
- ▶ Hohe Verschleißfestigkeit, hohe Leistung.
- ▶ Geeignet für hohe Schnittgeschwindigkeiten und hohe Vorschübe
- ▶ verbessert deutlich die Oberflächenrauigkeit

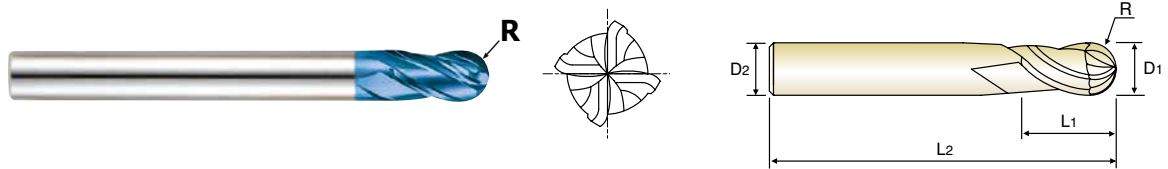

CARBIDE 4 BLUE 30° ±0.005 ±0.010 PLAIN P.145

R1.5-R3 R4-R10

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
G8D62030	R1.5	3.0	6	8	60
G8D62040	R2.0	4.0	6	8	70
G8D62050	R2.5	5.0	6	10	80
G8D62060	R3.0	6.0	6	12	90
G8D62080	R4.0	8.0	8	14	100
G8D62100	R5.0	10.0	10	18	100
G8D62120	R6.0	12.0	12	22	110
G8D62160	R8.0	16.0	16	30	140
G8D62200	R10.0	20.0	20	38	160

Due to the characteristics of the blue decoration layer, it might be erased during short term use and the color layer might not be uniformed. However, it doesn't affect the performance of the tool.

Size	Radius Tolerance (mm)	Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
up to R3	± 0.005	0 ~ - 0.012	h5
over R3	± 0.010	0 ~ - 0.015	


◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend					○				○	○	○										
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)	Non Metallic Materials	Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend																		◎	◎	○	◎

G8D62 SERIES
4 FLUTE BALL NOSE

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)								
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	5	Non-alloy steel	0.05D	0.02D	Vc	340	340	340	340	340	340	340	340	340
					fz	0.071	0.08	0.09	0.101	0.116	0.128	0.145	0.144	0.144
					RPM	36075	27056	21645	18038	13528	10823	9019	6764	5411
	8-9	Low alloy steel	0.05D	0.02D	Vc	340	340	340	340	340	340	340	340	340
					fz	0.071	0.08	0.09	0.101	0.116	0.128	0.145	0.144	0.144
					RPM	36075	27056	21645	18038	13528	10823	9019	6764	5411
	11.1 - 11.2	High alloyed steel, and tool steel	0.05D	0.02D	Vc	340	340	340	340	340	340	340	340	340
					fz	0.071	0.08	0.09	0.101	0.116	0.128	0.145	0.144	0.144
					RPM	36075	27056	21645	18038	13528	10823	9019	6764	5411
H	38.1 - 38.2	Hardened steel	0.05D	0.02D	Vc	285	285	280	285	285	285	285	285	285
					fz	0.06	0.07	0.081	0.092	0.103	0.111	0.125	0.129	0.126
					RPM	30239	22680	17825	15120	11340	9072	7560	5670	4536
	39.1		0.05D	0.02D	Vc	230	230	230	230	230	230	230	230	230
					fz	0.05	0.06	0.071	0.082	0.096	0.104	0.115	0.119	0.119
					RPM	24404	18303	14642	12202	9151	7321	6101	4576	3661
	39.2	0.05D	0.02D	Vc	210	210	210	210	210	210	210	210	205	
				fz	0.045	0.055	0.067	0.077	0.089	0.095	0.097	0.096	0.096	
				RPM	22282	16711	13369	11141	8356	6685	5570	4178	3263	
	39.3	0.05D	0.02D	Vc	145	145	145	145	145	145	145	145	140	
				fz	0.04	0.05	0.062	0.072	0.082	0.096	0.094	0.096	0.097	
				RPM	15385	11539	9231	7692	5769	4615	3846	2885	2228	
	40	Chilled Cast Iron	0.05D	0.02D	Vc	340	340	340	340	340	340	340	340	340
					fz	0.071	0.08	0.09	0.101	0.116	0.128	0.145	0.144	0.144
					RPM	36075	27056	21645	18038	13528	10823	9019	6764	5411
	41	Hardened Cast Iron	0.05D	0.02D	Vc	285	285	280	285	285	285	285	285	285
					fz	0.06	0.07	0.081	0.092	0.103	0.111	0.125	0.129	0.126
					RPM	30239	22680	17825	15120	11340	9072	7560	5670	4536



SELECTION GUIDE

HSS



SERIES	G8B59	G8B54	G8A46	G8A54
FLUTE	4	4	2	2
HELIX ANGLE	0°	0°	30°	30°
CUTTING EDGE SHAPE	CORNER RADIUS	CORNER RADIUS	BALL NOSE	BALL NOSE
SIZE MIN	D2.0	D2.0	R0.05	R0.25
SIZE MAX	D12.0	D16.0	R2.0	R1.0
PAGE	105	106	107	111
	HIGH FEED	HIGH FEED LONG SHANK	RIB PROCESSING	RIB PROCESSING
	Blue Coating	Blue Coating	Blue Coating	Blue Coating

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA

SOLID CARBIDE
X5070
END MILLS

High Hardened Steels HRc45 to HRc70,
High Speed Machining, Dry Cutting



Please visit globalyg1.com/mat for material search


◎ : Excellent ○ : Good

Recommended cutting conditions : P 139



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc				
P	1	Non-alloy steel	About 0.15% C Annealed	125					
	2		About 0.45% C Annealed	190	13				
	3		About 0.45% C Quenched & Tempered	250	25				
	4		About 0.75% C Annealed	270	28				
	5		About 0.75% C Quenched & Tempered	300	32	○	○	○	○
	6	Low alloy steel	Annealed	180	10				
	7		Quenched & Tempered	275	29				
	8		Quenched & Tempered	300	32	○	○	○	○
	9		Quenched & Tempered	350	38	○	○	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15			
	11	Quenched & Tempered		325	35	○	○	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15				
	13		Martensitic Quenched & Tempered	240	23				
	14		Austenitic	180	10				
K	15	Grey cast iron	Pearlitic / ferritic	180	10				
	16		Pearlitic (Martensitic)	260	26				
	17	Nodular cast iron	Ferritic	160	3				
	18		Pearlitic	250	25				
	19	Malleable cast iron	Ferritic	130					
20	Pearlitic		230	21					
N	21	Aluminum-wrought alloy	Not Curable	60					
	22		Curable Hardened	100					
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75					
	24		≤ 12% Si, Curable Hardened	90					
	25		> 12% Si, Not Curable	130					
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110					
	27		CuZn, CuSnZn (Brass)	90					
	28		CuSn, lead-free copper and electrolytic copper	100					
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium	400 Rm					
37	Alpha + Beta Alloys		Hardened	1050 Rm					
H	38	Hardened steel	Hardened	550	55	◎	◎	◎	◎
	39		Hardened	630	60	◎	◎	◎	◎
	40	Chilled Cast Iron	Cast	400	42	○	○	○	○
	41	Hardened Cast Iron	Hardened	550	55	◎	◎	◎	◎

G8A28	G8A38	G8A53	G8A59	G8D62	G8A60	G8A36	G8A52	G8A50	G8A47	G8A37	G8B08	G8A39
2	2	2	3	4	2	2	2	2	4	4	4	6
30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	45°
BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS
R0.05	R0.5	R0.2	R1.5	R1.5	D0.5	D0.3	D0.5	D0.3	D3.0	D1.0	D6.0	D6.0
R6.0	R12.5	R1.0	R10.0	R10.0	D12.0	D20.0	D2.0	D2.0	D12.0	D20.0	D12.0	D20.0
112	114	115	116	117	118	123	125	126	127	128	129	130
-	EXTENDED NECK	MINIATURE	Center Match	Center Match	RIB PROCESSING	EXTENDED NECK	RIB PROCESSING	MINIATURE	EXTENDED NECK	EXTENDED NECK	EXTENDED NECK	EXTENDED NECK
Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating	Blue Coating

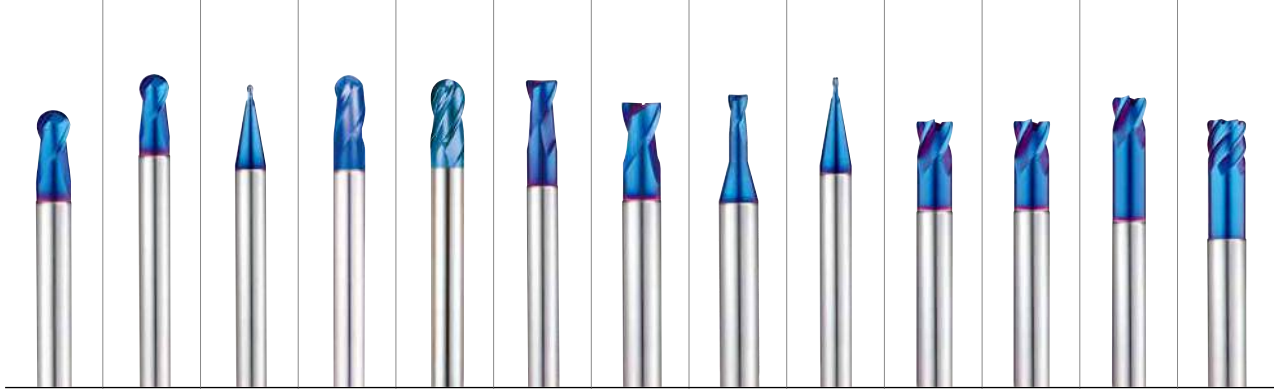

													1
													2
													3
													4
○	○	○	○	○	○	○	○	○	○	○	○	○	5
													6 P
○	○	○	○	○	○	○	○	○	○	○	○	○	7
○	○	○	○	○	○	○	○	○	○	○	○	○	8
○	○	○	○	○	○	○	○	○	○	○	○	○	9
○	○	○	○	○	○	○	○	○	○	○	○	○	10
													11
													12
													13 M
													14
													15
													16
													17 K
													18
													19
													20
													21
													22
													23
													24
													25 N
													26
													27
													28
													29
													30
													31
													32
													33
													34 S
													35
													36
													37
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	38
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	39
○	○	○	○	○	○	○	○	○	○	○	○	○	40
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	41

HSS

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA