
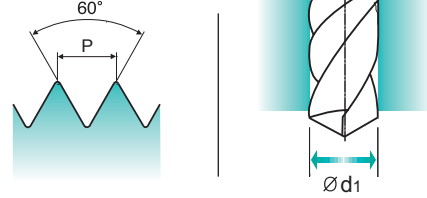
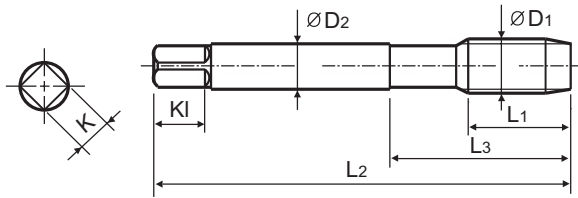


UNF Unified fine threads
 Unified Feingewinde
 UNF
 Unificato passo fine

▶ This tap is a serial hand tap in set, First and Bottoming.
 ▶ Bottoming tap of set has final internal thread dimensions only.

▶ Handgewindebohrersatz mit Vor- und Fertigschneider.
 ▶ Nur der Fertigschneider kann das gewünschte Gewinde schneiden.



Material groups: **GS** HSS DIN 2181 2B 60° I/III Bright

Sets of taps
 Gewindebohrer-Satz

Unit : mm

SIZE	TPI	EDP No.	Thread Length	Overall Length	Neck Length	Shank Diameter	Square Size	Square Length	No. of Flute	Tapping Drill Diameter
ØD1		Bright	L1	L2	L3	ØD2	K	KI	Z	Ød1
#4 - 48 UNF		T7509189	10	42	18	3.5	2.7	6	3	2.4
#5 - 44 UNF		T7509229	10	42	18	3.5	2.7	6	3	2.7
#6 - 40 UNF		T7509269	11	45	18	4	3	6	3	3
#8 - 36 UNF		T7509309	12	48	23	4.5	3.4	6	3	3.5
#10 - 32 UNF		T7509349	14	52	22	6	4.9	8	3	4.1
#12 - 28 UNF		T7509389	16	56	24	6	4.9	8	3	4.7
1/4 - 28 UNF		T7509429	16	56	24	6	4.9	8	3	5.5
5/16 - 24 UNF		T7509469	17	63	27	6	4.9	8	3	6.9
3/8 - 24 UNF		T7509509	18	63	27	7	5.5	8	4	8.5
7/16 - 20 UNF		T7509549	20	70	32	8	6.2	9	4	9.9
1/2 - 20 UNF		T7509589	20	70	32	9	7	10	4	11.5
9/16 - 18 UNF		T7509629	20	70	32	11	9	12	4	12.9
5/8 - 18 UNF		T7509669	20	70	32	12	9	12	4	14.5
3/4 - 16 UNF		T7509729	22	80	38	14	11	14	4	17.5
7/8 - 14 UNF		T7509769	22	80	38	18	14.5	17	4	20.5
1 - 12 UNF		T7509809	22	90	40	18	14.5	17	4	23.25
1-1/8 - 12 UNF		T7509849	22	90	40	22	18	21	4	26.5

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	○	○	○	○	○										○	○			
ISO	N					S										H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended					○	○	○														

SURFACE TREATMENT AND COATING

The applied High Speed Steels holds a grant of good wear resistance and toughness. Therefore YG-1 normally delivers taps with bright and unfinished surface. For certain materials, various surface treatments provide higher advantage in machining.

STEAM TEMPERED - Vap

Steam Tempered is a Fe₃O₄-oxyd-coating which reduces friction between the tool and workpiece, also preventing cold welding.

NITRIDING - NI

Recommend surface treatment for machining materials that affect wear abrasion, such as grey cast iron, alu-alloys with high Si-percentages (more than 10%).

Below are the various surface treatments for excellent finish surfaces suitable for many applications. The surface treatments are produced and developed within the company.

TiN-COATING

TiN-coating yields a hardness of approx. 2,300 HV and also a heat resistant up to approx. 600°C. The current coating is an excellent all-round coating for normal applications.

Colour : Golden Coefficient of friction against steel : 0.4

TiCN-COATING

TiCN takes place of TiN when the conditions require the coating to have a different hardness and toughness.

The TiCN brings advantages for machining very difficult steels or cutting interrupted bores.

The TiCN-coating has a hardness of approx. 3,000 HV, but is heat resistance only holds up to approx. 400°C, meaning that the TiCN needs an excellent cooling system for a long service life.

Colour : Blue-Grey Coefficient of friction against steel : 0.4

TiAlN-COATING

A special coating for machining abrasive materials such as grey cast iron, alu-alloys with silicon, fiber reinforced plastics, etc., or machining at high temperatures with insufficient cooling, or at high speeds ≥ 600 m/min. TiAlN has a hardness of approx. 3,000 HV and is heat resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.4

Hardslick-COATING

Hardslick combines the advantages of an extremely hard, thermally stable TiAlN-coating with the sliding and lubricating properties of an outer WC/C(Tungsten carbide/carbon)-coating in a novel way. The Hardslick coating has a hardness of approx. 3,000 HV and is temperature-resistant up to approx. 800°C.

Colour : Violet-Grey Coefficient of friction against steel : 0.2

SELECTION GUIDE



**HSS & HSS-E
YG TAP
GENERAL**


Suitable for Tapping Blind / Through Holes due to Flute Geometry and Excellent Chip Evacuation



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

HOLE TYPE	Max. 2.0xD Blind/Through Hole		
TOOL MATERIAL	HSS		
CHAMFER LEAD ACC. TO DIN2197	I / II / III	I / III	
FLUTE TYPE	Straight Flute	Straight Flute	
SPIRAL FLUTE ANGLE	-	-	
MODEL	M	DIN371/376	
		DIN352	T7109 (P.151)
		DIN357/LONG	
	MF	DIN374	
		DIN2181	T7309 (P.153)
	UNC	DIN371/376	
		DIN351	
	UNF	DIN371/374	
		DIN2181	
	BSW	DIN2182/2183	
		DIN351	
G(BSP)	DIN5156/5157		
EG-M	DIN371/376		
EG-UNC	DIN371/376		
EG-UNF	DIN371/374		
SURFACE TREATMENT	Bright	Bright	

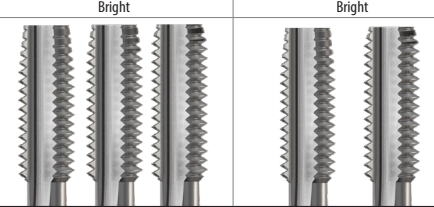

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc		
P	1	Non-alloy steel	About 0.15% C Annealed	125		○	○
	2		About 0.45% C Annealed	190	13	○	○
	3		About 0.45% C Quenched & tempered	250	25	○	○
	4		About 0.75% C Annealed	270	28	○	○
	5	About 0.75% C Quenched & tempered	300	32			
	6	Low alloy steel	Annealed	180	10	○	○
	7		Quenched & tempered	275	29	○	○
	8		Quenched & tempered	300	32		
	9		Quenched & tempered	350	38		
	10		High alloyed steel, and tool steel	Annealed	200	15	
	11		Quenched & Tempered	325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15		
	13		Martensitic Quenched & Tempered	240	23		
	14		Austenitic	180	10		
K	15	Grey cast iron	Pearlitic / ferritic	180	10		
	16		Pearlitic (Martensitic)	260	26		
	17	Nodular cast iron	Ferritic	160	3	○	○
	18		Pearlitic	250	25	○	○
	19		Ferritic	130			
20	Malleable cast iron	Pearlitic	230	21			
N	21	Aluminum-wrought alloy	Not Curable	60			
	22		Curable Hardened	100			
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75			
	24		≤ 12% Si, Curable Hardened	90			
	25		> 12% Si, Not Curable	130		○	○
	26		Cutting Alloys, PB>1%	110		○	○
	27	Copper and Copper Alloys (Bronze / Brass)	CuZn, CuSnZn (Brass)	90		○	○
	28		CuSn, lead-free copper and electrolytic copper	100			
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.				
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Ni or Co Based Cured	350	38		
	35		Cast	320	34		
	36	Titanium Alloys	Pure Titanium	400 Rm			
	37		Alpha + Beta Alloys Hardened	1050 Rm			
H	38	Hardened steel	Hardened	550	55		
	39		Hardened	630	60		
	40	Chilled Cast Iron	Cast	400	42		
	41	Hardened Cast Iron	Hardened	550	55		

