

FD drill 3xD


General machining



- Type of shank DIN 6535HA
- Coolant exit, axial concentric



Internal coolant



Article	*	Dimensions [mm]						Grade
		d ₁ (m7)	d ₂ (h6)	l ₁	l ₂	l ₃	l ₄	KDG305
1534FD03C-0300	*	3	6	62	20	14	36	●
1534FD03C-0350	*	3.5	6	62	20	14	36	○
1534FD03C-0400	*	4	6	66	24	17	36	●
1534FD03C-0450	*	4.5	6	66	24	17	36	○
1534FD03C-0500	*	5	6	66	28	20	36	●
1534FD03C-0550	*	5.5	6	66	28	20	36	○
1534FD03C-0600	*	6	6	66	28	20	36	●
1534FD03C-0650	*	6.5	8	79	34	24	36	●
1534FD03C-0700	*	7	8	79	34	24	36	●
1534FD03C-0750	*	7.5	8	79	41	29	36	○
1534FD03C-0800	*	8	8	79	41	29	36	●
1534FD03C-0850	*	8.5	10	89	47	35	40	○
1534FD03C-0900	*	9	10	89	47	35	40	●
1534FD03C-0950	*	9.5	10	89	47	35	40	○
1534FD03C-1000	*	10	10	89	47	35	40	●
1534FD03C-1050	*	10.5	12	102	55	40	45	○
1534FD03C-1100	*	11	12	102	55	40	45	●
1534FD03C-1150	*	11.5	12	102	55	40	45	○
1534FD03C-1200	*	12	12	102	55	40	45	●
1534FD03C-1250	*	12.5	14	107	60	43	45	○
1534FD03C-1300	*	13	14	107	60	43	45	●
1534FD03C-1350	*	13.5	14	107	60	43	45	○
1534FD03C-1400	*	14	14	107	60	43	45	●
1534FD03C-1450	*	14.5	16	115	65	45	48	○
1534FD03C-1500	*	15	16	115	65	45	48	●
1534FD03C-1550	*	15.5	16	115	65	45	48	○
1534FD03C-1600	*	16	16	115	65	45	48	●
1534FD03C-1650	*	16.5	18	123	73	51	48	○
1534FD03C-1700	*	17	18	123	73	51	48	●
1534FD03C-1750	*	17.5	18	123	73	51	48	○
1534FD03C-1800	*	18	18	123	73	51	48	●
1534FD03C-1850	*	18.5	20	131	79	55	50	○
1534FD03C-1900	*	19	20	131	79	55	50	●
1534FD03C-1950	*	19.5	20	131	79	55	50	○
1534FD03C-2000	*	20	20	131	79	55	50	●

● Ex stock ○ On demand

* With internal cooling

Application field

P	M	K	N	S	H
✓	✓	✓	✓		

✓ Very suitable


✓ Suitable

FD flat drills

180° solid carbide drills for any application

YOUR BENEFITS

- Particularly well suited for creating spot faces efficiently
- Possible to drill holes in inclined surfaces up to 55° with no pre-milling
- **Reduced burr formation** in drilling applications involved thin components
- **Universal tool** for all materials

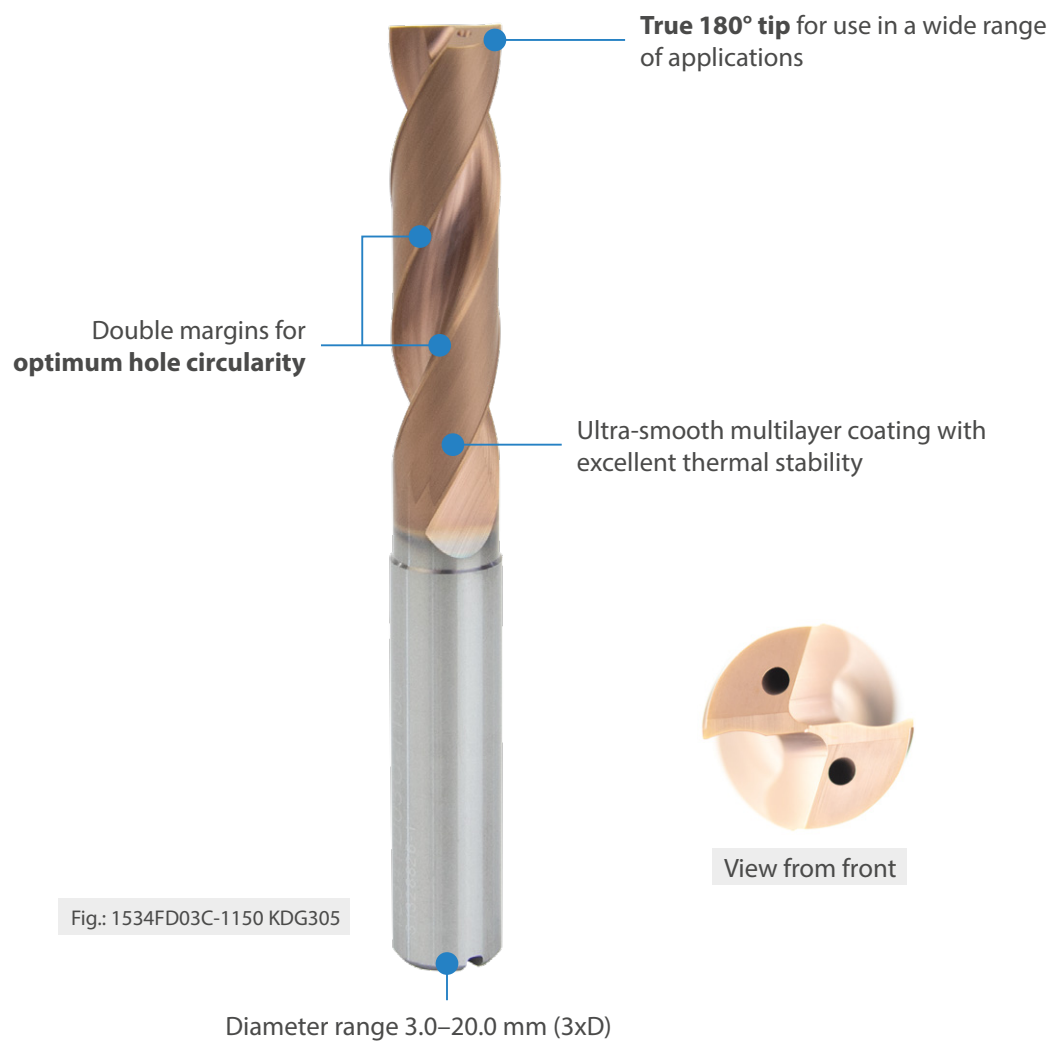

1 5 3 6 SU 05 (C) – 0850 (S)

1

2

3

4

5

6

7

8

9

A

Turning

Type	
Code	Description
1	Forets

1

Shank type	
Code	Description
1	Straight shank
2	Square shank DIN 10
3	Double flattened straight shank DIN 1809
5	Straight shank DIN 6535 HA
6	Weldon shank DIN 6535 HB
7	Whistle Notch shank DIN 6535 HE
9	Morse taper shank

2

B

Milling

Drill type	
Code	Description
0	Twist drill
3	Universal twist drill
4	NC tapping device
5	Step drill
6	Three-lips drill
7	Straight flute drill
8	Deep hole drill

3

Tool length	
Code	Description
1	DIN 338
2	DIN 1897
3	QJ/ZZQ(TO)01.001.002
4	DIN 6537 K
5	DIN 6539
6	DIN 6537 L
7	Factory standard ZCC-C
8	Factory standard ZCC-D
9	Factory standard ZCC-E

4

C

Drilling

Application	
Code	Description
FD	Flat drills with 180° for any application
UD	Twist drills for tough materials
GD	Twist drills for high feeds
SU	Twist drill for general machining
SUK	Twist drill for cast iron
SL	Twist drill for deep hole drilling
SLK	Deep hole drill for cast iron
SP	Pilot drill
SH	Twist drill for hardened materials
SC	Twist drill for non-ferrous metals and cast iron
PA	Three-lips drill for non-ferrous metals and cast iron
PC	Straight flute drill for non-ferrous metals and cast iron

5

D

Technical Information

E

Index

L/D relation		Angle	
Drill		NC tapping device	
Code	Description	Code	Description
03	3xD	90	90°
05	5xD	120	120°
08	8xD		
10	10xD		
12	12xD		
15	15xD		
20	20xD		
30	30xD		

With inner cooling

6

7

Bore diameter [mm]	
Code	Description
0200	2,0
0850	8,5
1800	18,0
...	

Shank diameter [mm]	
Code	Description
S	4,0

8

9

A
Turning

B
Milling

C
Drilling

D
Technical Information

E
Index



a Boring b Drilling c Profile drilling d Centering