




**A**

## End mill long cutting edge Semi-finishing

### 5602R303GM



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Turning

**B**

Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5602R303GM-0300		3	6	7	57	0	0	3	●	○
5602R303GM-0400		4	6	8	57	0	0	3	●	○
5602R303GM-0500		5	6	10	57	0	0	3	●	○
5602R303GM-0600		6	6	10	57	45	0.1	3	●	○
5602R303GM-0800		8	8	16	63	45	0.1	3	●	○
5602R303GM-1000		10	10	19	72	45	0.1	3	●	○
5602R303GM-1200		12	12	22	83	45	0.1	3	●	○
5602R303GM-1400		14	14	22	83	45	0.15	3	●	○
5602R303GM-1600		16	16	26	92	45	0.15	3	●	○
5602R303GM-1800		18	18	26	92	45	0.15	3	●	○
5602R303GM-2000		20	20	32	104	45	0.15	3	●	○

● Ex stock ○ On demand

\* With internal cooling

Milling

**C**

### Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

Drilling

**D**

Technical Information

**E**

Index

System code > B268

Cutting data > B436

Nonstandard order > B477

### End mill – GM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]												
				5501R302GM 5601R302GM 5502R302GM 5602R302GM				GM-2E GM-2EFP GM-2F								
				Slot milling		Shoulder milling		Slot milling		Shoulder milling						
				$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max	$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max					
				$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$					
				$3 \leq x \leq 20$	$0,8 \times D$			$3 \leq x \leq 20$	$0,8 \times D$							
KMG303				KMG303												
$a_e / D$				$a_e / D$												
1/1		1/2		1/10		f-group		1/1		1/2		1/10		f-group		
P Unalloyed steel	approx. 0,15 % C	annealed	125	1	150	200	270	2	150	200	270	2				
	approx. 0,45 % C	annealed	190	2	145	190	260	2	145	190	260	2				
	approx. 0,45 % C	tempered	250	3	105	140	190	2	105	140	190	2				
	approx. 0,75 % C	annealed	270	4	90	120	165	2	90	120	165	2				
	approx. 0,75 % C	tempered	300	5	85	110	150	2	85	110	150	2				
P Low-alloyed steel		annealed	180	6	115	150	205	2	115	150	205	2				
		tempered	275	7	90	120	165	2	90	120	165	2				
		tempered	300	8	85	110	150	2	85	110	150	2				
		tempered	350	9	80	105	145	2	80	105	145	2				
P High-alloyed steel and high-alloyed tool steel		annealed	200	10	105	140	190	2	105	140	190	2				
		hardened and tempered	325	11	80	110	145	2	80	110	145	2				
M Stainless steel	ferritic/martensitic	annealed	200	12	50	65	90	2	50	65	90	2				
	martensitic	tempered	240	13	45	60	80	2	45	60	80	2				
	austenitic	quench hardened	180	14	55	70	95	2	55	70	95	2				
	austenitic-ferritic		230	15	45	60	80	2	45	60	80	2				
K Grey cast iron	perlite/ferritic		180	16	110	150	200	2	110	150	200	2				
	perlite (martensitic)		260	17	90	120	165	2	90	120	165	2				
K Cast iron with spheroidal graphite	ferritic		160	18	135	180	245	2	135	180	245	2				
	perlite		250	19	105	140	190	2	105	140	190	2				
K Malleable cast iron	ferritic		130	20	150	200	270	2	150	200	270	2				
	perlite		230	21	120	160	220	2	120	160	220	2				
N Aluminium wrought alloys	cannot be hardened		60	22												
	hardenable	hardened	100	23												
	$\leq 12\% \text{ Si}$ , cannot be hardened		75	24												
	$\leq 12\% \text{ Si}$ , hardenable	hardened	90	25												
N Cast aluminium alloys	$> 12\% \text{ Si}$ , cannot be hardened		130	26												
	machining steel, PB> 1%		110	27												
	CuZn, CuSnZn		90	28												
S Copper and copper alloys (bronze/brass)	CuSn, Pb-free copper, electrolytic copper		100	29												
	Heat-resistant alloys	Fe-based alloys	annealed	200	30											
		hardened	280	31												
	Ni or Co bass	annealed	250	32												
hardened		350	33													
Titanium alloys	cast	320	34													
	pure titanium		$R_m$ 400	35												
H Hardened steel	$\alpha$ and $\beta$ alloys	hardened	$R_m$ 1050	36												
	hardened and tempered	55 HRC		37												
H Hard cast iron	hardened and tempered	60 HRC		38												
	cast	400		39												
H Hardened cast iron	hardened and tempered	55 HRC		40												
X Non-metallic materials	Thermoplasts			41												
	Thermosetting plastics			42												
	Plastic, glass-fibre reinforced GFRP			43												
	Plastic, carbon fibre reinforced CFRP			44												
	Graphite			45												
	Wood			46												

Note: The given cutting values are guide values, which were determined under ideal conditions.

The values have to be adapted in individual cases.

Feed rate recommendations on page B460.

For examples of material for cutting tool groups view page D22.

Recommended cutting data **Solid carbide milling**

Starting values for cutting speed $v_c$ [m/min]																				
GM-2EL GM-2EX GM-2FL				GM-2EP GM-2ES				GM-3E GM-4E GM-4E-G				GM-2EL GM-4EL-G				5501R303GM 5601R303GM 5502R303GM 5602R303GM				
Slot milling		Shoulder milling		Slot milling		Shoulder milling		Slot milling		Shoulder milling		Slot milling		Shoulder milling		Slot milling		Shoulder milling		
$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max	$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max	$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max	$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max	$\emptyset$ [mm]	$a_p$ max	$\emptyset$ [mm]	$a_e$ max	
$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	
$3 \leq x \leq 20$	$0,8 \times D$			$3 \leq x \leq 20$	$0,8 \times D$			$3 \leq x \leq 20$	$0,8 \times D$			$3 \leq x \leq 20$	$0,8 \times D$			$3 \leq x \leq 20$	$0,8 \times D$			
KMG303				KMG303				KMG303				KMG303				KMG303				
$a_e / D$				$a_e / D$				$a_e / D$				$a_e / D$				$a_e / D$				
1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	
130	170	230	2	150	200	270	2	150	200	270	2	130	170	230	2	140	185	245	2	
125	165	220	2	145	190	260	2	145	190	260	2	125	165	220	2	135	180	235	2	
95	120	165	2	105	140	190	2	105	140	190	2	95	120	165	2	100	130	175	2	
80	105	140	2	90	120	165	2	90	120	165	2	80	105	140	2	85	115	150	2	
75	95	130	2	85	110	150	2	85	110	150	2	75	95	130	2	80	105	135	2	
100	130	175	2	115	150	205	2	115	150	205	2	100	130	175	2	105	140	185	2	
80	105	140	2	90	120	165	2	90	120	165	2	80	105	140	2	85	115	150	2	
75	95	130	2	85	110	150	2	85	110	150	2	75	95	130	2	80	105	135	2	
70	90	120	2	80	105	145	2	80	105	145	2	70	90	120	2	75	100	130	2	
95	120	165	2	105	140	190	2	105	140	190	2	95	120	165	2	100	130	175	2	
70	95	125	2	80	110	145	2	80	110	145	2	70	95	125	2	75	100	130	2	
45	55	75	2	50	65	90	2	50	65	90	2	45	55	75	2	45	60	80	2	
40	50	65	2	45	60	80	2	45	60	80	2	40	50	65	2	40	55	70	2	
45	60	80	2	55	70	95	2	55	70	95	2	45	60	80	2	50	65	85	2	
40	50	65	2	45	60	80	2	45	60	80	2	40	50	65	2	40	55	70	2	
95	125	170	2	110	150	200	2	110	150	200	2	95	125	170	2	105	140	180	2	
80	105	140	2	90	120	165	2	90	120	165	2	80	105	140	2	85	115	150	2	
120	155	210	2	135	180	245	2	135	180	245	2	120	155	210	2	130	170	225	2	
95	120	165	2	105	140	190	2	105	140	190	2	95	120	165	2	100	130	175	2	
130	170	230	2	150	200	270	2	150	200	270	2	130	170	230	2	140	185	245	2	
105	140	185	2	120	160	220	2	120	160	220	2	105	140	185	2	115	150	200	2	

A  
Turning  
B  
Milling  
C  
Drilling  
D  
Technical Information  
E  
Index

## Recommended feed rate

### Solid carbide milling group 1 – Square shoulder mills PM series

	$a_e / D$	Feed rate per cutting edge ( $f_z$ ) [mm]															
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$	
<b>P</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,07	0,08	0,08	0,09	0,09	0,10
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,09	0,10	0,10	0,12	0,12	0,13	
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
<b>M</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,06	0,07	0,07	0,08	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,04	0,04	0,05	0,07	0,08	0,08	0,10	0,10	0,11	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
<b>K</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,07	0,08	0,08	0,09	0,09	0,10	
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,09	0,10	0,10	0,12	0,12	0,13	
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
<b>H</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,06	0,07	0,07	0,08	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,04	0,04	0,05	0,07	0,08	0,08	0,10	0,10	0,11	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 2 – Square shoulder mills GM series

	$a_e / D$	Feed rate per cutting edge ( $f_z$ ) [mm]															
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$	
<b>P</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18	
<b>M</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,06	0,06	0,06	0,06	0,07	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/10	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,10	0,11	0,11	0,13	0,13	0,15	
<b>K</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 3 – Square shoulder mills HM series

	$a_e / D$	Feed rate per cutting edge ( $f_z$ ) [mm]															
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$	
<b>H</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,05	0,06	0,06	0,06	0,06	0,07	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/10	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,10	0,11	0,11	0,13	0,13	0,15	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 4 – Square shoulder mills AL/NM series

	$a_e / D$	Feed rate per cutting edge ( $f_z$ ) [mm]															
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$	
<b>N</b>	1/1	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,09	0,11	0,11	0,12	0,12	0,14	
	3/4	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18	
	1/10	0,03	0,06	0,06	0,06	0,06	0,06	0,09	0,09	0,12	0,19	0,22	0,22	0,25	0,25	0,28	
	1/20	0,04	0,08	0,08	0,08	0,08	0,08	0,12	0,12	0,16	0,23	0,27	0,27	0,31	0,31	0,35	


Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

# GM series

*For general applications*

- For machining of steel to max. 50 HRC and cast iron to heat-resistant alloys.
- Sharp cutting edge with high edge stability. Roughing to finishing with long tool life.
- End mills, ball nose cutters, torus mills, rippers and mini cutters.
- Diameter range 0.3–20.0 mm

Application fields for machining of steel

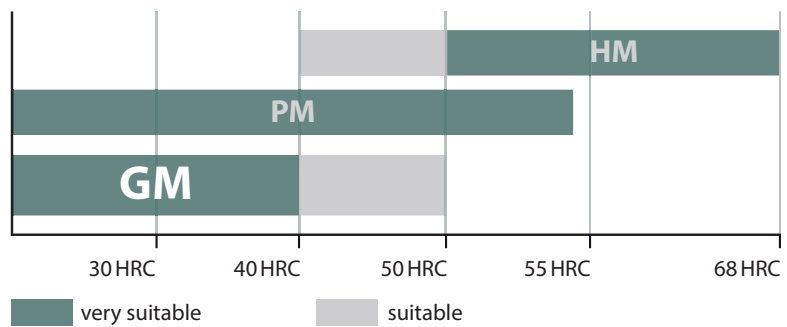

# Solid carbide milling System code – DIN-ISO series

**5 5 0 1 R 30 2 GM R05 0800**

**1 2 3 4 5 6 7 8 9 10**

**A**

Turning

Type	
Code	Description
5	Milling cutter

Shank type	
Code	Description
1	Shank
5	DIN 6535 HA
6	Weldon shank DIN 6535 HB
7	Whistle Notch DIN 6535 HE
9	Morse taper shank

**B**

**1**

**2**

Milling

Cutting edge type	
Code	Description
0	Square shoulder mill
6	Ball nose cutter
8	Torus mill

Tool length	
Code	Description
1	DIN 6527 K
2	DIN 6527 L
5	Factory standard ZCC-A
6	Factory standard ZCC-B
8	DIN 6528
9	Factory standard ZCC-D

**3**

**4**

**C**

Drilling

Rotation direction	
Code	Description
R	Right
L	Left

Helix angle	
Code	Description
20	20°
30	30°
3841	38°/41°
45	45°
55	55°
60	60°

Number of teeth	
Code	Description
2	2
...	
M	Indicated when different diameters have a different number of teeth

**5**

**6**

**7**

**D**

Technical Information

Application	
Code	Description
GM	Semi-finishing
GF	Finishing
HM	Hard machining
MHH	High-speed hard machining
NH	High-performance machining of heat-resistant alloys

Radius [mm]	
Code	Description
R03	0,3
R15	1,5
R30	3,0
...	

Diameter [mm]	
Code	Description
0100	1,0
0800	8,0
2000	20,0
...	


**8**

**9**

**10**

**E**

Index



a Groove milling  
g Plunge milling  
b Square shoulder milling  
h Circular milling/Ramping  
c Profile milling  
d Slot milling  
e Face milling  
f Chamfer milling

**A**

Turning

## Coated cemented carbide PVD

Grade	Grade description
<b>KMD401</b>	PVD coated carbide substrate for high performance milling application of non-ferrous metals, CFRP and GFRP and organic materials. The DLC layer has very good wear protection and high thermal stability.

**B**

Milling

<b>KMG303</b>	PVD coated carbide substrate for universal milling application of steel (up to HRC<=48), stainless steel and cast iron.
---------------	---

<b>KMG405</b>	PVD coated carbide substrate for high performance milling application of steel (up to HRC <55), stainless steel, super alloy material and cast iron. High wear resistance and toughness for a wide application field.
---------------	---

**C**

Drilling

<b>KMG555</b>	PVD coated carbide substrate for hard milling application of steel (HRC 55–68), highest wear resistance and toughness for best cutting result.
---------------	--

<b>KMG309</b>	PVD coated carbide substrate for non ferrous materials. High wear resistance even in abrasive materials.
---------------	--

**D**

Technical Information

## Uncoated cemented carbide

Grade	Grade description
<b>YK30F</b>	Uncoated K30 carbide substrate for steel, stainless steel, cast iron and non ferrous materials.

**E**

Index

<b>YK40F</b>	Uncoated K20–K30/N20–N30 carbide substrate for cast iron and non ferrous materials.
--------------	---

## General machining

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
5501R302GM		2	3.0-20.0	✓	✓	✓				End mills	B272
5601R302GM		2	3.0-20.0	✓	✓	✓				End mills	B273
5502R302GM		2	1.0-20.0	✓	✓	✓				End mills	B274
5602R302GM		2	2.0-20.0	✓	✓	✓				End mills	B275
GM-2E		2	1.0-20.0	✓	✓	✓				End mills	B276
GM-2EL		2	3.0-20.0	✓	✓	✓				End mills	B277
GM-2EX		2	3.0-20.0	✓	✓	✓				End mills	B278
GM-2EFP		2	6.0-16.0	✓	✓	✓				End mills	B279
GM-2F		2	1.0-20.0	✓	✓	✓				End mills	B280
GM-2FL		2	3.0-20.0	✓	✓	✓				End mills	B281
GM-2EP		2	0.5-5.0	✓	✓	✓				Mini end mills	B282
GM-2ES		2	0.3-3.0	✓	✓	✓				Mini end mills	B284
GM-3E		3	1.0-20.0	✓	✓	✓				End mills	B285
GM-3EL		3	3.0-20.0	✓	✓	✓				End mills	B286
5501R303GM		3	3.0-20.0	✓	✓	✓				End mills	B287
5601R303GM		3	3.0-20.0	✓	✓	✓				End mills	B288
5502R303GM		3	3.0-20.0	✓	✓	✓				End mills	B289
5602R303GM		3	3.0-20.0	✓	✓	✓				End mills	B290
5502R453GM		3	3.0-20.0	✓	✓	✓				End mills	B291
5602R453GM		3	3.0-20.0	✓	✓	✓				End mills	B292
GM-4E-G		4	1.0-20.0	✓	✓	✓				End mills	B298

✓ Very suitable    ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical  
Information

E

Index