




A

End mill long cutting edge Finishing

5602R304GF



- Type of shank: DIN 6535HB
- Centre cutting
- Helix angle 30°



Turning

B

Article	*	Dimensions [mm]						Teeth	Grade	
		D	d (h6)	H	L	KCH	CHW		KMG303	YK30F
5602R304GF-0300		3	6	8	57	0	0	4	●	○
5602R304GF-0400		4	6	11	57	0	0	4	●	○
5602R304GF-0500		5	6	13	57	0	0	4	●	○
5602R304GF-0600		6	6	13	57	45	0.1	4	●	○
5602R304GF-0800		8	8	19	63	45	0.1	4	●	○
5602R304GF-1000		10	10	22	72	45	0.1	4	●	○
5602R304GF-1200		12	12	26	83	45	0.1	4	●	○
5602R304GF-1400		14	14	26	83	45	0.15	4	●	○
5602R304GF-1600		16	16	32	92	45	0.15	4	●	○
5602R304GF-1800		18	18	32	92	45	0.15	4	●	○
5602R304GF-2000		20	20	38	104	45	0.15	4	●	○

● Ex stock ○ On demand

* With internal cooling

Milling

C

Application field

P	M	K	N	S	H
✓	✓	✓			

- ✓ Very suitable
- ✓ Suitable

Drilling

D

Technical Information

E

Index

System code > B268

Cutting data > B436

Nonstandard order > B477

Recommended feed rate

Solid carbide milling group 1 – Square shoulder mills PM series

	a_e / D	Feed rate per cutting edge (f_z) [mm]															
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$	
P	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,07	0,08	0,08	0,09	0,09	0,10
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,09	0,10	0,10	0,12	0,12	0,13	
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
M	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,06	0,07	0,07	0,08	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,04	0,04	0,05	0,07	0,08	0,08	0,10	0,10	0,11	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
K	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,07	0,08	0,08	0,09	0,09	0,10	
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,09	0,10	0,10	0,12	0,12	0,13	
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
H	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,06	0,07	0,07	0,08	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,04	0,04	0,05	0,07	0,08	0,08	0,10	0,10	0,11	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Solid carbide milling group 2 – Square shoulder mills GM series

	a_e / D	Feed rate per cutting edge (f_z) [mm]															
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$	
P	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18	
M	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,06	0,06	0,06	0,06	0,07	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/10	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,10	0,11	0,11	0,13	0,13	0,15	
K	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12	
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18	

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Solid carbide milling group 3 – Square shoulder mills HM series

	a_e / D	Feed rate per cutting edge (f_z) [mm]															
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$	
H	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,05	0,06	0,06	0,06	0,06	0,07	
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09	
	1/10	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,10	0,11	0,11	0,13	0,13	0,15	

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Solid carbide milling group 4 – Square shoulder mills AL/NM series

	a_e / D	Feed rate per cutting edge (f_z) [mm]															
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$	
N	1/1	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,09	0,11	0,11	0,12	0,12	0,14	
	3/4	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18	
	1/10	0,03	0,06	0,06	0,06	0,06	0,06	0,09	0,09	0,12	0,19	0,22	0,22	0,25	0,25	0,28	
	1/20	0,04	0,08	0,08	0,08	0,08	0,08	0,12	0,12	0,16	0,23	0,27	0,27	0,31	0,31	0,35	


Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

GM series

For general applications

- For machining of steel to max. 50 HRC and cast iron to heat-resistant alloys.
- Sharp cutting edge with high edge stability. Roughing to finishing with long tool life.
- End mills, ball nose cutters, torus mills, rippers and mini cutters.
- Diameter range 0.3–20.0 mm

Application fields for machining of steel

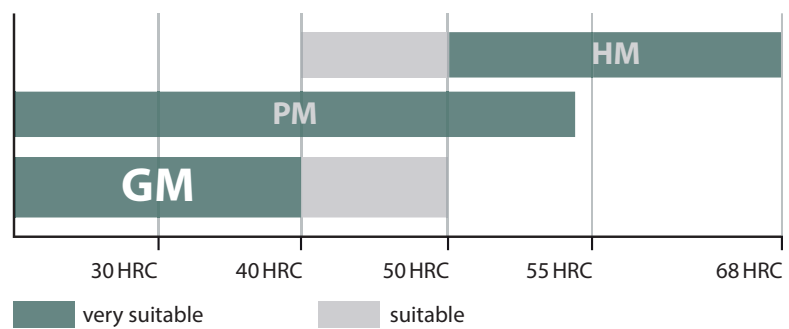

Solid carbide milling System code – DIN-ISO series

5 5 0 1 R 30 2 GM R05 0800

1 2 3 4 5 6 7 8 9 10

A

Turning

Type	
Code	Description
5	Milling cutter

Shank type	
Code	Description
1	Shank
5	DIN 6535 HA
6	Weldon shank DIN 6535 HB
7	Whistle Notch DIN 6535 HE
9	Morse taper shank

B

1

2

Milling

Cutting edge type	
Code	Description
0	Square shoulder mill
6	Ball nose cutter
8	Torus mill

Tool length	
Code	Description
1	DIN 6527 K
2	DIN 6527 L
5	Factory standard ZCC-A
6	Factory standard ZCC-B
8	DIN 6528
9	Factory standard ZCC-D

3

4

C

Drilling

Rotation direction	
Code	Description
R	Right
L	Left

Helix angle	
Code	Description
20	20°
30	30°
3841	38°/41°
45	45°
55	55°
60	60°

Number of teeth	
Code	Description
2	2
...	
M	Indicated when different diameters have a different number of teeth

5

6

7

D

Technical Information

Application	
Code	Description
GM	Semi-finishing
GF	Finishing
HM	Hard machining
MHH	High-speed hard machining
NH	High-performance machining of heat-resistant alloys

Radius [mm]	
Code	Description
R03	0,3
R15	1,5
R30	3,0
...	

Diameter [mm]	
Code	Description
0100	1,0
0800	8,0
2000	20,0
...	


8

9

10

E

Index



a Groove milling
g Plunge milling
b Square shoulder milling
h Circular milling/Ramping
c Profile milling
d Slot milling
e Face milling
f Chamfer milling

A

Turning

Coated cemented carbide PVD

Grade	Grade description
KMD401	PVD coated carbide substrate for high performance milling application of non-ferrous metals, CFRP and GFRP and organic materials. The DLC layer has very good wear protection and high thermal stability.

B

Milling

KMG303	PVD coated carbide substrate for universal milling application of steel (up to HRC<=48), stainless steel and cast iron.
---------------	---

KMG405	PVD coated carbide substrate for high performance milling application of steel (up to HRC <55), stainless steel, super alloy material and cast iron. High wear resistance and toughness for a wide application field.
---------------	---

C

Drilling

KMG555	PVD coated carbide substrate for hard milling application of steel (HRC 55–68), highest wear resistance and toughness for best cutting result.
---------------	--

KMG309	PVD coated carbide substrate for non ferrous materials. High wear resistance even in abrasive materials.
---------------	--

D

Technical Information

Uncoated cemented carbide

Grade	Grade description
YK30F	Uncoated K30 carbide substrate for steel, stainless steel, cast iron and non ferrous materials.

E

Index

YK40F	Uncoated K20–K30/N20–N30 carbide substrate for cast iron and non ferrous materials.
--------------	---

General machining

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
GM-4F-G		4	1.0-20.0	✓	✓	✓				End mills	B293
GM-4EL-G		4	3.0-20.0	✓	✓	✓				End mills	B294
GM-4FL-G		4	3.0-16.0	✓	✓	✓				End mills	B295
GM-4EX-G		4	3.0-20.0	✓	✓	✓				End mills	B296
GM-4E		4	1.0-20.0	✓	✓	✓				End mills	B297
GM-4EL		4	3.0-20.0	✓	✓	✓				End mills	B299
GM-4EFP		4	6.0-20.0	✓	✓	✓				End mills	B300
5501R304GF		4	3.0-20.0	✓	✓	✓				End mills	B301
5601R304GF		4	3.0-20.0	✓	✓	✓				End mills	B302
5502R304GF		4	3.0-20.0	✓	✓	✓				End mills	B303
5602R304GF		4	3.0-20.0	✓	✓	✓				End mills	B304
5508R454GM		4	3.0-20.0	✓	✓	✓				End mills	B305
5602R454GM		4	3.0-20.0	✓	✓	✓				End mills	B306
5589R45MGF		6-10	6.0-20.0	✓	✓	✓				End mills	B307
GM-6E		6	6.0-20.0	✓	✓	✓				End mills	B308
GM-6EL		6	6.0-20.0	✓	✓	✓				End mills	B309
5565R302GF		2	3.0-20.0	✓	✓	✓				Ball nose cutters	B310
5665R202GM		2	3.0-20.0	✓	✓	✓				Ball nose cutters	B311
5566R302GF		2	3.0-12.0	✓	✓	✓				Ball nose cutters	B312
GM-2B		2	1.0-20.0	✓	✓	✓				Ball nose cutters	B313
GM-2BL		2	2.0-20.0	✓	✓	✓				Ball nose cutters	B314

✓ Very suitable ✓ Suitable

A Turning
B Milling
C Drilling
D Technical Information
E Index