



**Ball nose cutter** **Semi-finishing**

**GM-2BP**



- Factory standard
- Centre cutting
- Helix angle 35°



Article	*	Dimensions [mm]							Teeth	Grade KMG303
		R	D	d (h6)	d <sub>1</sub>	H	M	L		
GM-2BP-R0.25-M04		0.25	0.5	4	0.45	0.7	4	50	2	●
GM-2BP-R0.25-M06		0.25	0.5	4	0.45	0.7	6	50	2	●
GM-2BP-R0.3-M04		0.3	0.6	4	0.55	0.9	4	50	2	●
GM-2BP-R0.3-M06		0.3	0.6	4	0.55	0.9	6	50	2	●
GM-2BP-R0.3-M08		0.3	0.6	4	0.55	0.9	8	50	2	●
GM-2BP-R0.4-M04		0.4	0.8	4	0.75	1.2	4	50	2	●
GM-2BP-R0.4-M06		0.4	0.8	4	0.75	1.2	6	50	2	●
GM-2BP-R0.4-M08		0.4	0.8	4	0.75	1.2	8	50	2	●
GM-2BP-R0.4-M10		0.4	0.8	4	0.75	1.2	10	50	2	●
GM-2BP-R0.5-M04		0.5	1	4	0.95	1.5	4	50	2	●
GM-2BP-R0.5-M06		0.5	1	4	0.95	1.5	6	50	2	●
GM-2BP-R0.5-M08		0.5	1	4	0.95	1.5	8	50	2	●
GM-2BP-R0.5-M10		0.5	1	4	0.95	1.5	10	50	2	●
GM-2BP-R0.5-M12		0.5	1	4	0.95	1.5	12	50	2	●
GM-2BP-R0.6-M06		0.6	1.2	4	1.15	1.8	6	50	2	●
GM-2BP-R0.6-M08		0.6	1.2	4	1.15	1.8	8	50	2	●
GM-2BP-R0.6-M12		0.6	1.2	4	1.15	1.8	12	50	2	●
GM-2BP-R0.6-M16		0.6	1.2	4	1.15	1.8	16	50	2	●
GM-2BP-R0.75-M08		0.75	1.5	4	1.45	2.3	8	50	2	●
GM-2BP-R0.75-M12		0.75	1.5	4	1.45	2.3	12	50	2	●
GM-2BP-R0.75-M16		0.75	1.5	4	1.45	2.3	16	50	2	●
GM-2BP-R1.0-M06		1	2	4	1.95	3	6	50	2	●
GM-2BP-R1.0-M08		1	2	4	1.95	3	8	50	2	●
GM-2BP-R1.0-M10		1	2	4	1.95	3	10	50	2	●
GM-2BP-R1.0-M12		1	2	4	1.95	3	12	50	2	●
GM-2BP-R1.0-M16		1	2	4	1.95	3	16	50	2	●
GM-2BP-R1.0-M20		1	2	4	1.95	3	20	50	2	●
GM-2BP-R1.25-M08		1.25	2.5	4	2.4	3.7	8	50	2	●
GM-2BP-R1.25-M12		1.25	2.5	4	2.4	3.7	12	50	2	●
GM-2BP-R1.25-M16		1.25	2.5	4	2.4	3.7	16	60	2	●
GM-2BP-R1.25-M20		1.25	2.5	4	2.4	3.7	20	60	2	●
GM-2BP-R1.5-M08		1.5	3	6	2.85	4.5	8	50	2	●
GM-2BP-R1.5-M10		1.5	3	6	2.85	4.5	10	50	2	●
GM-2BP-R1.5-M12		1.5	3	6	2.85	4.5	12	50	2	●
GM-2BP-R1.5-M16		1.5	3	6	2.85	4.5	16	60	2	●
GM-2BP-R1.5-M20		1.5	3	6	2.85	4.5	20	60	2	●
GM-2BP-R2.0-M10		2	4	6	3.85	6	10	60	2	●

● Ex stock ○ On demand

\* With internal cooling

Application field					
P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable


System code > B268    Cutting data > B436    Nonstandard order > B477





A

## Ball nose cutter Semi-finishing

**GM-2BP**



- Factory standard
- Centre cutting
- Helix angle 35°



Turning

B

Article	*	Dimensions [mm]							Teeth	Grade
		R	D	d (h6)	d <sub>1</sub>	H	M	L		KMG303
GM-2BP-R2.0-M16		2	4	6	3.85	6	16	60	2	●
GM-2BP-R2.0-M20		2	4	6	3.85	6	20	60	2	●
GM-2BP-R2.0-M25		2	4	6	3.85	6	25	60	2	●
GM-2BP-R2.5-M16		2.5	5	6	4.85	7.5	16	60	2	●
GM-2BP-R2.5-M25		2.5	5	6	4.85	7.5	25	70	2	●

● Ex stock ○ On demand

\* With internal cooling

Milling

C

### Application field

P	M	K	N	S	H
✓	✓	✓			

✓ Very suitable

✓ Suitable

Drilling

D

Technical Information

E

Index

System code > B268

Cutting data > B436

Nonstandard order > B477





## Recommended feed rate

### Solid carbide milling group 5 – Ball nose cutters GM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
<b>P</b>	1/1																
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
	1/20	0,03	0,06	0,06	0,06	0,06	0,06	0,08	0,08	0,11	0,17	0,20	0,20	0,23	0,23	0,25	
<b>M</b>	1/1																
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
	1/20	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,21	
<b>K</b>	1/1																
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
	1/20	0,03	0,06	0,06	0,06	0,06	0,06	0,08	0,08	0,11	0,17	0,20	0,20	0,23	0,23	0,25	
<b>H</b>	1/1																
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
	1/20	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,21	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 6 – High feed mills PM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]							
		Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	
<b>P</b>	1/1								
	1/10								
	1/20	0,15	0,25	0,28	0,33	0,44	0,55	0,66	
<b>M</b>	1/1								
	1/10								
	1/20	0,12	0,22	0,25	0,30	0,41	0,52	0,63	
<b>K</b>	1/1								
	1/10								
	1/20	0,15	0,25	0,28	0,33	0,44	0,55	0,66	
<b>H</b>	1/1								
	1/10								
	1/20	0,12	0,22	0,25	0,30	0,41	0,52	0,63	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 7 – Ball nose cutters HM series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
<b>H</b>	1/1																
	1/2	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,21	

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 8 – High feed mills AL series

	a <sub>e</sub> / D	Feed rate per cutting edge (f <sub>z</sub> ) [mm]							
		Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20
<b>N</b>	1/1	0,04	0,05	0,08	0,09	0,11	0,13	0,16	0,18
	3/4	0,05	0,07	0,10	0,12	0,14	0,16	0,20	0,23
	1/10	0,08	0,11	0,16	0,19	0,22	0,25	0,31	0,36

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

A

Turning

B

Milling

C

Drilling

D

Technical Information

E


Index

# GM series

*For general applications*

- For machining of steel to max. 50 HRC and cast iron to heat-resistant alloys.
- Sharp cutting edge with high edge stability. Roughing to finishing with long tool life.
- End mills, ball nose cutters, torus mills, rippers and mini cutters.
- Diameter range 0.3–20.0 mm

Application fields for machining of steel

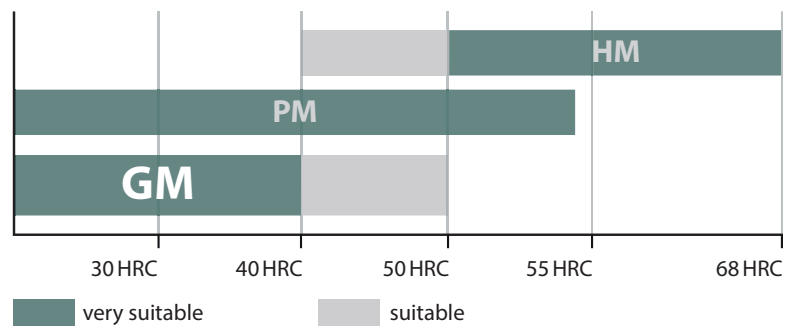

# GM – 2 E L P – D12 R0.5 – M08 – W

**1**      **2**      **3**      **4**      **5**      **6**      **7**      **8**      **9**


Application	
Code	Description
GR	General roughing
GM	Semi-finishing
GF	Finishing
PM	High-performance machining
HM	Hard machining
HH	High-speed hard machining
NM	General machining of non-ferrous metals
AL	General machining of Al and Al alloys
ALP	High-performance machining of Al and Al alloys
ALG	General machining of Al and Al alloys
UM	HSC/HPC machining
VSM	General machining of heat-resistant alloys

**Number of teeth**

Cutting edge type		Cutting edge length	
Code	Description	Code	Description
E	Square shoulder mill with protective chamfer	L	Long
F	Square shoulder mill with sharp cutting edges	X	Extra long
B	Ball nose cutter	F	Short
R	Torus mill		
W	Ripper		
H	High-feed mill		

Type		Diameter [mm]	
Code	Description	Code	Description
S	Mini diameter	D3.0	3,0
P	Ground neck	D8.0	8,0
C	Conical neck	D20.0	20,0
		...	

Radius [mm]		Features		Weldon shank
Code	Description	Code	Description	
R0.5	0,5	G	Spiral angle 30°	
R1.0	1,5	M	Neck length [mm]	
R3.0	3,0	S	Thin shank	
...		AIR	For aerospace industry	

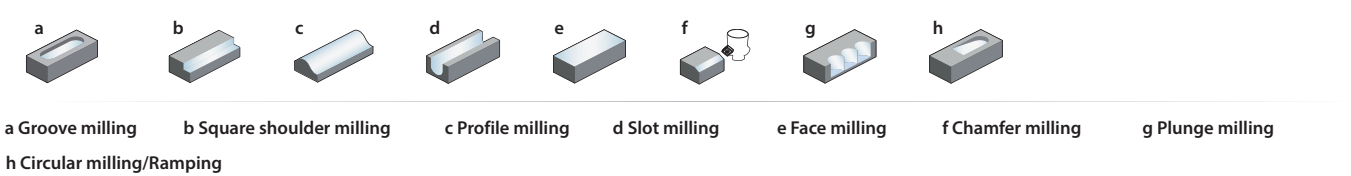

**A**  
Turning  
  
**B**  
Milling  
  
**C**  
Drilling  
  
**D**  
Technical Information  
  
**E**  
Index

**A**

Turning

## Coated cemented carbide PVD

Grade	Grade description
<b>KMD401</b>	PVD coated carbide substrate for high performance milling application of non-ferrous metals, CFRP and GFRP and organic materials. The DLC layer has very good wear protection and high thermal stability.

**B**

Milling

<b>KMG303</b>	PVD coated carbide substrate for universal milling application of steel (up to HRC<=48), stainless steel and cast iron.
---------------	---

<b>KMG405</b>	PVD coated carbide substrate for high performance milling application of steel (up to HRC <55), stainless steel, super alloy material and cast iron. High wear resistance and toughness for a wide application field.
---------------	---

**C**

Drilling

<b>KMG555</b>	PVD coated carbide substrate for hard milling application of steel (HRC 55–68), highest wear resistance and toughness for best cutting result.
---------------	--

<b>KMG309</b>	PVD coated carbide substrate for non ferrous materials. High wear resistance even in abrasive materials.
---------------	--

**D**

Technical Information

## Uncoated cemented carbide

Grade	Grade description
<b>YK30F</b>	Uncoated K30 carbide substrate for steel, stainless steel, cast iron and non ferrous materials.













**E**

Index

<b>YK40F</b>	Uncoated K20–K30/N20–N30 carbide substrate for cast iron and non ferrous materials.
--------------	---



### General machining

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
GM-2BFP		2	1.0-20.0	✓	✓	✓				Ball nose cutters	B315
GM-2BS		2	0.3-3.0	✓	✓	✓				Mini ball nose cutters	B316
GM-2BP		2	0.5-5.0	✓	✓	✓				Mini ball nose cutters	B317
GM-4B		4	3.0-20.0	✓	✓	✓				Ball nose cutters	B319
GM-4BL		4	3.0-20.0	✓	✓	✓				Ball nose cutters	B320
GM-2R		2	1.0-12.0	✓	✓	✓				Torus mills	B321
GM-4R		4	3.0-12.0	✓	✓	✓				Torus mills	B322
GM-4RL		4	6.0-16.0	✓	✓	✓				Torus mills	B323
5602R303GR		3	6.0-8.0	✓	✓	✓				Rippers	B324
5602R304GR		4	10.0-20.0	✓	✓	✓				Rippers	B325
5602R305GR		5	25.0	✓	✓	✓				Rippers	B326
GM-4W		4	6.0-20.0	✓	✓	✓				Rippers	B327

✓ Very suitable    ✓ Suitable

### Machining high hardness steel

HM-2E		2	1.0-20.0						✓	End mills	B354
HM-2EFP		2	6.0-20.0						✓	End mills	B355
HM-2EP		2	0.5-5.0						✓	Mini end mills	B356
HM-2ES		2	0.3-3.0						✓	Mini end mills	B358
HM-4E		4	1.0-20.0						✓	End mills	B359
HM-4EL		4	3.0-20.0						✓	End mills	B360
HM-4EFP		4	6.0-20.0						✓	End mills	B361
5502R55MHH		4-8	3.0-20.0						✓	End mills	B362

✓ Very suitable    ✓ Suitable

**A**

Turning

**B**

Milling

**C**

Drilling

**D**

Technical Information

**E**

Index