
Milling inserts

Ideal machining conditions
Normal machining conditions
Unfavourable machining conditions

SPMT	L	I.C	S	d
06 03	6.35	6.35	3.18	2.8
12 04	12.7	12.7	4.76	5.5

SP** milling insert			HC¹ (CVD)							HC¹ (PVD)									HT	HC²	HW	
		P																				
		M																				
		K																				
		N																				
		S																				
		H																				
ISO		r	YBC302	YBC301	YBC401	YBM253	YBM251	YBM351	YBD152	YBD252	YBG101	YBG102	YBG202	YBG212	YBS203	YBG205	YB9320	YBG302	YBS303	YBG252	YNG151	YNG151C	YD101	YD201
	**SPMT060304-KT**			○																				
	**SPMT060304**	0.4					●											○						
	SPMT120408	0.8	○	●	○		●	○										○						


● Ex stock ○ On demand

HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

Milling inserts

Ideal machining conditions
Normal machining conditions
Unfavourable machining conditions

SDMT	L	I.C	S	d
09 03	9.525	9.525	3.18	4.4

SD** milling insert			HC¹ (CVD)							HC¹ (PVD)									HT	HC²	HW	
		P																				
		M																				
		K																				
		N																				
		S																				
		H																				
ISO		r	YBC302	YBC301	YBC401	YBM253	YBM251	YBM351	YBD152	YBD252	YBG101	YBG102	YBG202	YBG212	YBS203	YBG205	YB9320	YBG302	YBS303	YBG252	YNG151	YNG151C	YD101	YD201
	**SDMT090308**	0.8					●																	

● Ex stock ○ On demand

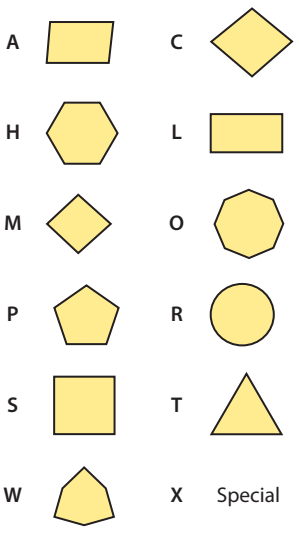
HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

System code B26 Grade selection B24 Technical info B527 Cutting data B230


Indexable milling ISO code – inserts

S	P	K	N	12	04	ED	T21K	R	–	DM
1	2	3	4	5	6	7	8	9		10


1 Insert shape



2 Clearance angle



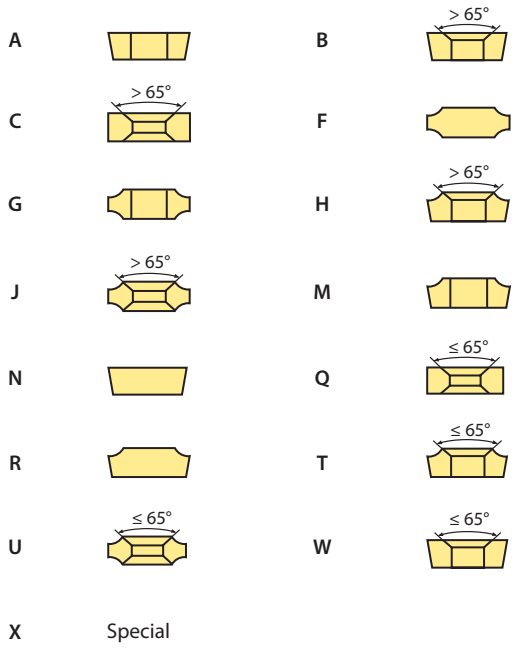
3 Tolerance class



Code	I.C [mm]	m [mm]	S [mm]
A	±0,025	±0,005	±0,025
C	±0,025	±0,013	±0,025
E	±0,025	±0,025	±0,025
F	±0,013	±0,005	±0,025
G	±0,025	±0,025	±0,130
H	±0,013	±0,013	±0,025
J	±0,05–0,13	±0,005	±0,025
K	±0,05–0,13	±0,013	±0,025
L	±0,05–0,13	±0,025	±0,025
M	±0,05–0,13	±0,08–0,18	±0,130
N	±0,05–0,13	±0,08–0,18	±0,025
U	±0,08–0,25	±0,13–0,38	±0,130

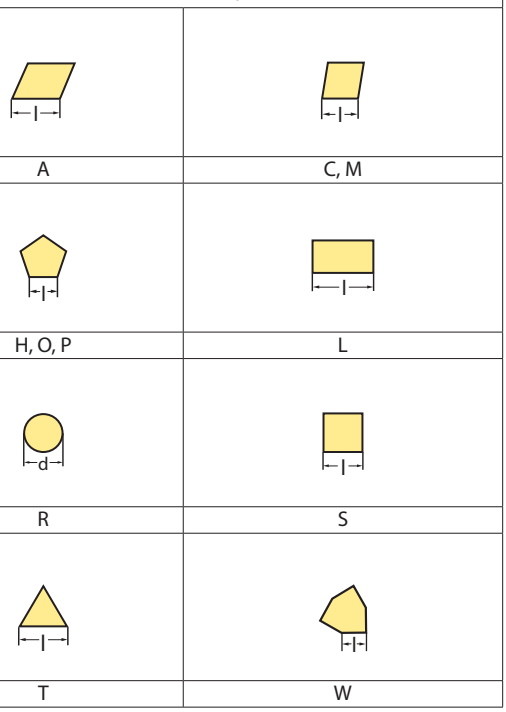
4 Fastening features (metric)

Insert shape



5 Cutting edge length l [mm]

Insert shape




Insert thickness S [mm]



Code	S	Code	S
00	0,79	**05**	5,56
T0	0,99	**T5**	5,95
01	1,59	**06**	6,35
T1	1,98	**T6**	6,75
02	2,38	**07**	7,94
T2	2,58	**09**	9,52
03	3,18	**T9**	9,72
T3	3,97	**11**	11,11
04	4,76	**12**	12,70
T4	4,96		

6

Angle





Code	Kr	Code	αn
A	45°	**A**	3°
D	60°	**B**	5°
E	75°	**C**	7°
F	85°	**D**	15°
P	90°	**E**	20°
Z	Special	**F**	25°
		G	30°
		N	0°
		P	11°
		Z	Special

7

Chamfer

Code	Type	Code	Angle	Code	Width [mm]	Code	Position
F		**0**	5°	**0**	0,10	**K**	
E		**1**	10°	**1**	0,15		
T		**2**	15°	**2**	0,20	**P**	
S		**3**	20°	**3**	0,25		
		4	25°	**4**	0,30	**W**	
		5	30°	**5**	0,35		
				6	0,40		
				7	0,45	**–**	

8

Cutting direction

Code	Description
R	Right
L	Left
N	Right and left

9








Chip breaker overview
(on page B20)

10









Chip breaker overview

	Finishing	Medium machining	Roughing
P	DF	DM	DR
	APF	APM	–
	PF	PM	PR
	GF	GM	GR
	GL	GM	GH
	–	HGR	–
	–	–	ZR
	–	XR	–
	–	MM	–
	MO-2	MO-1	MO-3
M	EF	EM	–
	APF	APM	–
	DF	DM	–
	PF	PM	PR
	GF	GM	GR
	GL	GM	GH
	–	HGR	–
	E	E	–
	–	–	ZR
	–	XR	–
	–	MM	–
K	CF	CM	CR
	DF	DM	DR
	EDFR	DER	DER
	PF	PM	PR
	GF	GM	GR
	GL	GM	GH
	–	–	ZR
	–	XR	–
	MO-2	MO-1	MO-3
S	EF	EM	–
	NM	NM	–
N	LH	LH	LH
	ALH	ALH	ALH


Coated cemented carbide CVD

Grade	ISO	Micro structure	Grade description
YBC302	P20 - P35		CVD coated P20–P35 carbide grade for medium operation to roughing of steel at higher cutting speed. Optimal performance of wear resistance and toughness for a wide application field.
YBC301	P20 - P35		CVD coated P20–P35 carbide grade for medium operation to roughing of steel at lower cutting speed.
YBC401	P30 - P50 M30 - M40		CVD coated P30–P50/M30–M40 carbide grade for roughing operation of steel at lower cutting speed and unstable condition.
YBM251	P20 - P30 M15 - M35		CVD coated P20–P30/M15–M35 carbide grade for medium to roughing operation in stainless steel and steel with wide application field. Good wear resistance and capability against plastic deformation at normal cutting speed.
YBM253	M15 - M35		CVD coated M15–M35 carbide grade for medium to roughing operation in stainless steel with wide application field. High wear resistance and capability against plasctic deformation at higher cutting speed.
YBM351	P25 - P40 M20 - M40		CVD coated P25–P40/M25–M40 carbide grade for roughing operation in stainless steel and steel. Good wear resistance and edge stability at normal cutting speed.
YBD152	K10 - K25		CVD coated K10–K25 carbide substrate. Optimized for medium to roughing operation of cast iron. Good wear resistance and toughness at higher cutting speed.
YBD252	K20 - K35		CVD coated K20–K35 carbide substrate. Optimized for medium to roughing operation of cast iron and Steel. Good wear resistance and toughness at higher cutting speed.



Coated cemented carbide PVD

Grade	ISO	Micro structure	Grade description
YBG101	N05–N20		PVD coated N05–N20 carbide substrate for finishing to semi-finishing in aluminium materials. Coating only on the top face, in combination with the aluminium chip breakers, prevents built-up edges and gives a smooth cut.
YBG102	S05 - S15		PVD coated S05–S15 carbide substrate for finishing to medium application of super alloy material, stainless steel and aluminum. Good wear resistance in a wide application field.
YBG202	P10 - P30 M10-M25		PVD coated P10–P30/M10–M25 carbide substrate for finishing to medium application of stainless steel and steel (milling). Good wear resistance in a wide application field.
YBG212	P25 - P35 M25-M40		PVD coated M25–M40/P25–P35 carbide substrate for steel and stainless steel. Especially for inner insert at drilling operation.
YBS203	S15 – S25		Turning and milling grades for processing heat-resistant materials. A special carbon substrate and the latest PVD coating technology enable a very good wear behaviour, high fracture toughness and high thermal stability.
YBG205	P10 - P30 M20 - M40 S15-S25		PVD multilayer coated P10–P30/M20–M40/S15–S25 carbide substrate for finishing to medium machining of stainless steel, super alloys and steel (milling). Excellent wear resistance and thermal stability in a wide range of applications.
YB9320	P10 - P30 M10-M25		PVD multilayer coated P10–P30/M10–M25 carbide substrate for finishing to medium machining of stainless steel, super alloys and steel (grooving/milling). Optimised coating stability for higher wear resistance and thermal stability in a wide range of applications.
YBG302	P15 - P30 M25 - M40		PVD coated P15–P30/M25–M40 carbide substrate for medium roughing application of stainless steel and steel (milling). Good wear resistance and toughness.



Coated cemented carbide PVD

Grade	ISO	Micro structure	Grade description
YBS303	S25 - S35		Milling grade for machining titanium alloys. A tough carbide substrate and the latest PVD coating technology with increased impact resistance and high thermal stability.

Cermet

Grade	ISO	Micro structure	Grade description
YNG151	P05 - P15		Uncoated P05–P15 cermet grade for fine finishing operation of steel and stainless steel. Good resistance against plastic deformation for good surface finishing.
YNG151C	P05 - P15		PVD coated P05–P15 cermet grade for fine finishing operation of steel and stainless steel. Good wear resistance and capability against plastic deformation for good surface roughness.

Uncoated cemented carbide

Grade	ISO	Micro structure	Grade description
YD101	N05 - N25 K05 - K20		Uncoated K05–K20/N05–N20 carbide substrate for fine to medium application in aluminum and other material.
YD201	K10 - K30 N10 - N30		Uncoated K10–K30/N10–N30 carbide substrate for medium application in aluminum and other material.

Application fields of grades – indexable milling

