
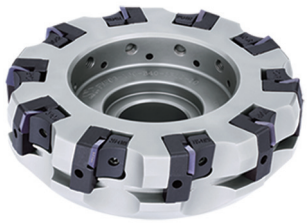

Face milling


FME03 Kr: 75°









A



B



C

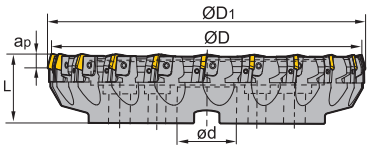

D

Article	✻	Stock R	Stock L	Dimensions [mm] ØD	ØD1	ød	L	ap max	Teeth	Coupling	kg	Inserts
FME03-080-A27-SP12-04		○		80	84	27	50	6	4	A	1.1	SPKN1203 SPKR1203 SPEX1203
FME03-100-B32-SP12-06		●		100	104	32	50	6	6	B	1.9	
FME03-125-B40-SP12-08		○	○	125	129	40	63	6	8	B	3.5	
FME03-160-B40-SP12-10		●	○	160	164	40	63	6	10	B	5.7	
FME03-200-C60-SP12-12		○	○	200	203	60	63	6	12	C	8.2	
FME03-250-C60-SP12-16		○	○	250	253	60	63	6	16	C	13.8	
FME03-315-D60-SP12-20		○		315	318	60	70	6	20	D	23.5	
FME03-080-A27-SP15-04		○	○	80	84	27	50	8	4	A	1	SPKN1504 SPKR1504 SPEX1504
FME03-100-B27-SP15-06		○		100	104	27	50	8	6	B	1.8	
FME03-125-B40-SP15-08		●	○	125	129	40	63	8	8	B	3.3	
FME03-160-B40-SP15-10		○	○	160	164	40	63	8	10	B	5.4	
FME03-200-C60-SP15-12		○	○	200	204	60	63	8	12	C	7.9	
FME03-250-C60-SP15-16		○	○	250	253	60	63	8	16	C	13.6	
FME03-315-D60-SP15-20		○	○	315	318	60	70	8	20	D	23.1	


● Ex stock ○ On demand

✻ With internal cooling

System code B26 Grade selection B24 Technical info B527 Cutting data B230

Spare parts

	Insert	SPKN1203 SPKR1203 SPEX1203	SPKN1203 SPKR1203 SPEX1203	SPKN1504 SPKR1504 SPEX1504
	ØD	80-100	125 - 315	80- 315
	Adjustable screw	LOM5×15.1	LOM5×15.1	LOM5×15.1
	Cassette (left)	LSP12L	LSP12L	LSP15L
	Cassette (right)	LSP12R	LSP12R	LSP15R
	Screw (wedge)	WM8×17	WM8×22	WM8×22
	Wedge (left)	W04L	W04L	W04L
	Wedge (right)	W04R	W04R	W04R
	Wrench (locator)	WT20T	WT20T	WT20T
	Wrench (wedge)	WT25T	WT25T	WT25T

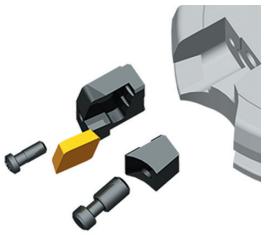


Milling inserts

● Ideal machining conditions
◈ Normal machining conditions
◈ Unfavourable machining conditions

SPKN	L	I.C	S
12 03	12.7	12.7	3.18
15 04	15.875	15.875	4.76

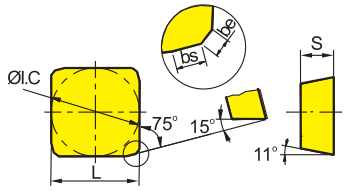SP** milling insert



	HC¹ (CVD)							HC¹ (PVD)								HT	HC²	HW	
P	◈	◈	◈	◈	◈	◈	◈		◈	◈		◈	◈	◈	●	●	●		
M		◈	◈	◈	◈	◈			◈	◈		◈	◈	◈	◈	●	●		
K							◈	◈	●						●				◈
N								◈											◈ ◈
S				◈		◈			●	◈		◈	◈	◈		◈			
H																			

ISO	be	bs	YBC302	YBC301	YBC401	YBM253	YBM251	YBM351	YBD152	YBD252	YBG101	YBG102	YBG202	YBG212	YBS203	YBG205	YB9320	YBG302	YBS303	YBG252	YNG151	YNG151C	YD101	YD201
SPKN1203EDFL	1	1.4																						●
SPKN1203EDFR	1	1.4		○								○												●
SPKN1203EDSKL	1	1.4		●																				
SPKN1203EDSKR	1	1.4		●						○			○					●						
SPKN1203EDTKR	1	1.4							○									○						
SPKN1504EDFL	1	1.4																						○
SPKN1504EDFR	1	1.4																						○
SPKN1504EDS32PR	1	1.4		○										○										
SPKN1504EDSKL	1	1.4																○						
SPKN1504EDSKR	1	1.4		●						●			○					●						
SPKN1504EDTKR	1	1.4											○											

● Ex stock ○ On demand


HC¹ Coated carbide
HT Uncoated cermet
HC² Coated cermet
HW Uncoated carbide

System code B26 Grade selection B24 Technical info B527 Cutting data B230

Milling inserts

Ideal machining conditions
Normal machining conditions
Unfavourable machining conditions

SPKR	L	I.C	S
12 03	12.7	12.7	3.18
15 04	15.875	15.875	4.76

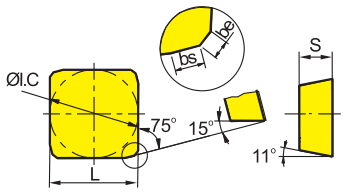

SP** milling insert				HC[1] (CVD)							HC[1] (PVD)									HT	HC[2]	HW	
			P																				
			M																				
			K																				
			N																				
			S																				
			H																				
ISO		be	bs	YBC302	YBC301	YBC401	YBM253	YBM251	YBM351	YBD152	YBD252	YBG101	YBG102	YBG202	YBG212	YBS203	YBG205	YB9320	YBG302	YBS303	YBG252	YNG151	YNG151C	YD101	YD201
	**SPKR1203EDL-GM**	1	1.4					○																	
	SPKR1203EDR-GM	1	1.4					●																	
	SPKR1504EDR-GM	1	1.4				○							○											
	**SPKR1203EDR**	1	1.4		○																				

● Ex stock ○ On demand

HC[1] Coated carbide
HT Uncoated cermet
HC[2] Coated cermet
HW Uncoated carbide

System code B26 Grade selection B24 Technical info B527 Cutting data B230


Indexable milling System code – milling bodies

FM	A	12	050	–	A22	O	–	N	06	–	04	(L)	(C)
1	2	3	4		5	6		7	8		9	10	11

Type	
Code	Description
BM	Profile milling
CM	Chamfer milling
EM	Square shoulder milling
FM	Face milling
HM	Helical milling
SM	Slot milling
TM	T-slot milling
XM	Special

1

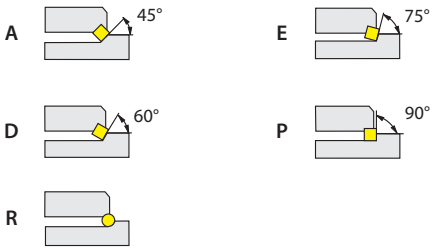Entering angle



2





Serial number

3

Nominal diameter [mm]	
Code	Description
025	25
050	50
160	160
315	315
...	

4

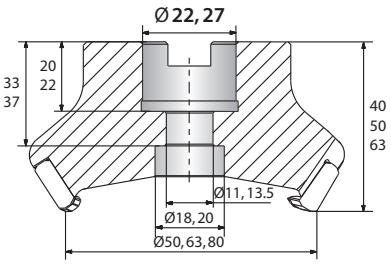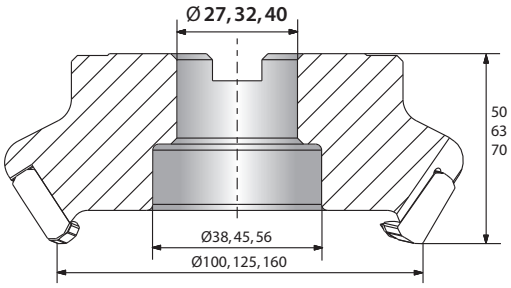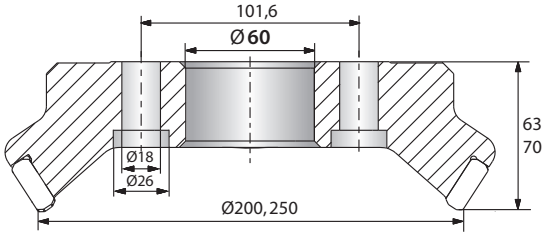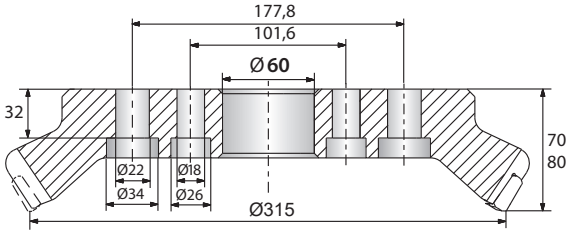Type and size of tool holders

Code	Type	Code	Type
A	Nominal diameter Ø50 – 80 mm 	B	Nominal diameter Ø100 – 160 mm 
C	Nominal diameter Ø200 – 250 mm 	D	Nominal diameter Ø315 mm 
G	Straight shank	XP	Weldon shank
K	Bore with keyway		

5

With respect to mounting please adhere to the information provided by the tool holder manufacturer.

Insert shape			
A		C	
H		L	
M		O	
P		R	
S		T	
W		X	Special
Z	Special		

6

Clearance angle			
B	5°	C	7°
D	15°	E	20°
F	25°	N	0°
P	11°		

7

Cutting edge length l [mm]	
Insert shape	
A	C, M
H, O, P	L
R	S
T	W

8

Number of teeth

9

Cutting direction	
Code	Description
L	Left

10

With inner cooling

11

Tools with B coupling and inner coolant supply require the following spare parts:



Coolant clamp screw



Coolant shower plate



Spare parts (B coupling with inner coolant supply)


		B27	B32	B40	B40
	Ø	**80**	**100**	**125**	**160**
	**Coolant clamp screw**	LDB27C	LDB32C	LDB40C	LDB40C
	**Coolant shower plate**	B27-002-CP	B32-002-CP	B40-002-CP	B40-003-CP

When purchasing tools with inner coolant supply and B coupling these spare parts are included in delivery.


Indexable milling ISO code – inserts

S	P	K	N	12	04	ED	T21K	R	–	DM
1	2	3	4	5	6	7	8	9		10

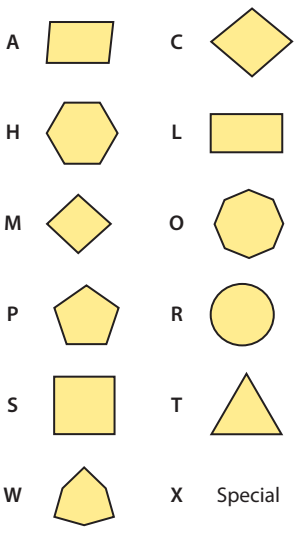
1 Insert shape



2 Clearance angle

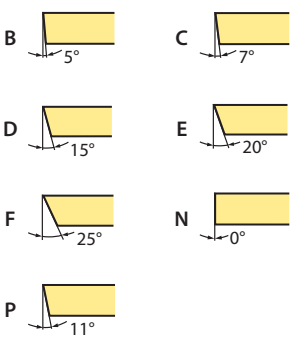


3 Tolerance class



Code	I.C [mm]	m [mm]	S [mm]
A	±0,025	±0,005	±0,025
C	±0,025	±0,013	±0,025
E	±0,025	±0,025	±0,025
F	±0,013	±0,005	±0,025
G	±0,025	±0,025	±0,130
H	±0,013	±0,013	±0,025
J	±0,05–0,13	±0,005	±0,025
K	±0,05–0,13	±0,013	±0,025
L	±0,05–0,13	±0,025	±0,025
M	±0,05–0,13	±0,08–0,18	±0,130
N	±0,05–0,13	±0,08–0,18	±0,025
U	±0,08–0,25	±0,13–0,38	±0,130


4 Fastening features (metric)

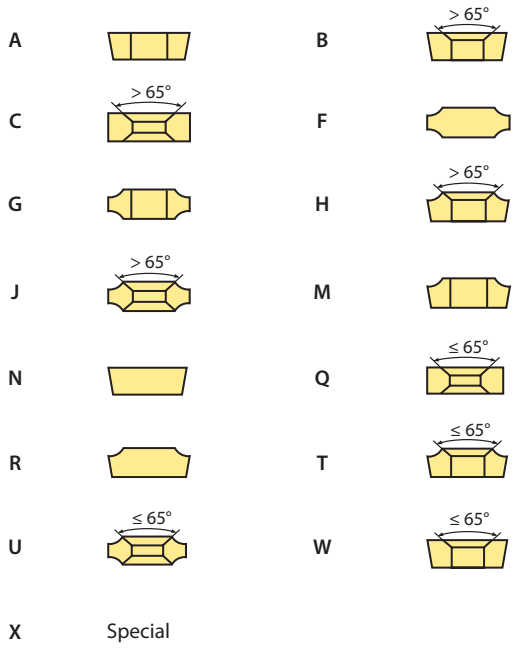Insert shape



5 Cutting edge length l [mm]

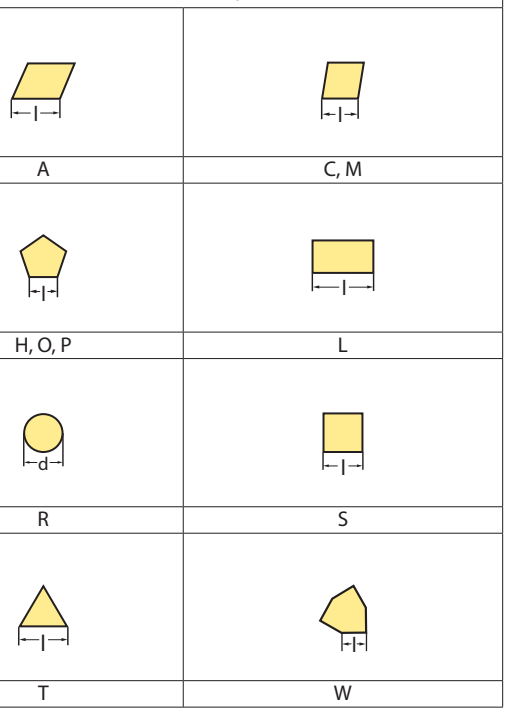Insert shape




Insert thickness S [mm]



Code	S	Code	S
00	0,79	**05**	5,56
T0	0,99	**T5**	5,95
01	1,59	**06**	6,35
T1	1,98	**T6**	6,75
02	2,38	**07**	7,94
T2	2,58	**09**	9,52
03	3,18	**T9**	9,72
T3	3,97	**11**	11,11
04	4,76	**12**	12,70
T4	4,96		

6

Angle





Code	Kr	Code	αn
A	45°	**A**	3°
D	60°	**B**	5°
E	75°	**C**	7°
F	85°	**D**	15°
P	90°	**E**	20°
Z	Special	**F**	25°
		G	30°
		N	0°
		P	11°
		Z	Special

7

Chamfer

Code	Type	Code	Angle	Code	Width [mm]	Code	Position
F		**0**	5°	**0**	0,10	**K**	
E		**1**	10°	**1**	0,15		
T		**2**	15°	**2**	0,20	**P**	
S		**3**	20°	**3**	0,25		
		4	25°	**4**	0,30	**W**	
		5	30°	**5**	0,35		
				6	0,40		
				7	0,45	**–**	

8

Cutting direction

Code	Description
R	Right
L	Left
N	Right and left

9

Chip breaker overview
(on page B20)

10

Guide for recommended cutting data – indexable milling

Indexable milling – group 1 (FMA07/11/12, FMD02, EMP09/13)

Material group		Composition / structure / heat treatment		Brinell hardness HB	Machining group	Starting values for cutting speed v$_c$ [m/min] HC (CVD) YBC302 a_e / D 1/1 | 3/4	YBC302 a_e / D 1/5	YBC401 a_e / D 1/1 | 3/4	YBC401 a_e / D 1/5	YBD152 a_e / D 1/1 | 3/4	YBD152 a_e / D 1/5	YBD252 a_e / D 1/1 | 3/4	YBD252 a_e / D 1/5
P	Unalloyed steel	ca. 0,15 % C	annealed	125	1	260	300	225	260				
		ca. 0,45 % C	annealed	190	2	225	255	195	225				
		ca. 0,45 % C	tempered	250	3	210	240	180	210				
		ca. 0,75 % C	annealed	270	4	185	210	160	185				
		ca. 0,75 % C	tempered	300	5	170	195	150	170				
	Low-alloyed steel		annealed	180	6	225	255	195	225				
			tempered	275	7	185	210	160	185				
			tempered	300	8	170	195	150	170				
			tempered	350	9	145	165	125	145				
	High-alloyed steel and high-alloyed tool steel		annealed	200	10	130	150	115	130				
			hardened and tempered	325	11	95	105	80	95				
M	Stainless steel	ferritic/martensitic	annealed	200	12								
		martensitic	tempered	240	13								
		austenitic	quench hardened	180	14								
		austenitic-ferritic		230	15								
K	Grey cast iron	perlitic/ferritic		180	16					370	430	320	370
		perlitic (martensitic)		260	17					220	255	190	220
	Cast iron with spheroidal graphite	ferritic		160	18					255	295	220	255
		perlitic		250	19					170	200	145	170
	Malleable cast iron	ferritic		130	20					305	355	265	305
		perlitic		230	21					205	240	175	205
N	Aluminium wrought alloys	cannot be hardened		60	22								
		hardenable	hardened	100	23								
	Cast aluminium alloys	≤ 12 % Si, cannot be hardened		75	24								
		≤ 12 % Si, hardenable	hardened	90	25								
		> 12 % Si, cannot be hardened		130	26								
	Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27								
		CuZn, CuSnZn		90	28								
		CuSn, Pb-free copper, electrolytic copper		100	29								
S	Heat-resistant alloys	Fe-based alloys	annealed	200	30								
			hardened	280	31								
		Ni or Co bass	annealed	250	32								
			hardened	350	33								
			cast	320	34								
	Titanium alloys	pure titanium		R_m 400	35								
		α and β alloys	hardened	R_m 1050	36								
H	Hardened steel		hardened and tempered	55 HRC	37								
			hardened and tempered	60 HRC	38								
	Hard cast iron		cast	400	39								
	Hardened cast iron		hardened and tempered	55 HRC	40								
X	Non-metallic materials	Thermoplasts			41								
		Thermosetting plastics			42								
		Plastic, glass-fibre reinforced GFRP			43								
		Plastic, carbon fibre reinforced CFRP			44								
		Graphite			45								
		Wood			46								

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.
Feed rate recommendations on page B248
For examples of material for cutting tool groups view page D22.

Recommend feed rate

Indexable milling – group1 (FMA07/11/12, FMD02, EMP09/13)

5

6

	Material group	Feed rate per cutting edge [mm]																	
		EMP09			EMP13			EMP13			FMA07			FMA07			FMA11		
		LNKT12			ANGX11			ANGX15			ONHU06			ONHU08			SNEG12		
		Application																	
		F	M	R	F	M	R	F	M	R	F	M	R	F	M	R	F	M	R
P	Unalloyed steel		0,25	0,50		0,23			0,25		0,19	0,23		0,19	0,23			0,20	0,23
P	Low-alloyed steel		0,23	0,47		0,22			0,23		0,17	0,22		0,17	0,22			0,19	0,21
P	High-alloyed steel and high-alloyed tool steel		0,22	0,44		0,20			0,22		0,16	0,20		0,16	0,20			0,18	0,20
M	Stainless steel		0,18	0,35														0,14	0,16
K	Grey cast iron		0,28	0,55		0,26			0,28		0,20	0,26		0,20	0,26			0,22	0,25
K	Cast iron with spheroidal graphite		0,25	0,50		0,23			0,25		0,19	0,23		0,19	0,23			0,20	0,23
K	Malleable cast iron		0,25	0,50		0,23			0,25		0,19	0,23		0,19	0,23			0,20	0,23
N	Aluminium wrought alloys					0,20			0,21										
N	Aluminium-Gusslegierungen					0,20			0,21										
N	Copper and copper alloys(bronze/brass)					0,18			0,19										
S	Heat-resistant alloys																		
S	Titanium alloys																		
H	Hardened steel																		
H	Hard cast iron																		
H	Hardened cast iron																		
X	Non-metallic materials																		

1. Select the appropriate product family/cutting data group.
2. Select the used grade.
3. Determine the immersion.
4. Select the used material and read the cutting speed.
5. Please have a look at the detached feed rate recommendations.
6. Select the used tool, the machining mode and the used material.

Indexable milling – group 2 (FMA01/02/03/04, FME01/02, FMP01/02, EMP01/02/03/04)

Material group		Composition / structure / heat treatment		Brinell hardness HB	Machining group	Starting values for cutting speed v_c [m/min]							
						HC (CVD)							
						YBC302		YBC401		YBD152		YBD252	
						a_e / D		a_e / D		a_e / D		a_e / D	
						1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5
P	Unalloyed steel	approx. 0,15 % C	annealed	125	1	245	285	210	245				
		approx. 0,45 % C	annealed	190	2	210	245	180	210				
		approx. 0,45 % C	tempered	250	3	200	230	170	200				
		approx. 0,75 % C	annealed	270	4	175	200	150	175				
		approx. 0,75 % C	tempered	300	5	160	190	140	160				
	Low-alloyed steel		annealed	180	6	210	245	180	210				
			tempered	275	7	175	200	150	175				
			tempered	300	8	160	190	140	160				
			tempered	350	9	135	160	120	135				
	High-alloyed steel and high-alloyed tool steel		annealed	200	10	125	145	105	125				
			hardened and tempered	325	11	90	100	75	90				
M	Stainless steel	ferritic/martensitic	annealed	200	12								
		martensitic	tempered	240	13								
		austenitic	quench hardened	180	14								
		austenitic-ferritic		230	15								
K	Grey cast iron	perlitic/ferritic		180	16					315	365	270	315
		perlitic (martensitic)		260	17					185	215	160	190
	Cast iron with spheroidal graphite	ferritic		160	18					215	250	185	215
		perlitic		250	19					145	170	125	145
	Malleable cast iron	ferritic		130	20					260	300	225	260
		perlitic		230	21					175	205	150	175
N	Aluminium wrought alloys	cannot be hardened		60	22								
		hardenable	hardened	100	23								
	Cast aluminium alloys	≤ 12 % Si, cannot be hardened		75	24								
		≤ 12 % Si, hardenable	hardened	90	25								
		> 12 % Si, cannot be hardened		130	26								
	Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27								
		CuZn, CuSnZn		90	28								
		CuSn, Pb-free copper, electrolytic copper		100	29								
S	Heat-resistant alloys	Fe-based alloys	annealed	200	30								
			hardened	280	31								
		Ni or Co bass	annealed	250	32								
			hardened	350	33								
			cast	320	34								
	Titanium alloys	pure titanium		R_m 400	35								
		α and β alloys	hardened	R_m 1050	36								
H	Hardened steel		hardened and tempered	55 HRC	37								
			hardened and tempered	60 HRC	38								
	Hard cast iron		cast	400	39								
	Hardened cast iron		hardened and tempered	55 HRC	40								
X	Non-metallic materials	Thermoplasts			41								
		Thermosetting plastics			42								
		Plastic, glass-fibre reinforced GFRP			43								
		Plastic, carbon fibre reinforced CFRP			44								
		Graphite			45								
		Wood			46								

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.
Feed rate recommendations on page B254.
For examples of material for cutting tool groups view page D11.


	Starting values for cutting speed v_c [m/min]																					
	HC (CVD)		HC (PVD)														HW				HT	
	YBM253		YBG101		YBG102		YBG152		YB9320		YBG205		YBG252		YBG302		YD101		YD201		YNG151	
	a_e / D		a_e / D		a_e / D		a_e / D		a_e / D		a_e / D		a_e / D		a_e / D		a_e / D		a_e / D		a_e / D	
	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5	1/1 | 3/4	1/5
	245	285			255	295	240	280	230	265	220	255	215	250	210	245					270	315
	210	245			220	255	205	240	200	230	190	220	185	215	180	210					235	270
	200	230			205	240	195	225	185	215	180	205	175	200	170	200					220	255
	175	200			180	210	170	200	165	190	155	180	155	175	150	175					195	220
	160	190			170	195	160	185	150	175	145	170	140	165	140	160					180	210
	210	245			220	255	205	240	200	230	190	220	185	215	180	210					235	270
	175	200			180	210	170	200	165	190	155	180	155	175	150	175					195	220
	160	190			170	195	160	185	150	175	145	170	140	165	140	160					180	210
	135	160			145	165	135	155	130	150	125	145	120	140	120	135					150	180
	125	145			130	150	120	140	115	135	110	130	110	125	105	125					140	160
	90	100			90	105	85	100	85	95	80	90	80	90	75	90					100	110
	125	145			130	150	120	140	115	135	110	130	110	125	105	125					135	160
	105	120			110	125	105	120	100	115	95	110	95	105	90	105					115	135
	130	155			140	160	130	150	125	145	120	140	115	135	115	130					145	170
	105	120			110	125	105	120	100	115	95	110	95	105	90	105					115	135
					285	330	265	305	255	295	245	285	240	280	235	275						
					170	195	160	185	150	175	145	170	140	165	140	160						
					195	225	180	210	175	200	165	195	165	190	160	185						
					130	150	120	140	115	135	110	130	110	125	105	125						
					230	270	220	255	210	240	200	230	195	225	190	225						
					155	180	145	170	140	160	135	155	130	150	130	150						
			1505	1735													1205	1390	1040	1200		
			1225	1420													980	1140	850	980		
			540	620													435	500	375	435		
			435	505													350	405	300	350		
			220	255													180	205	155	180		
			170	195													140	160	120	140		
			210	245													170	200	150	170		
			385	445													310	360	265	310		
					75	85	70	80	65	75	65	75	65	75	60	70						
					50	55	50	55	45	50	45	50	45	50	40	45						
					60	70	55	65	55	65	50	55	50	55	50	55						
					35	40	35	40	30	35	30	35	30	35	30	35						
					45	50	45	50	40	45	40	45	40	45	40	45						
					75	85	70	80	65	75	65	75	65	75	60	70						
					75	85	70	80	65	75	65	75	65	75	60	70						

HC Coated carbide
HT Uncoated carbide, main component (TiC) o. (TiN), cermet
HC_1 Coated cermet
HW Uncoated carbide, main component (WC)

Indexable milling – group 2 (FMA01/02/03/04, FME01/02, FMP01/02, EMP01/02/03/04)

Material group		Composition / structure / heat treatment		Brinell hardness HB	Machining group	Starting values for cutting speed vc [m/min]			
						HC_1			
						YNG151C			
						a_e / D			
						1/1 | 3/4	1/5		
P	Unalloyed steel	approx. 0,15 % C	annealed	125	1	285	335		
		approx. 0,45 % C	annealed	190	2	250	285		
		approx. 0,45 % C	tempered	250	3	235	270		
		approx. 0,75 % C	annealed	270	4	205	235		
		approx. 0,75 % C	tempered	300	5	190	225		
	Low-alloyed steel		annealed	180	6	250	285		
			tempered	275	7	205	235		
			tempered	300	8	190	225		
			tempered	350	9	160	190		
	High-alloyed steel and high-alloyed tool steel		annealed	200	10	150	170		
			hardened and tempered	325	11	105	120		
M	Stainless steel	ferritic/martensitic	annealed	200	12	145	170		
		martensitic	tempered	240	13	120	145		
		austenitic	quench hardened	180	14	155	180		
		austenitic-ferritic		230	15	120	145		
K	Grey cast iron	perlitic/ferritic		180	16				
		perlitic (martensitic)		260	17				
	Cast iron with spheroidal graphite	ferritic		160	18				
		perlitic		250	19				
	Malleable cast iron	ferritic		130	20				
		perlitic		230	21				
N	Aluminium wrought alloys	cannot be hardened		60	22				
		hardenable	hardened	100	23				
	Cast aluminium alloys	≤ 12 % Si, cannot be hardened		75	24				
		≤ 12 % Si, hardenable	hardened	90	25				
		> 12 % Si, cannot be hardened		130	26				
	Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27				
		CuZn, CuSnZn		90	28				
		CuSn, Pb-free copper, electrolytic copper		100	29				
S	Heat-resistant alloys	Fe-based alloys	annealed	200	30				
			hardened	280	31				
		Ni or Co bass	annealed	250	32				
			hardened	350	33				
			cast	320	34				
	Titanium alloys	pure titanium		R_m 400	35				
		α and β alloys	hardened	R_m 1050	36				
H	Hardened steel		hardened and tempered	55 HRC	37				
			hardened and tempered	60 HRC	38				
	Hard cast iron		cast	400	39				
	Hardened cast iron		hardened and tempered	55 HRC	40				
X	Non-metallic materials	Thermoplasts			41				
		Thermosetting plastics			42				
		Plastic, glass-fibre reinforced GFRP			43				
		Plastic, carbon fibre reinforced CFRP			44				
		Graphite			45				
		Wood			46				

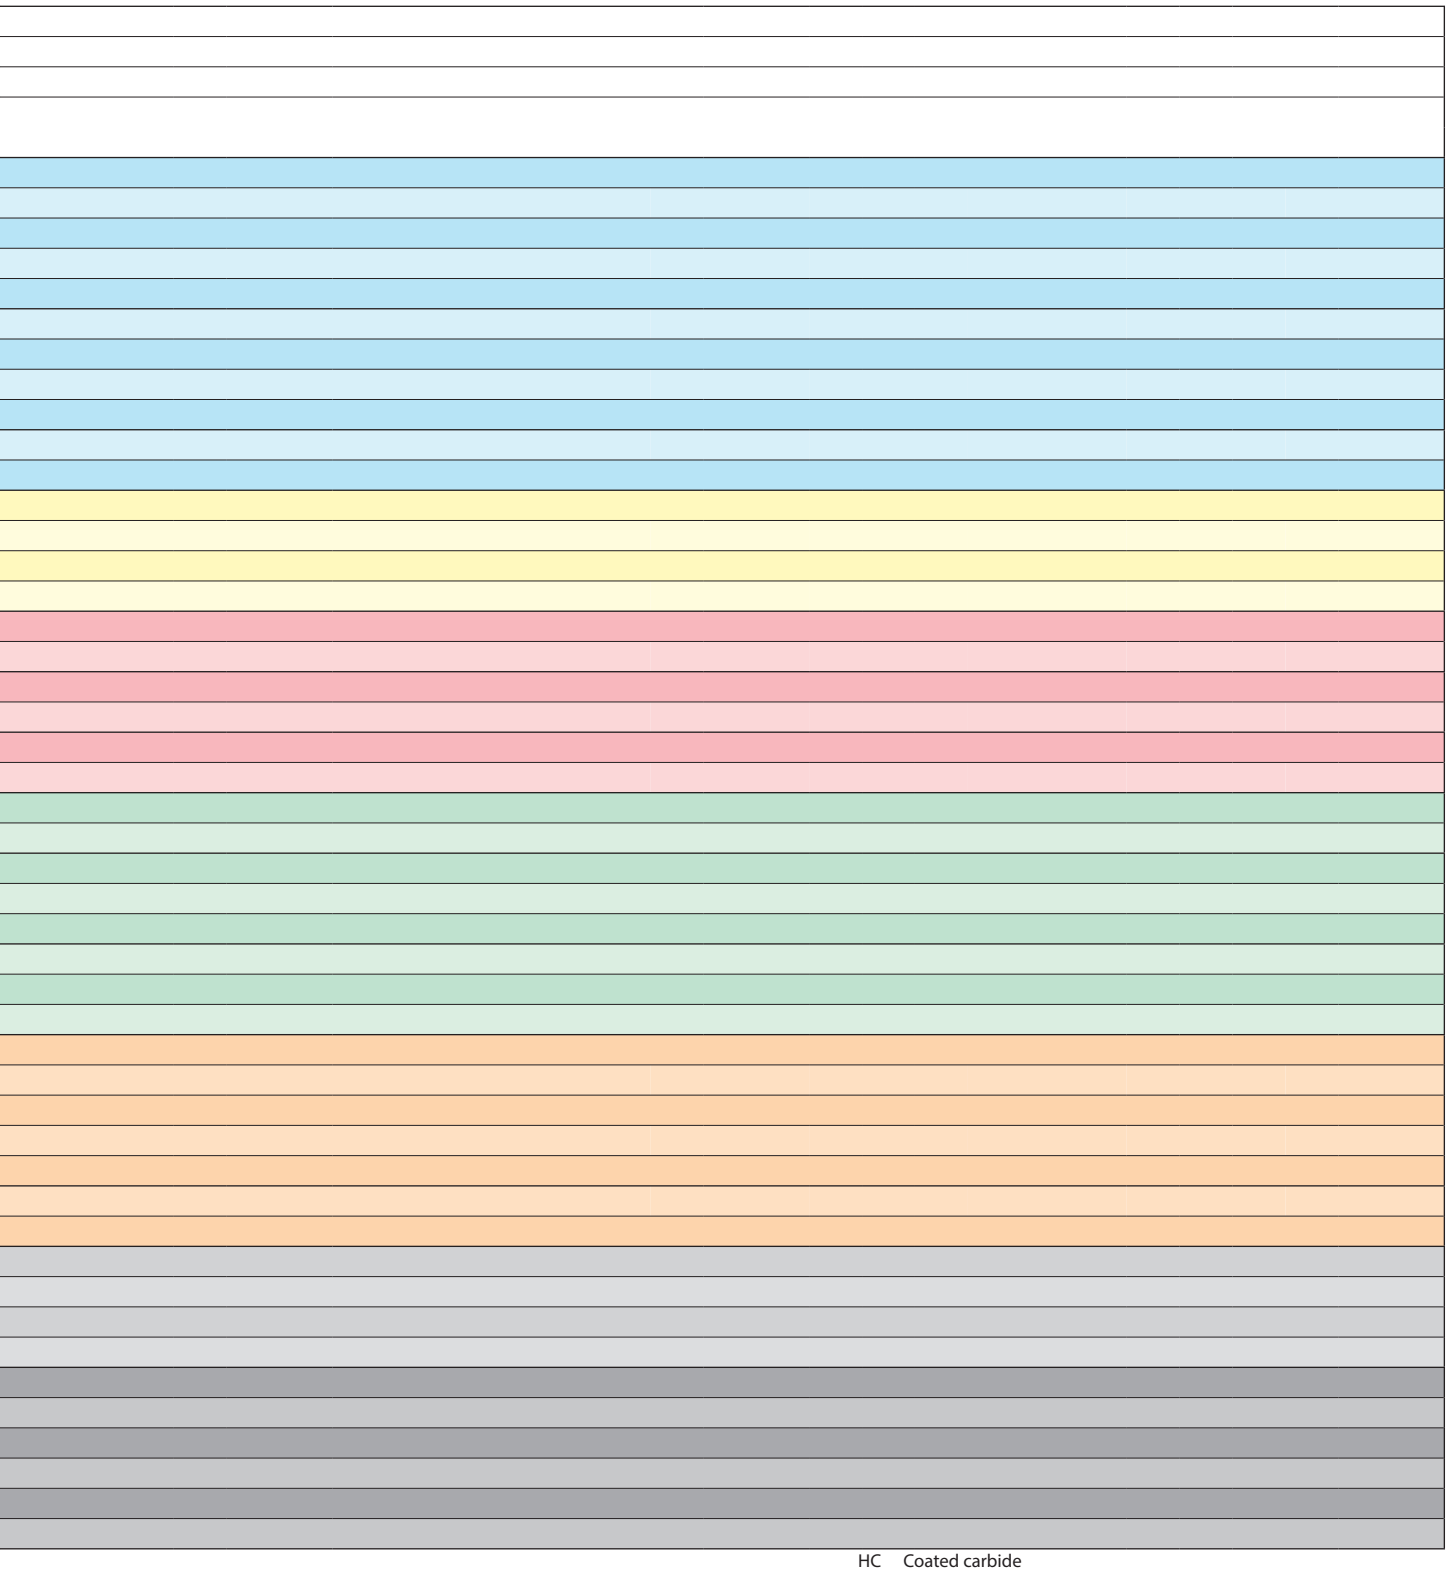Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.
Feed rate recommendations on page B254.
For examples of material for cutting tool groups view page D11.



HC Coated carbide
HT Uncoated carbide, main component (TiC) o. (TiN), cermet
HC_1 Coated cermet
HW Uncoated carbide, main component (WC)

Recommended feed rate

Indexable milling – group 2 (FMA01/02/03/04, FME01/02, FMP01/02, EMP01/02/03/04)

Material group		Feed rate per cutting edge [mm]																	
		FMA01 | FMA02			FMA03			FMA03			FMA04			FMA04			FMA04		
		SEET12			SEKN12			SEKN15			OFKT05			OFKR07			ODHT06		
		Application																	
		F	M	R	F	M	R	F	M	R	F	M	R	F	M	R	F	M	R
P	Unalloyed steel	0,15	0,20	0,25		0,18			0,20		0,20	0,25		0,20	0,25		0,20	0,25	
P	Low-alloyed steel	0,14	0,19	0,23		0,17			0,19		0,19	0,23		0,19	0,23		0,19	0,23	
P	High-alloyed steel and high-alloyed tool steel	0,13	0,18	0,22		0,16			0,18		0,18	0,22		0,18	0,22		0,18	0,22	
M	Stainless steel	0,11	0,14	0,18		0,13			0,14		0,14	0,18		0,14	0,18		0,14	0,18	
K	Grey cast iron	0,17	0,22	0,28		0,20			0,22		0,22	0,28		0,22	0,28		0,22	0,28	
K	Cast iron with spheroidal graphite	0,15	0,20	0,25		0,18			0,20		0,20	0,25		0,20	0,25		0,20	0,25	
K	Malleable cast iron	0,15	0,20	0,25		0,18			0,20		0,20	0,25		0,20	0,25		0,20	0,25	
N	Aluminium wrought alloys	0,13	0,17	0,21							0,17	0,21		0,17	0,21		0,17	0,21	
N	Aluminum cast alloys	0,13	0,17	0,21							0,17	0,21		0,17	0,21		0,17	0,21	
N	Copper and copper alloys (bronze/brass)	0,11	0,15	0,19							0,15	0,19		0,15	0,19		0,15	0,19	
S	Heat-resistant alloys	0,11	0,14	0,18							0,14	0,18		0,14	0,18		0,14	0,18	
S	Titanium alloys	0,11	0,14	0,18							0,14	0,18		0,14	0,18		0,14	0,18	
H	Hardened steel																		
H	Hard cast iron																		
H	Hardened cast iron																		
X	Non-metallic materials																		

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Indexable milling – group 3 (FMR01/02/03/04) Face milling

Material group		Feed rate per cutting edge [mm]																	
		FMR01			FMR01			FMR02			FMR02			FMR02			FMR03		
		RCKT10			RC*12			RC*12			RCKT16			RCKT20			RDKW07		
		Application																	
		F	M	R	F	M	R	F	M	R	F	M	R	F	M	R	F	M	R
P	Unalloyed steel		0,20	0,25		0,20	0,25		0,20	0,25		0,23	0,29		0,26	0,33		0,17	
P	Low-alloyed steel		0,19	0,23		0,19	0,23		0,19	0,23		0,21	0,27		0,25	0,31		0,16	
P	High-alloyed steel and high-alloyed tool steel		0,18	0,22		0,18	0,22		0,18	0,22		0,20	0,25		0,23	0,29		0,15	
M	Stainless steel		0,14	0,18		0,14	0,18		0,14	0,18		0,16	0,20		0,19	0,23		0,12	
K	Grey cast iron		0,22	0,28		0,22	0,28		0,22	0,28		0,25	0,32		0,29	0,36		0,19	
K	Cast iron with spheroidal graphite		0,20	0,25		0,20	0,25		0,20	0,25		0,23	0,29		0,26	0,33		0,17	
K	Malleable cast iron		0,20	0,25		0,20	0,25		0,20	0,25		0,23	0,29		0,26	0,33		0,17	
N	Aluminum wrought alloys					0,17	0,21		0,17	0,21									
N	Aluminum cast alloys					0,17	0,21		0,17	0,21									
N	Copper and copper alloys (bronze/brass)					0,15	0,19		0,15	0,19									
S	Heat-resistant alloys																		
S	Titanium alloys																		
H	Hardened steel																		
H	Hard cast iron																		
H	Hardened cast iron																		
X	Non-metallic materials																		

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

	Feed rate per cutting edge [mm]																							
	FME02			FME03			FME03			FMP01			FMP02			EMP01 | EMP02			EMP01 | EMP02			EMP03 | EMP04		
	SPK*12			SPK*12			SPK*15			TPKN22			SEET12			APKT11			APKT16			APKT11		
	Application																							
	F	M	R	F	M	R	F	M	R	F	M	R	F	M	R	F	M	R	F	M	R	F	M	R
		0,20			0,19			0,20			0,20		0,15	0,20	0,25	0,10	0,15	0,20	0,12	0,17	0,23	0,10	0,20	0,25
		0,19			0,17			0,19			0,19		0,14	0,19	0,23	0,09	0,14	0,19	0,11	0,16	0,21	0,09	0,19	0,23
		0,18			0,16			0,18			0,18		0,13	0,18	0,22	0,09	0,13	0,18	0,10	0,15	0,20	0,09	0,18	0,22
		0,14			0,13			0,14			0,14		0,11	0,14	0,18	0,07	0,11	0,14	0,08	0,12	0,16	0,07	0,14	0,18
		0,22			0,20			0,22			0,22		0,17	0,22	0,28	0,11	0,17	0,22	0,13	0,19	0,25	0,11	0,22	0,28
		0,20			0,19			0,20			0,20		0,15	0,20	0,25	0,10	0,15	0,20	0,12	0,17	0,23	0,10	0,20	0,25
		0,20			0,19			0,20			0,20		0,15	0,20	0,25	0,10	0,15	0,20	0,12	0,17	0,23	0,10	0,20	0,25
													0,13	0,17	0,21	0,09	0,13	0,17	0,10	0,15	0,20	0,09	0,17	0,21
													0,13	0,17	0,21	0,09	0,13	0,17	0,10	0,15	0,20	0,09	0,17	0,21
													0,11	0,15	0,19	0,08	0,11	0,15	0,09	0,13	0,18	0,08	0,15	0,19

F Finishing
M Medium machining
R Roughing

	Feed rate per cutting edge [mm]															
	FMR03			FMR03			FMR04			FMR04			FMR04			
	RDKW08			RD*10			RD*12			RDKW16			RDKW20			
	Application															
	F	M	R	F	M	R	F	M	R	F	M	R	F	M	R	
		0,17			0,20		0,15	0,20	0,25	0,17	0,23	0,29	0,2	0,26	0,33	
		0,16			0,19		0,14	0,19	0,23	0,16	0,21	0,27	0,19	0,25	0,31	
		0,15			0,18		0,13	0,18	0,22	0,15	0,20	0,25	0,18	0,23	0,29	
		0,12			0,14		0,11	0,14	0,18	0,12	0,16	0,20	0,14	0,19	0,23	
		0,19			0,22		0,17	0,22	0,28	0,19	0,25	0,32	0,22	0,29	0,36	
		0,17			0,20		0,15	0,20	0,25	0,17	0,23	0,29	0,20	0,26	0,33	
		0,17			0,20		0,15	0,20	0,25	0,17	0,23	0,29	0,20	0,26	0,33	
					0,17		0,13	0,17	0,21							
					0,17		0,13	0,17	0,21							
					0,15		0,11	0,15	0,19							

F Finishing
M Medium machining
R Roughing

Recommended feed rate

Indexable milling – group 3 (FMR01/02/03/04) Circular milling

Material group		Feed rate per cutting edge [mm]							
		FMR01	FMR01	FMR02	FMR02		FMR02		FMR03
		RCKT10	RC*12	RC*12	RCKT16		RCKT20		RDKW07
		Tool diameter [mm]							
		25-32	40-50	50-100	63-125	160-200	80-125	160-250	15
P	Unalloyed steel	0,12	0,16	0,18	0,24	0,32	0,26	0,35	0,07
P	Low-alloyed steel	0,11	0,14	0,16	0,21	0,28	0,23	0,31	0,06
P	High-alloyed steel and high-alloyed tool steel	0,10	0,13	0,14	0,19	0,26	0,21	0,28	0,06
M	Stainless steel	0,07	0,09	0,10	0,14	0,18	0,15	0,20	0,04
K	Grey cast iron	0,11	0,14	0,16	0,22	0,29	0,23	0,32	0,06
K	Cast iron with spheroidal graphite	0,10	0,13	0,14	0,19	0,26	0,21	0,28	0,06
K	Malleable cast iron	0,10	0,13	0,14	0,19	0,26	0,21	0,28	0,06
N	Aluminium wrought alloys								
N	Aluminum cast alloys								
N	Copper and copper alloys (bronze/brass)								
S	Heat-resistant alloys								
S	Titanium alloys								
H	Hardened steel								
H	Hard cast iron								
H	Hardened cast iron								
X	Non-metallic materials								

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Indexable milling – group 4 (BMR01/02/03/04, TMP01, CMZ01, CMA01, CMD01)


Material group		Feed rate per cutting edge [mm]								
		BMR01	BMR01	BMR01	BMR01	BMR02	BMR02	BMR02	BMR03	BMR03
		ZD*08 / SP*06	ZD*11 / SP*06	ZD*13 / SP*09	ZP*22 / SP*12	ROHX12	ROHX16	ROHX20	-	-
		Tool diameter [mm]								
		20	25	32	40-63	12	16	20	16	20
P	Unalloyed steel	0,14	0,21	0,26	0,32	0,10	0,13	0,14	0,13	0,14
P	Low-alloyed steel	0,10	0,15	0,18	0,22	0,07	0,09	0,10	0,09	0,10
P	High-alloyed steel and high-alloyed tool steel	0,09	0,14	0,17	0,21	0,07	0,08	0,09	0,08	0,09
M	Stainless steel	0,08	0,12	0,14	0,18	0,06	0,07	0,08	0,07	0,08
K	Grey cast iron	0,18	0,27	0,34	0,42	0,13	0,17	0,18	0,17	0,18
K	Cast iron with spheroidal graphite	0,13	0,20	0,25	0,30	0,10	0,12	0,13	0,12	0,13
K	Malleable cast iron	0,14	0,21	0,26	0,32	0,10	0,13	0,14	0,13	0,14
N	Aluminum wrought alloys									
N	Aluminum cast alloys									
N	Copper and copper alloys (bronze/brass)									
S	Heat-resistant alloys									
S	Titanium alloys									
H	Hardened steel									
H	Hard cast iron									
H	Hardened cast iron									
X	Non-metallic materials									

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

	Feed rate per cutting edge [mm]					
	FMR03	FMR03	FMR04	FMR04	FMR04	
	RDKW08	RD*10	RD*12	RDKW16	RDKW20	
	Tool diameter [mm]					
	16-25	32	50-63	80-100	125-160	
	0,07	0,12	0,17	0,24	0,30	
	0,06	0,11	0,15	0,21	0,26	
	0,06	0,10	0,14	0,19	0,24	
	0,04	0,07	0,10	0,14	0,17	
	0,06	0,11	0,15	0,22	0,27	
	0,06	0,10	0,14	0,19	0,24	
	0,06	0,10	0,14	0,19	0,24	
		0,10	0,11			
		0,10	0,11			
		0,10	0,11			








	Feed rate per cutting edge [mm]											
	BMR03	BMR03	BMR03	BMR04	BMR04	BMR04	BMR04	BMR04	CMZ01	CMA01	CMD01	
	-	-	-	ZOHX12	ZOHX16	ZOHX20	ZOHX25	ZOHX30	SPMT12	SPMT12	SPMT12	
	Tool diameter [mm]											
	25	30-32	40-50	12	16	20	25	30	12-32	12-32	12-36	
	0,21	0,26	0,30	0,10	0,13	0,14	0,16	0,17	0,23	0,23	0,23	
	0,15	0,18	0,21	0,07	0,09	0,10	0,11	0,12	0,16	0,16	0,16	
	0,14	0,17	0,20	0,07	0,08	0,09	0,10	0,11	0,15	0,15	0,15	
	0,12	0,14	0,17	0,06	0,07	0,08	0,09	0,09	0,13	0,13	0,13	
	0,27	0,34	0,39	0,13	0,17	0,18	0,21	0,22	0,30	0,30	0,30	
	0,20	0,25	0,29	0,10	0,12	0,13	0,15	0,16	0,22	0,22	0,22	
	0,21	0,26	0,30	0,10	0,13	0,14	0,16	0,17	0,23	0,23	0,23	

Face milling









Series	Milling body	Inserts	Kr	Application						Features	Page
				P	M	K	N	S	H		
FMD02		 HNEX0905	55°			✔				• Diameter range Ø80 – 315 mm • For cast iron • Wedge clamping • Inserts with twelve cutting edges	B63
FMD03		 LNKT2007-ZR LNKT2510-ZR	60°	✔		✔				• Diameter range Ø100 – 400 mm • For steel, stainless steel and cast iron • Tangential insert with four cutting edges • Heavy duty machining for high cutting depths• Screw clamping	B65
FME02		 SPKT1204 SPKW1204	75°	✔	✔	✔				• Diameter range Ø50 – 125 mm • For steel and cast iron • Screw clamping	B67
FME03		 SPKN1203 SPKR1203 SPEX1203 SPKN1504 SPKR1504 SPEX1504	75°	✔	✔	✔				• Diameter range Ø80 – 400 mm • For steel and cast iron • Wedge clamping	B69
FME04		 LNKT1506-ZR	75°	✔		✔				• Diameter range Ø125 – 315 mm • For steel, stainless steel and cast iron • Tangential insert with four cutting edges • Heavy duty machining for high cutting depths • Screw clamping	B72
FMP01		 TPKN2204	90°	✔	✔	✔		✔		• Diameter range Ø80 – 315 mm • For steel, stainless steel and cast iron • Milling cutter with positive, soft cutting geometry • Wedge clamping	B74

✔ Very suitable ✔ Suitable


Coated cemented carbide CVD

Grade	ISO	Micro structure	Grade description
YBC302	P20 - P35		CVD coated P20–P35 carbide grade for medium operation to roughing of steel at higher cutting speed. Optimal performance of wear resistance and toughness for a wide application field.
YBC301	P20 - P35		CVD coated P20–P35 carbide grade for medium operation to roughing of steel at lower cutting speed.
YBC401	P30 - P50 M30 - M40		CVD coated P30–P50/M30–M40 carbide grade for roughing operation of steel at lower cutting speed and unstable condition.
YBM251	P20 - P30 M15 - M35		CVD coated P20–P30/M15–M35 carbide grade for medium to roughing operation in stainless steel and steel with wide application field. Good wear resistance and capability against plastic deformation at normal cutting speed.
YBM253	M15 - M35		CVD coated M15–M35 carbide grade for medium to roughing operation in stainless steel with wide application field. High wear resistance and capability against plasctic deformation at higher cutting speed.
YBM351	P25 - P40 M20 - M40		CVD coated P25–P40/M25–M40 carbide grade for roughing operation in stainless steel and steel. Good wear resistance and edge stability at normal cutting speed.
YBD152	K10 - K25		CVD coated K10–K25 carbide substrate. Optimized for medium to roughing operation of cast iron. Good wear resistance and toughness at higher cutting speed.
YBD252	K20 - K35		CVD coated K20–K35 carbide substrate. Optimized for medium to roughing operation of cast iron and Steel. Good wear resistance and toughness at higher cutting speed.



Coated cemented carbide PVD

Grade	ISO	Micro structure	Grade description
YBG101	N05–N20		PVD coated N05–N20 carbide substrate for finishing to semi-finishing in aluminium materials. Coating only on the top face, in combination with the aluminium chip breakers, prevents built-up edges and gives a smooth cut.
YBG102	S05 - S15		PVD coated S05–S15 carbide substrate for finishing to medium application of super alloy material, stainless steel and aluminum. Good wear resistance in a wide application field.
YBG202	P10 - P30 M10-M25		PVD coated P10–P30/M10–M25 carbide substrate for finishing to medium application of stainless steel and steel (milling). Good wear resistance in a wide application field.
YBG212	P25 - P35 M25-M40		PVD coated M25–M40/P25–P35 carbide substrate for steel and stainless steel. Especially for inner insert at drilling operation.
YBS203	S15 – S25		Turning and milling grades for processing heat-resistant materials. A special carbon substrate and the latest PVD coating technology enable a very good wear behaviour, high fracture toughness and high thermal stability.
YBG205	P10 - P30 M20 - M40 S15-S25		PVD multilayer coated P10–P30/M20–M40/S15–S25 carbide substrate for finishing to medium machining of stainless steel, super alloys and steel (milling). Excellent wear resistance and thermal stability in a wide range of applications.
YB9320	P10 - P30 M10-M25		PVD multilayer coated P10–P30/M10–M25 carbide substrate for finishing to medium machining of stainless steel, super alloys and steel (grooving/milling). Optimised coating stability for higher wear resistance and thermal stability in a wide range of applications.
YBG302	P15 - P30 M25 - M40		PVD coated P15–P30/M25–M40 carbide substrate for medium roughing application of stainless steel and steel (milling). Good wear resistance and toughness.



Coated cemented carbide PVD

Grade	ISO	Micro structure	Grade description
YBS303	S25 - S35		Milling grade for machining titanium alloys. A tough carbide substrate and the latest PVD coating technology with increased impact resistance and high thermal stability.

Cermet

Grade	ISO	Micro structure	Grade description
YNG151	P05 - P15		Uncoated P05–P15 cermet grade for fine finishing operation of steel and stainless steel. Good resistance against plastic deformation for good surface finishing.
YNG151C	P05 - P15		PVD coated P05–P15 cermet grade for fine finishing operation of steel and stainless steel. Good wear resistance and capability against plastic deformation for good surface roughness.

Uncoated cemented carbide

Grade	ISO	Micro structure	Grade description
YD101	N05 - N25 K05 - K20		Uncoated K05–K20/N05–N20 carbide substrate for fine to medium application in aluminum and other material.
YD201	K10 - K30 N10 - N30		Uncoated K10–K30/N10–N30 carbide substrate for medium application in aluminum and other material.

Application fields of grades – indexable milling

