


A

## End mill extra long cutting edge High-performance machining


Turning

### PM-4EX-G



- Factory standard
- Centre cutting
- Helix angle 30°

B

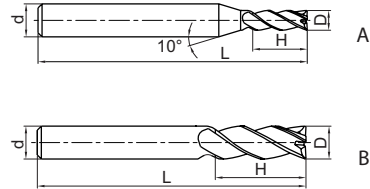

Milling

Article	*	Dimensions [mm]				Teeth	Geometry	Grade
		D	d (h6)	H	L			KMG405
PM-4EX-D3.0-G		3	6	20	75	4	A	●
PM-4EX-D4.0-G		4	6	25	75	4	A	●
PM-4EX-D5.0-G		5	6	30	75	4	A	●
PM-4EX-D6.0-G		6	6	30	75	4	B	●
PM-4EX-D8.0-G		8	8	40	100	4	B	●
PM-4EX-D10.0-G		10	10	50	110	4	B	●
PM-4EX-D12.0-G		12	12	50	110	4	B	●
PM-4EX-D16.0-G		16	16	70	150	4	B	●
PM-4EX-D20.0-G		20	20	75	150	4	B	●

● Ex stock   ○ On demand

\* With internal cooling

C

Drilling

#### Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

D

Technical Information

E

Index

System code > B258

Cutting data > B422

Nonstandard order > B461

# Solid carbide milling Recommended cutting data

## End mill – PM series

Material group	Composition / structure / heat treatment	Brinell hardness HB	Machining group	Starting values for cutting speed $v_c$ [m/min]								
				PM-2E PM-4E PM-4E-G				PM-4EL PM-4EL-G PM-4EX-G				
				Slot milling		Shoulder milling		Slot milling		Shoulder milling		
				$\emptyset$ [mm]	$a_{p\max}$	$\emptyset$ [mm]	$a_{e\max}$	$\emptyset$ [mm]	$a_{p\max}$	$\emptyset$ [mm]	$a_{e\max}$	
				$0 < x < 3$	$0,15 \times D$	$0 < x \leq 20$	$0,15 \times D$	$0 < x < 3$	$0,15 \times D$	$0 < x \leq 20$	$0,15 \times D$	
				$3 \leq x < 6$	$0,3 \times D$			$3 \leq x < 6$	$0,3 \times D$			
				$6 \leq x \leq 20$	$0,5 \times D$			$6 \leq x \leq 20$	$0,5 \times D$			
				KMG405				KMG405				
				$a_e / D$				$a_e / D$				
				1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	
P Unalloyed steel	approx. 0,15 % C	annealed	125	1	165	220	300	1	140	190	255	1
	approx. 0,45 % C	annealed	190	2	160	210	285	1	135	185	245	1
	approx. 0,45 % C	tempered	250	3	120	155	210	1	100	135	180	1
	approx. 0,75 % C	annealed	270	4	100	135	180	1	85	115	155	1
	approx. 0,75 % C	tempered	300	5	95	125	165	1	80	105	145	1
Low-alloyed steel		annealed	180	6	125	165	225	1	110	145	195	1
		tempered	275	7	100	135	180	1	85	115	155	1
		tempered	300	8	95	125	165	1	80	105	145	1
		tempered	350	9	90	115	160	1	75	100	135	1
High-alloyed steel and high-alloyed tool steel		annealed	200	10	120	155	210	1	100	135	180	1
		hardened and tempered	325	11	90	120	160	1	75	105	140	1
M Stainless steel	ferritic/martensitic	annealed	200	12	55	75	100	1	45	65	85	1
	martensitic	tempered	240	13	50	65	85	1	40	55	75	1
	austenitic	quench hardened	180	14	60	75	105	1	50	65	90	1
	austenitic-ferritic		230	15	50	65	85	1	40	55	75	1
K Grey cast iron	perlitic/ferritic		180	16	125	165	220	1	105	140	190	1
	perlitic (martensitic)		260	17	100	135	180	1	85	115	155	1
	ferritic		160	18	150	200	270	1	130	175	230	1
Cast iron with spheroidal graphite	perlitic		250	19	120	155	210	1	100	135	180	1
	ferritic		130	20	165	220	300	1	145	190	255	1
Malleable cast iron	perlitic		230	21	135	180	240	1	115	155	205	1
N Aluminium wrought alloys	cannot be hardened		60	22								
	hardenable	hardened	100	23								
	$\leq 12\%$ Si, cannot be hardened		75	24								
	$\leq 12\%$ Si, hardenable	hardened	90	25								
Cast aluminium alloys	$> 12\%$ Si, cannot be hardened		130	26								
Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27								
	CuZn, CuSnZn		90	28								
	CuSn, Pb-free copper, electrolytic copper		100	29								
S Heat-resistant alloys	Fe-based alloys	annealed	200	30								
		hardened	280	31								
	Ni or Co base	annealed	250	32								
		hardened	350	33								
		cast	320	34								
Titanium alloys	pure titanium		$R_m$ 400	35								
	$\alpha$ and $\beta$ alloys	hardened	$R_m$ 1050	36								
H Hardened steel		hardened and tempered	55 HRC	37	80	105	140	1	65	90	120	1
		hardened and tempered	60 HRC	38								
	Hard cast iron	cast	400	39	105	140	185	1	85	120	160	1
Hardened cast iron		hardened and tempered	55 HRC	40								
X Non-metallic materials	Thermoplasts			41								
	Thermosetting plastics			42								
	Plastic, glass-fibre reinforced GFRP			43								
	Plastic, carbon fibre reinforced CFRP			44								
	Graphite			45								
	Wood			46								

Note: The given cutting values are guide values, which were determined under ideal conditions.  
 The values have to be adapted in individual cases.  
 Feed rate recommendations on page B460.  
 For examples of material for cutting tool groups view page D22.

Starting values for cutting speed $v_c$ [m/min]																				
GM-2EL GM-2EX GM-2FL				GM-2EP GM-2ES				GM-3E GM-4E GM-4E-G				GM-2EL GM-4EL-G				5501R303GM 5601R303GM 5502R303GM 5602R303GM				
Slot milling		Shoulder milling		Slot milling		Shoulder milling		Slot milling		Shoulder milling		Slot milling		Shoulder milling		Slot milling		Shoulder milling		
$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	$\varnothing$ [mm]	$a_p$ max	$\varnothing$ [mm]	$a_e$ max	
$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	$0 < x < 3$	$0,1 \times D$	$0 < x \leq 20$	$< 0,5 \times D$	
$3 \leq x \leq 20$	$0,8 \times D$			$3 \leq x \leq 20$	$0,8 \times D$			$3 \leq x \leq 20$	$0,8 \times D$			$3 \leq x \leq 20$	$0,8 \times D$			$3 \leq x \leq 20$	$0,8 \times D$			
KMG303				KMG303				KMG303				KMG303				KMG303				
$a_e / D$				$a_e / D$				$a_e / D$				$a_e / D$				$a_e / D$				
1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	
130	170	230	2	150	200	270	2	150	200	270	2	130	170	230	2	140	185	245	2	
125	165	220	2	145	190	260	2	145	190	260	2	125	165	220	2	135	180	235	2	
95	120	165	2	105	140	190	2	105	140	190	2	95	120	165	2	100	130	175	2	
80	105	140	2	90	120	165	2	90	120	165	2	80	105	140	2	85	115	150	2	
75	95	130	2	85	110	150	2	85	110	150	2	75	95	130	2	80	105	135	2	
100	130	175	2	115	150	205	2	115	150	205	2	100	130	175	2	105	140	185	2	
80	105	140	2	90	120	165	2	90	120	165	2	80	105	140	2	85	115	150	2	
75	95	130	2	85	110	150	2	85	110	150	2	75	95	130	2	80	105	135	2	
70	90	120	2	80	105	145	2	80	105	145	2	70	90	120	2	75	100	130	2	
95	120	165	2	105	140	190	2	105	140	190	2	95	120	165	2	100	130	175	2	
70	95	125	2	80	110	145	2	80	110	145	2	70	95	125	2	75	100	130	2	
45	55	75	2	50	65	90	2	50	65	90	2	45	55	75	2	45	60	80	2	
40	50	65	2	45	60	80	2	45	60	80	2	40	50	65	2	40	55	70	2	
45	60	80	2	55	70	95	2	55	70	95	2	45	60	80	2	50	65	85	2	
40	50	65	2	45	60	80	2	45	60	80	2	40	50	65	2	40	55	70	2	
95	125	170	2	110	150	200	2	110	150	200	2	95	125	170	2	105	140	180	2	
80	105	140	2	90	120	165	2	90	120	165	2	80	105	140	2	85	115	150	2	
120	155	210	2	135	180	245	2	135	180	245	2	120	155	210	2	130	170	225	2	
95	120	165	2	105	140	190	2	105	140	190	2	95	120	165	2	100	130	175	2	
130	170	230	2	150	200	270	2	150	200	270	2	130	170	230	2	140	185	245	2	
105	140	185	2	120	160	220	2	120	160	220	2	105	140	185	2	115	150	200	2	

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index

## Recommended feed rate

### Solid carbide milling group 1 – Square shoulder mills PM series

	$a_e / D$	Feed rate per cutting edge ( $f_z$ ) [mm]																			
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$					
<b>P</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,07	0,08	0,08	0,09	0,09	0,10				
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,09	0,10	0,10	0,12	0,12	0,13					
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20				
<b>M</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,06	0,07	0,07	0,08				
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,04	0,04	0,05	0,07	0,08	0,08	0,10	0,10	0,11				
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16				
<b>K</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,05	0,07	0,08	0,08	0,09	0,09	0,10					
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,06	0,09	0,10	0,10	0,12	0,12	0,13					
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20					
<b>H</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,05	0,06	0,06	0,07	0,07	0,08					
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,04	0,04	0,05	0,07	0,08	0,08	0,10	0,10	0,11					
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16				

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 2 – Square shoulder mills GM series

	$a_e / D$	Feed rate per cutting edge ( $f_z$ ) [mm]																		
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$				
<b>P</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09				
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12				
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18				
<b>M</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,05	0,06	0,06	0,06	0,06	0,07				
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09				
	1/10	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,10	0,11	0,11	0,13	0,13	0,15				
<b>K</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09				
	1/2	0,01	0,03	0,03	0,03	0,03	0,03	0,04	0,04	0,05	0,08	0,09	0,09	0,10	0,10	0,12				
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18				

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 3 – Square shoulder mills HM series

	$a_e / D$	Feed rate per cutting edge ( $f_z$ ) [mm]																		
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$				
<b>H</b>	1/1	0,01	0,02	0,02	0,02	0,02	0,02	0,02	0,02	0,03	0,05	0,06	0,06	0,06	0,06	0,07				
	1/2	0,01	0,02	0,02	0,02	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09				
	1/10	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,10	0,11	0,11	0,13	0,13	0,15				

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.

### Solid carbide milling group 4 – Square shoulder mills AL/NM series

	$a_e / D$	Feed rate per cutting edge ( $f_z$ ) [mm]																		
		$\emptyset 0,5$	$\emptyset 0,8$	$\emptyset 1$	$\emptyset 2$	$\emptyset 3$	$\emptyset 4$	$\emptyset 5$	$\emptyset 6$	$\emptyset 8$	$\emptyset 10$	$\emptyset 12$	$\emptyset 14$	$\emptyset 16$	$\emptyset 18$	$\emptyset 20$				
<b>N</b>	1/1	0,02	0,03	0,03	0,03	0,03	0,03	0,05	0,05	0,06	0,09	0,11	0,11	0,12	0,12	0,14				
	3/4	0,02	0,04	0,04	0,04	0,04	0,04	0,06	0,06	0,08	0,12	0,14	0,14	0,16	0,16	0,18				
	1/10	0,03	0,06	0,06	0,06	0,06	0,06	0,09	0,09	0,12	0,19	0,22	0,22	0,25	0,25	0,28				
	1/20	0,04	0,08	0,08	0,08	0,08	0,08	0,12	0,12	0,16	0,23	0,27	0,27	0,31	0,31	0,35				

Note: The given cutting values are guide values, which were determined under ideal conditions.  
The values have to be adapted in individual cases.




# PM series

*For demanding applications*

- For machining of steel to max. 55 HRC and cast iron to heat-resistant alloys.
- Very solid cutting edge with high stiffness for higher cutting speeds and feed rates.
- End mills, ball nose cutters, torus mills and high feed mills
- Diameter range 3.0–20.0 mm

Application fields for machining of steel

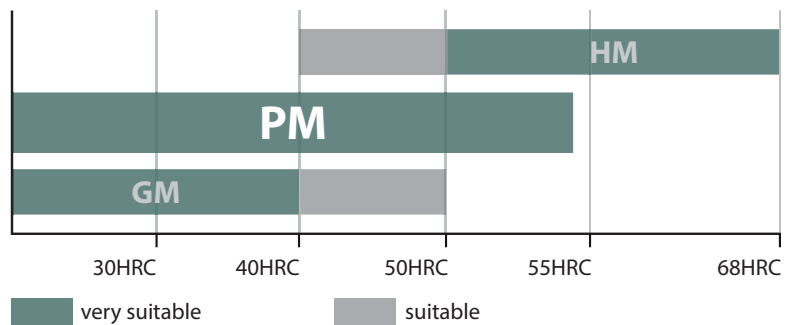

**GM – 2 E L P – D12 R0.5 – M08 – W**

**1      2      3      4      5      6      7      8      9**

Application	
Code	Description
GR	General roughing
GM	Semi-finishing
GF	Finishing
PM	High-performance machining
HM	Hard machining
HH	High-speed hard machining
NM	General machining of non-ferrous metals
AL	General machining of Al and Al alloys
ALP	High-performance machining of Al and Al alloys
ALG	General machining of Al and Al alloys
UM	HSC/HPC machining
VSM	General machining of heat-resistant alloys

**Number of teeth**

**1**
**2**

Cutting edge type		Cutting edge length	
Code	Description	Code	Description
E	Square shoulder mill with protective chamfer	L	Long
F	Square shoulder mill with sharp cutting edges	X	Extra long
B	Ball nose cutter	F	Short
R	Torus mill		
W	Ripper		
H	High-feed mill		


**3**
**4**

Type		Diameter [mm]	
Code	Description	Code	Description
S	Mini diameter	D3.0	3,0
P	Ground neck	D8.0	8,0
C	Conical neck	D20.0	20,0
		...	

**5**
**6**

Radius [mm]		Features		Weldon shank
Code	Description	Code	Description	
R0.5	0,5	G	Spiral angle 30°	
R1.0	1,5	M	Neck length [mm]	
R3.0	3,0	S	Thin shank	
...		AIR	For aerospace industry	

**7**
**8**
**9**

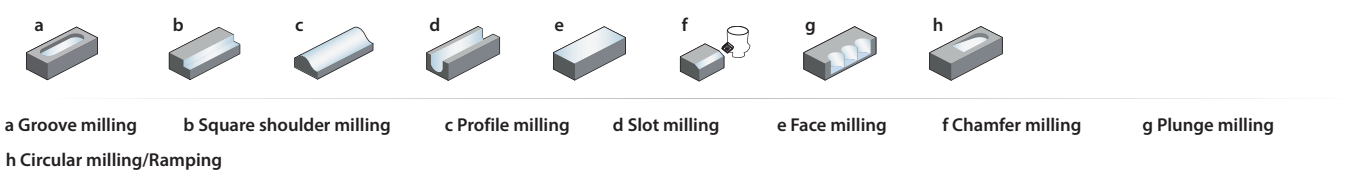

**A**  
Turning  
  
**B**  
Milling  
  
**C**  
Drilling  
  
**D**  
Technical Information  
  
**E**  
Index

## A

Turning

### Coated cemented carbide PVD

Grade	Grade description
<b>KMD401</b>	PVD coated carbide substrate for high performance milling application of non-ferrous metals, CFRP and GFRP and organic materials. The DLC layer has very good wear protection and high thermal stability.

## B

Milling

<b>KMG303</b>	PVD coated carbide substrate for universal milling application of steel (up to HRC<=48), stainless steel and cast iron.
---------------	---

<b>KMG405</b>	PVD coated carbide substrate for high performance milling application of steel (up to HRC <55), stainless steel, super alloy material and cast iron. High wear resistance and toughness for a wide application field.
---------------	---

## C

Drilling

<b>KMG555</b>	PVD coated carbide substrate for hard milling application of steel (HRC 55–68), highest wear resistance and toughness for best cutting result.
---------------	--

<b>KMG309</b>	PVD coated carbide substrate for non ferrous materials. High wear resistance even in abrasive materials.
---------------	--

## D

Technical Information

### Uncoated cemented carbide





















Grade	Grade description
<b>YK30F</b>	Uncoated K30 carbide substrate for steel, stainless steel, cast iron and non ferrous materials.

## E

Index

<b>YK40F</b>	Uncoated K20–K30/N20–N30 carbide substrate for cast iron and non ferrous materials.
--------------	---

## High performance milling

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
PM-2E		2	1.0-20.0	✓	✓	✓			✓	End mills	B330
PM-2EL		2	3.0-20.0	✓	✓	✓			✓	End mills	B331
PM-4E-G		4	1.0-20.0	✓	✓	✓			✓	End mills	B332
PM-4EL-G		4	3.0-20.0	✓	✓	✓			✓	End mills	B333
PM-4EX-G		4	3.0-20.0	✓	✓	✓			✓	End mills	B334
PM-4E		4	1.0-20.0	✓	✓	✓			✓	End mills	B335
PM-4EL		4	3.0-20.0	✓	✓	✓			✓	End mills	B336
PM-6E		6	6.0-20.0	✓	✓	✓			✓	End mills	B337
PM-6EL		6	6.0-20.0	✓	✓	✓			✓	End mills	B338
PM-2B		2	1.0-20.0	✓	✓	✓			✓	Ball nose cutters	B339
PM-2BL		2	2.0-20.0	✓	✓	✓			✓	Ball nose cutters	B340
PM-2BFP		2	1.0-20.0	✓	✓	✓			✓	Ball nose cutters	B341
PM-2BC		2	0.5-4.0	✓	✓	✓			✓	Ball nose cutter with conical neck	B342
PM-4B		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B345
PM-4BL		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B346
PM-2R		2	1.0-12.0	✓	✓	✓			✓	Torus mills	B347
PM-4R		4	3.0-12.0	✓	✓	✓			✓	Torus mills	B350
PM-4RL		4	6.0-16.0	✓	✓	✓			✓	Torus mills	B351
PM-4H		4	3.0-12.0	✓	✓	✓			✓	High-feed mills	B348
PM-4HL		4	4.0-12.0	✓	✓	✓			✓	High-feed mills	B349

✓ Very suitable    ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index