



A

End mill High-performance machining

PM-4H



- Factory standard
- Centre cutting
- Helix angle 0°

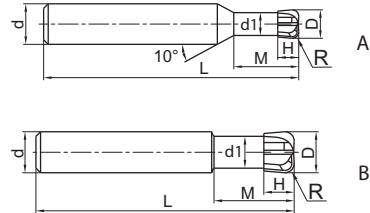

Turning

B

Milling

Article	*	Dimensions [mm]							Teeth	Geometry	Grade
		R	D	d (h6)	d ₁	H	M	L			KMG405
PM-4H-D3.0R0.8		0.8	3	6	2.7	1.2	8	50	4	A	●
PM-4H-D4.0R1.0		1	4	6	3.6	1.6	10	50	4	A	●
PM-4H-D5.0R1.2		1.2	5	6	4.5	2	12.5	50	4	A	●
PM-4H-D6.0R1.0		1	6	6	5.4	2.5	12	50	4	B	●
PM-4H-D6.0R1.5		1.5	6	6	5.4	2.5	12	50	4	B	●
PM-4H-D6.0R2.0		2	6	6	5.4	2.5	12	50	4	B	●
PM-4H-D8.0R1.0		1	8	8	7	3.5	16	60	4	B	●
PM-4H-D8.0R2.0		2	8	8	7	3.5	16	60	4	B	●
PM-4H-D10.0R1.0		1	10	10	9	4	20	75	4	B	●
PM-4H-D10.0R2.0		2	10	10	9	4	20	75	4	B	●
PM-4H-D10.0R3.0		3	10	10	9	4	20	75	4	B	●
PM-4H-D12.0R2.0		2	12	12	11	5	24	75	4	B	●
PM-4H-D12.0R3.0		3	12	12	11	5	24	75	4	B	●

● Ex stock ○ On demand

* With internal cooling

C

Drilling

D

Technical Information

Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

E

Index

System code > B268

Cutting data > B436

Nonstandard order > B477

Recommended feed rate

Solid carbide milling group 5 – Ball nose cutters GM series

	a _e / D	Feed rate per cutting edge (f _z) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
P	1/1																
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
	1/20	0,03	0,06	0,06	0,06	0,06	0,06	0,08	0,08	0,11	0,17	0,20	0,20	0,23	0,23	0,25	
M	1/1																
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
	1/20	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,21	
K	1/1																
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,20	
	1/20	0,03	0,06	0,06	0,06	0,06	0,06	0,08	0,08	0,11	0,17	0,20	0,20	0,23	0,23	0,25	
H	1/1																
	1/10	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
	1/20	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,21	

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Solid carbide milling group 6 – High feed mills PM series

	a _e / D	Feed rate per cutting edge (f _z) [mm]							
		Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	
P	1/1								
	1/10								
	1/20	0,15	0,25	0,28	0,33	0,44	0,55	0,66	
M	1/1								
	1/10								
	1/20	0,12	0,22	0,25	0,30	0,41	0,52	0,63	
K	1/1								
	1/10								
	1/20	0,15	0,25	0,28	0,33	0,44	0,55	0,66	
H	1/1								
	1/10								
	1/20	0,12	0,22	0,25	0,30	0,41	0,52	0,63	

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Solid carbide milling group 7 – Ball nose cutters HM series

	a _e / D	Feed rate per cutting edge (f _z) [mm]															
		Ø0,5	Ø0,8	Ø 1	Ø 2	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20	
H	1/1																
	1/2	0,02	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,07	0,11	0,13	0,13	0,15	0,15	0,16	
	1/10	0,02	0,05	0,05	0,05	0,05	0,05	0,07	0,07	0,09	0,14	0,16	0,16	0,18	0,18	0,21	

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Solid carbide milling group 8 – High feed mills AL series

	a _e / D	Feed rate per cutting edge (f _z) [mm]							
		Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20
N	1/1	0,04	0,05	0,08	0,09	0,11	0,13	0,16	0,18
	3/4	0,05	0,07	0,10	0,12	0,14	0,16	0,20	0,23
	1/10	0,08	0,11	0,16	0,19	0,22	0,25	0,31	0,36

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index




PM series

For demanding applications

- For machining of steel to max. 55 HRC and cast iron to heat-resistant alloys.
- Very solid cutting edge with high stiffness for higher cutting speeds and feed rates.
- End mills, ball nose cutters, torus mills and high feed mills
- Diameter range 3.0–20.0 mm

Application fields for machining of steel

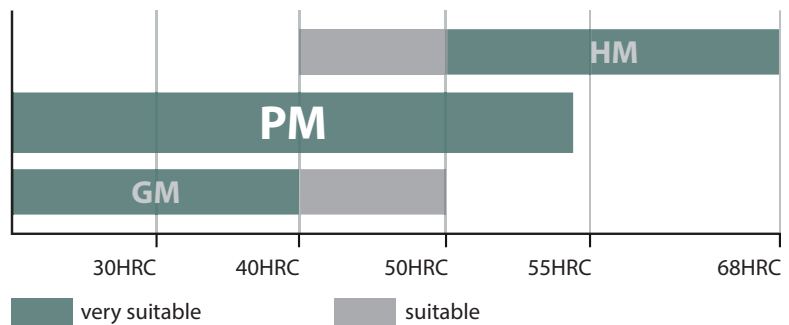

GM – 2 E L P – D12 R0.5 – M08 – W

1 **2** **3** **4** **5** **6** **7** **8** **9**

Application	
Code	Description
GR	General roughing
GM	Semi-finishing
GF	Finishing
PM	High-performance machining
HM	Hard machining
HH	High-speed hard machining
NM	General machining of non-ferrous metals
AL	General machining of Al and Al alloys
ALP	High-performance machining of Al and Al alloys
ALG	General machining of Al and Al alloys
UM	HSC/HPC machining
VSM	General machining of heat-resistant alloys

Number of teeth

1

2

Cutting edge type		Cutting edge length	
Code	Description	Code	Description
E	Square shoulder mill with protective chamfer	L	Long
F	Square shoulder mill with sharp cutting edges	X	Extra long
B	Ball nose cutter	F	Short
R	Torus mill		
W	Ripper		
H	High-feed mill		

3

4

Type		Diameter [mm]	
Code	Description	Code	Description
S	Mini diameter	D3.0	3,0
P	Ground neck	D8.0	8,0
C	Conical neck	D20.0	20,0
		...	

5


6

Radius [mm]		Features		Weldon shank
Code	Description	Code	Description	
R0.5	0,5	G	Spiral angle 30°	
R1.0	1,5	M	Neck length [mm]	
R3.0	3,0	S	Thin shank	
...		AIR	For aerospace industry	

7

8

9

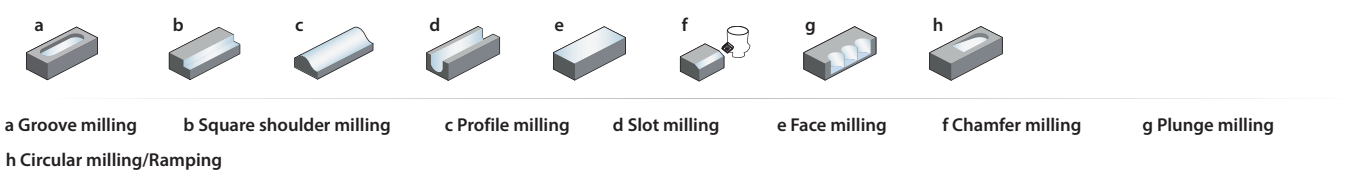

A

Turning

Coated cemented carbide PVD

Grade	Grade description
-------	-------------------

KMD401 PVD coated carbide substrate for high performance milling application of non-ferrous metals, CFRP and GFRP and organic materials. The DLC layer has very good wear protection and high thermal stability.

B

Milling

KMG303 PVD coated carbide substrate for universal milling application of steel (up to HRC<=48), stainless steel and cast iron.

KMG405 PVD coated carbide substrate for high performance milling application of steel (up to HRC <55), stainless steel, super alloy material and cast iron. High wear resistance and toughness for a wide application field.

C

Drilling

KMG555 PVD coated carbide substrate for hard milling application of steel (HRC 55–68), highest wear resistance and toughness for best cutting result.

KMG309 PVD coated carbide substrate for non ferrous materials. High wear resistance even in abrasive materials.

D

Technical Information

Uncoated cemented carbide

Grade	Grade description
-------	-------------------





















YK30F Uncoated K30 carbide substrate for steel, stainless steel, cast iron and non ferrous materials.

E

Index

YK40F Uncoated K20–K30/N20–N30 carbide substrate for cast iron and non ferrous materials.

High performance milling

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
PM-2E		2	1.0-20.0	✓	✓	✓			✓	End mills	B330
PM-2EL		2	3.0-20.0	✓	✓	✓			✓	End mills	B331
PM-4E-G		4	1.0-20.0	✓	✓	✓			✓	End mills	B332
PM-4EL-G		4	3.0-20.0	✓	✓	✓			✓	End mills	B333
PM-4EX-G		4	3.0-20.0	✓	✓	✓			✓	End mills	B334
PM-4E		4	1.0-20.0	✓	✓	✓			✓	End mills	B335
PM-4EL		4	3.0-20.0	✓	✓	✓			✓	End mills	B336
PM-6E		6	6.0-20.0	✓	✓	✓			✓	End mills	B337
PM-6EL		6	6.0-20.0	✓	✓	✓			✓	End mills	B338
PM-2B		2	1.0-20.0	✓	✓	✓			✓	Ball nose cutters	B339
PM-2BL		2	2.0-20.0	✓	✓	✓			✓	Ball nose cutters	B340
PM-2BFP		2	1.0-20.0	✓	✓	✓			✓	Ball nose cutters	B341
PM-2BC		2	0.5-4.0	✓	✓	✓			✓	Ball nose cutter with conical neck	B342
PM-4B		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B345
PM-4BL		4	3.0-20.0	✓	✓	✓			✓	Ball nose cutters	B346
PM-2R		2	1.0-12.0	✓	✓	✓			✓	Torus mills	B347
PM-4R		4	3.0-12.0	✓	✓	✓			✓	Torus mills	B350
PM-4RL		4	6.0-16.0	✓	✓	✓			✓	Torus mills	B351
PM-4H		4	3.0-12.0	✓	✓	✓			✓	High-feed mills	B348
PM-4HL		4	4.0-12.0	✓	✓	✓			✓	High-feed mills	B349

✓ Very suitable ✓ Suitable

A

Turning

B

Milling

C

Drilling

D

Technical Information

E

Index