


A

Turning


Torus mill

HSC/HPC machining

UM-4R



- Factory standard
- Centre cutting
- Helix angle 38°/41°

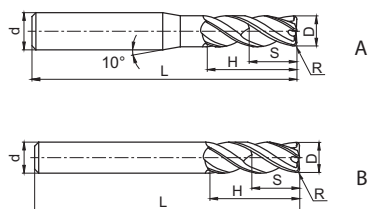

B

Milling

Article	*	Dimensions [mm]						Teeth	Geometry	Grade
		R	D	d (h6)	H	L	S			
UM-4R-D4.0R0.3		0.3	4	6	10	50	6	4	A	●
UM-4R-D4.0R0.5		0.5	4	6	10	50	6	4	A	●
UM-4R-D5.0R0.5		0.5	5	6	13	50	7.5	4	A	●
UM-4R-D5.0R1.0		1	5	6	13	50	7.5	4	A	●
UM-4R-D6.0R0.5		0.5	6	6	16	50	9	4	B	●
UM-4R-D6.0R1.0		1	6	6	16	50	9	4	B	●
UM-4R-D8.0R0.5		0.5	8	8	20	60	12	4	B	●
UM-4R-D8.0R1.0		1	8	8	20	60	12	4	B	●
UM-4R-D10.0R0.5		0.5	10	10	25	75	15	4	B	●
UM-4R-D10.0R1.0		1	10	10	25	75	15	4	B	●
UM-4R-D10.0R2.0		2	10	10	25	75	15	4	B	●
UM-4R-D10.0R3.0		3	10	10	25	75	15	4	B	●
UM-4R-D12.0R0.5		0.5	12	12	30	75	18	4	B	●
UM-4R-D12.0R1.0		1	12	12	30	75	18	4	B	●
UM-4R-D12.0R2.0		2	12	12	30	75	18	4	B	●
UM-4R-D12.0R3.0		3	12	12	30	75	18	4	B	●
UM-4R-D16.0R1.0		1	16	16	45	100	24	4	B	●
UM-4R-D16.0R2.0		2	16	16	45	100	24	4	B	●
UM-4R-D16.0R3.0		3	16	16	45	100	24	4	B	●
UM-4R-D20.0R1.0		1	20	20	45	100	30	4	B	●
UM-4R-D20.0R2.0		2	20	20	45	100	30	4	B	●
UM-4R-D20.0R3.0		3	20	20	45	100	30	4	B	●

● Ex stock ○ On demand

* With internal cooling

Application field

P	M	K	N	S	H
✓	✓	✓			✓

✓ Very suitable

✓ Suitable

E

Index

System code > B268

Cutting data > B436

Nonstandard order > B477

End mill – UM/HPC/VSM series

Material group		Composition / structure / heat treatment		Brinell hardness HB	Machining group	Starting values for cutting speed v_c [m/min]								
						5501R38414GM (-R) 5502R38414GM (-R) 5602R38414GM (-R)				5501R38414GM (-R) long series 5502R38414GM (-R) long series 5602R38414GM (-R) long series				
						Slot milling		Shoulder milling		Slot milling		Shoulder milling		
						$\varnothing$ [mm]	a_p max	$\varnothing$ [mm]	a_e max	$\varnothing$ [mm]	a_p max	$\varnothing$ [mm]	a_e max	
						$0 < x < 3$	$0,3 \times D$	$0 < x < 3$	$0,15 \times D$	$0 < x < 3$	$0,3 \times D$	$0 < x < 3$	$0,15 \times D$	
						$3 \leq x < 12$	$0,7 \times D$	$3 \leq x < 20$	$0,3 \times D$	$3 \leq x < 12$	$0,7 \times D$	$3 \leq x < 20$	$0,3 \times D$	
						$12 \leq x \leq 20$	$1,5 \times D$			$12 \leq x \leq 20$	$1,5 \times D$			
KMG405				KMG405										
a_e / D				a_e / D										
1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group							
P	Unalloyed steel	approx. 0,15 % C	annealed	125	1	250	300	380	9	190	225	285	9	
		approx. 0,45 % C	annealed	190	2	240	285	365	9	185	215	275	9	
		approx. 0,45 % C	tempered	250	3	175	210	270	9	135	160	200	9	
		approx. 0,75 % C	annealed	270	4	150	180	230	9	115	135	175	9	
		approx. 0,75 % C	tempered	300	5	140	165	210	9	105	125	160	9	
	Low-alloyed steel		annealed	180	6	190	225	285	9	145	170	215	9	
			tempered	275	7	150	180	230	9	115	135	175	9	
			tempered	300	8	140	165	210	9	105	125	160	9	
			tempered	350	9	130	160	200	9	100	120	150	9	
High-alloyed steel and high-alloyed tool steel		annealed	200	10	175	210	270	9	135	160	200	9		
		hardened and tempered	325	11	135	160	205	9	105	120	155	9		
M	Stainless steel	ferritic/martensitic	annealed	200	12	80	100	125	9	65	75	95	9	
		martensitic	tempered	240	13	70	85	110	9	55	65	80	9	
		austenitic	quench hardened	180	14	85	105	130	9	65	80	100	9	
		austenitic-ferritic		230	15	70	85	110	9	55	65	80	9	
K	Grey cast iron	perlitic/ferritic		180	16	185	220	280	9	140	165	210	9	
		perlitic (martensitic)		260	17	150	180	230	9	115	135	175	9	
	Cast iron with spheroidal graphite	ferritic		160	18	225	270	345	9	175	205	260	9	
		perlitic		250	19	175	210	270	9	135	160	200	9	
	Malleable cast iron	ferritic		130	20	250	300	380	9	190	225	285	9	
		perlitic		230	21	200	240	305	9	155	180	230	9	
N	Aluminium wrought alloys	cannot be hardened		60	22									
		hardenable	hardened	100	23									
	Cast aluminium alloys	$\leq 12\%$ Si, cannot be hardened		75	24									
		$\leq 12\%$ Si, hardenable	hardened	90	25									
		$> 12\%$ Si, cannot be hardened		130	26									
	Copper and copper alloys (bronze/brass)	machining steel, PB> 1%		110	27									
		CuZn, CuSnZn		90	28									
CuSn, Pb-free copper, electrolytic copper		100	29											
S	Heat-resistant alloys	Fe-based alloys	annealed	200	30									
			hardened	280	31									
		Ni or Co bass	annealed	250	32									
			hardened	350	33									
			cast	320	34									
	Titanium alloys	pure titanium		R _m 400	35									
		α and β alloys	hardened	R _m 1050	36									
H	Hardened steel		hardened and tempered	55 HRC	37	115	140	175	9					
			hardened and tempered	60 HRC	38									
	Hard cast iron		cast	400	39	135	165	205	9					
	Hardened cast iron		hardened and tempered	55 HRC	40									
X	Non-metallic materials	Thermoplasts			41									
		Thermosetting plastics			42									
		Plastic, glass-fibre reinforced GFRP			43									
		Plastic, carbon fibre reinforced CFRP			44									
		Graphite			45									
		Wood			46									

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.
Feed rate recommendations on page B460.
For examples of material for cutting tool groups view page D22.

	Starting values for cutting speed v_c [m/min]																
	UM-4E UM-4E-W UM-4R				UM-4EL UM-4EL-W UM-4ELP UM-4EFP				UM-4RL UM-4RFP				VSM-4E VSM-4R				
	Slot milling		Shoulder milling		Slot milling		Shoulder milling		Slot milling		Shoulder milling		Slot milling		Shoulder milling		
	Ø [mm]	a_p max	Ø [mm]	a_e max	Ø [mm]	a_p max	Ø [mm]	a_e max	Ø [mm]	a_p max	Ø [mm]	a_e max					
	$0 < x < 3$	$0,3 \times D$	$0 < x < 3$	$0,15 \times D$	$0 < x < 3$	$0,3 \times D$	$0 < x < 3$	$0,15 \times D$	$0 < x < 3$	$0,3 \times D$	$0 < x < 3$	$0,15 \times D$	$0 < x < 3$	$0,3 \times D$	$0 < x < 3$	$0,15 \times D$	
	$3 \leq x < 12$	$0,7 \times D$	$3 \leq x < 20$	$0,3 \times D$	$3 \leq x < 12$	$0,7 \times D$	$3 \leq x < 20$	$0,3 \times D$	$3 \leq x < 12$	$0,7 \times D$	$3 \leq x < 20$	$0,3 \times D$	$3 \leq x < 12$	$0,7 \times D$	$3 \leq x < 20$	$0,3 \times D$	
	$12 \leq x \leq 20$	$1,5 \times D$			$12 \leq x \leq 20$	$1,5 \times D$			$12 \leq x \leq 20$	$1,5 \times D$			$12 \leq x \leq 20$	$1,5 \times D$			
	KMG405				KMG405				KMG405				KMG405				
	a_e / D				a_e / D				a_e / D				a_e / D				
	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	1/1	1/2	1/10	f-group	
	250	300	380	9	150	180	230	9	150	180	230	9	145	180	250	10	
	240	285	365	9	145	175	220	9	145	175	220	9	140	175	240	10	
	175	210	270	9	105	130	165	9	105	130	165	9	105	130	175	10	
	150	180	230	9	90	110	140	9	90	110	140	9	90	110	150	10	
	140	165	210	9	85	100	130	9	85	100	130	9	80	100	140	10	
	190	225	285	9	115	135	175	9	115	135	175	9	110	135	190	10	
	150	180	230	9	90	110	140	9	90	110	140	9	90	110	150	10	
	140	165	210	9	85	100	130	9	85	100	130	9	80	100	140	10	
	130	160	200	9	80	95	120	9	80	95	120	9	80	95	130	10	
	175	210	270	9	105	130	165	9	105	130	165	9	105	130	175	10	
	135	160	205	9	80	100	125	9	80	100	125	9	80	100	135	10	
	80	100	125	9	50	60	75	9	50	60	75	9	50	60	80	10	
	70	85	110	9	45	55	65	9	45	55	65	9	45	55	70	10	
	85	105	130	9	55	65	80	9	55	65	80	9	50	65	85	10	
	70	85	110	9	45	55	65	9	45	55	65	9	45	55	70	10	
	185	220	280	9	110	135	170	9	110	135	170	9					
	150	180	230	9	90	110	140	9	90	110	140	9					
	225	270	345	9	135	165	210	9	135	165	210	9					
	175	210	270	9	105	130	165	9	105	130	165	9					
	250	300	380	9	150	180	230	9	150	180	230	9					
	200	240	305	9	120	145	185	9	120	145	185	9					

Recommended feed rate

Solid carbide milling group 9 – Square shoulder mills UM series HSC/HPC

	a_e / D	Feed rate per cutting edge (f_z) [mm]																			
		Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20										
P	1/1	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,08	0,08	0,08										
	1/2	0,08	0,08	0,08	0,09	0,09	0,09	0,09	0,10	0,10	0,10										
	1/10	0,14	0,14	0,16	0,18	0,22	0,25	0,27	0,3	0,32	0,36										
M	1/1	0,05	0,05	0,05	0,05	0,05	0,05	0,05	0,06	0,06	0,06										
	1/2	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,08	0,08	0,08										
	1/10	0,10	0,10	0,10	0,12	0,12	0,14	0,16	0,16	0,18	0,18										
K	1/1	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,08	0,08	0,08										
	1/2	0,08	0,08	0,08	0,09	0,09	0,09	0,09	0,10	0,10	0,10										
	1/10	0,14	0,14	0,16	0,18	0,22	0,25	0,27	0,3	0,32	0,36										
H	1/1	0,045	0,045	0,045	0,053	0,053	0,053	0,053	0,06	0,06	0,06										
	1/2	0,06	0,06	0,06	0,07	0,07	0,07	0,07	0,08	0,08	0,08										
	1/10	0,10	0,10	0,10	0,12	0,12	0,14	0,16	0,16	0,18	0,18										

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Solid carbide milling group 10 – Square shoulder mills VSM series

	a_e / D	Feed rate per cutting edge (f_z) [mm]																			
		Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20										
P	1/1	0,03	0,04	0,05	0,05	0,05	0,05	0,06	0,06	0,07	0,08										
	1/2	0,04	0,06	0,07	0,07	0,07	0,07	0,08	0,09	0,10	0,11										
	1/10	0,05	0,08	0,09	0,09	0,09	0,09	0,11	0,12	0,14	0,15										
M	1/1	0,02	0,03	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,06										
	1/2	0,03	0,05	0,05	0,05	0,05	0,05	0,06	0,07	0,08	0,08										
	1/10	0,04	0,06	0,07	0,07	0,07	0,07	0,08	0,09	0,10	0,11										
S	1/1	0,02	0,03	0,04	0,04	0,04	0,04	0,04	0,05	0,05	0,06										
	1/2	0,03	0,05	0,05	0,05	0,05	0,05	0,06	0,07	0,08	0,08										
	1/10	0,04	0,06	0,07	0,07	0,07	0,07	0,08	0,09	0,10	0,11										

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

Solid carbide milling group 11 – Deburring cutters FM series

	a_e / D	Feed rate per cutting edge (f_z) [mm]																			
		Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10	Ø 12	Ø 14	Ø 16	Ø 18	Ø 20									
P	1/1																				
	1/2																				
	1/10	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09									
M	1/1																				
	1/2																				
	1/10	0,02	0,02	0,02	0,02	0,03	0,05	0,06	0,06	0,06	0,06	0,07									
K	1/1																				
	1/2																				
	1/10	0,02	0,02	0,03	0,03	0,04	0,06	0,07	0,07	0,08	0,08	0,09									
N	1/1																				
	1/2																				
	1/10	0,03	0,03	0,05	0,05	0,06	0,09	0,11	0,11	0,12	0,12	0,14									

Note: The given cutting values are guide values, which were determined under ideal conditions.
The values have to be adapted in individual cases.

UM series

High Speed Cutter (HSC)

- For roughing and finishing of steel up to 55 HRC, stainless steel and cast iron with high metal removal rate.
- Optimised geometry with unequal helix angle (38°/41°) and unequal pitch.
- End mills and torus mills
- Diameter range 4.0–20.0 mm



GM – 2 E L P – D12 R0.5 – M08 – W

1

2

3

4

5

6

7

8

9

A

Turning

B

Milling

C

Drilling

D

Technical
Information

E

Index

Application	
Code	Description
GR	General roughing
GM	Semi-finishing
GF	Finishing
PM	High-performance machining
HM	Hard machining
HH	High-speed hard machining
NM	General machining of non-ferrous metals
AL	General machining of Al and Al alloys
ALP	High-performance machining of Al and Al alloys
ALG	General machining of Al and Al alloys
UM	HSC/HPC machining
VSM	General machining of heat-resistant alloys

Number
of teeth

1

2

Cutting edge type	
Code	Description
E	Square shoulder mill with protective chamfer
F	Square shoulder mill with sharp cutting edges
B	Ball nose cutter
R	Torus mill
W	Ripper
H	High-feed mill

3

Cutting edge length	
Code	Description
L	Long
X	Extra long
F	Short

4

Type	
Code	Description
S	Mini diameter
P	Ground neck
C	Conical neck

5

Diameter [mm]	
Code	Description
D3.0	3,0
D8.0	8,0
D20.0	20,0
...	

6

Radius [mm]	
Code	Description
R0.5	0,5
R1.0	1,5
R3.0	3,0
...	

7

Features	
Code	Description
G	Spiral angle 30°
M	Neck length [mm]
S	Thin shank
AIR	For aerospace industry

8

Weldon shank	
--------------	--

9



a Groove milling



b Square shoulder milling



c Profile milling



d Slot milling



e Face milling



f Chamfer milling



g Plunge milling



h Circular milling/Ramping

A

Turning

Coated cemented carbide PVD

Grade	Grade description
KMD401	PVD coated carbide substrate for high performance milling application of non-ferrous metals, CFRP and GFRP and organic materials. The DLC layer has very good wear protection and high thermal stability.

B

Milling

KMG303	PVD coated carbide substrate for universal milling application of steel (up to HRC<=48), stainless steel and cast iron.
KMG405	PVD coated carbide substrate for high performance milling application of steel (up to HRC <55), stainless steel, super alloy material and cast iron. High wear resistance and toughness for a wide application field.

C

Drilling

KMG555	PVD coated carbide substrate for hard milling application of steel (HRC 55–68), highest wear resistance and toughness for best cutting result.
KMG309	PVD coated carbide substrate for non ferrous materials. High wear resistance even in abrasive materials.

D

Technical Information

Uncoated cemented carbide

Grade	Grade description
YK30F	Uncoated K30 carbide substrate for steel, stainless steel, cast iron and non ferrous materials.
YK40F	Uncoated K20–K30/N20–N30 carbide substrate for cast iron and non ferrous materials.

E

Index

HPC with unequal helix angle

Products	Solid carbide cutters	Teeth	Ø	Application						Type	Page
				P	M	K	N	S	H		
5501R38414GM		4	4.0-20.0	✓	✓	✓			✓	End mills	B408
5502R38414GM		4	4.0-20.0	✓	✓	✓			✓	End mills	B409
5601R38414GM		4	4.0-20.0	✓	✓	✓			✓	End mills	B410
5602R38414GM		4	3.0-20.0	✓	✓	✓			✓	End mills	B411
5502R38414GM-R		4	4.0-20.0	✓	✓	✓			✓	Torus mills	B412
5602R38414GM-R		4	4.0-20.0	✓	✓	✓			✓	Torus mills	B413
UM-4E		4	4.0-20.0	✓	✓	✓			✓	End mills	B416
UM-4E-W		4	4.0-20.0	✓	✓	✓			✓	End mills	B417
UM-4EL		4	4.0-20.0	✓	✓	✓			✓	End mills	B418
UM-4EL-W		4	4.0-20.0	✓	✓	✓			✓	End mills	B419
UM-4ELP-W		4	4.0-20.0	✓	✓	✓			✓	End mills	B420
UM-4EFP		4	6.0-20.0	✓	✓	✓			✓	End mills	B421
UM-4R		4	4.0-20.0	✓	✓	✓			✓	Torus mills	B422
UM-4RL		4	6.0-16.0	✓	✓	✓			✓	Torus mills	B423
UM-4RFP		4	6.0-16.0	✓	✓	✓			✓	Torus mills	B424
VSM-4E		4	4.0-20.0	✓	✓			✓		End mills	B426
VSM-4E-C		4	10.0-20.0	✓	✓			✓		End mills	B427
VSM-4R		4	4.0-20.0	✓	✓			✓		Torus mills	B428

✓ Very suitable ✓ Suitable