


HSS, HAND REAMERS - LH SPIRAL FLUTES

- 🇩🇪 **HSS, HAND REAMERS - LH SPIRAL FLUTES**
- 🇫🇷 **ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE**
- 🇮🇹 **ALESATORI A MANO IN HSS - ELICA SINISTRA**

- ▶ O.D. Tolerances : DIN 1420, H7
- ▶ Shank Diameter ≙ Nominal Reamer Diameter
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle- tapered
- ▶ Type of center - Up to Ø3.75 : external centers
- Over Ø3.75 : internal centers

- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø = Nomineller Reibahlen-Ø
- ▶ Spiralgenutet mit Linksdrall / Rechtsschneidend
- ▶ Anschnittwinkel - Konisch
- ▶ Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen
- über Ø3,75 mm : Zentrierung

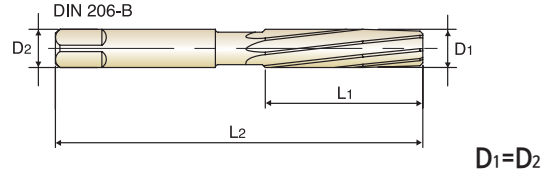

HSS **DIN 206** **H7** **LH7°**

Hole type

Unit : mm

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L ₁	L ₂	
K115300200	2.0	25	50	4
K115300220	2.2	27	54	4
K115300250	2.5	29	58	4
K115300280	2.8	31	62	4
K115300300	3.0	31	62	6
K115300320	3.2	33	66	6
K115300350	3.5	35	71	6
K115300400	4.0	38	76	6
K115300450	4.5	41	81	6
K115300500	5.0	44	87	6
K115300550	5.5	47	93	6
K115300600	6.0	47	93	6
K115300700	7.0	54	107	6
K115300800	8.0	58	115	6
K115300900	9.0	62	124	6
K115301000	10.0	66	133	6
K115301100	11.0	71	142	6
K115301200	12.0	76	152	6
K115301300	13.0	76	152	6
K115301400	14.0	81	163	8
K115301500	15.0	81	163	8
K115301600	16.0	87	175	8
K115301700	17.0	87	175	8
K115301800	18.0	93	188	8
K115301900	19.0	93	188	8
K115302000	20.0	100	201	8
K115302200	22.0	107	215	8
K115302400	24.0	115	231	8

▶NEXT PAGE

◎ : Excellent ○ : Good


ISO	P										M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○				○														

ISO	N					S					H										
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○		○	○	○													

HSS, HAND REAMERS - LH SPIRAL FLUTES

🇩🇪 HSS, HAND REAMERS - LH SPIRAL FLUTES
🇫🇷 ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE
🇮🇹 ALESATORI A MANO IN HSS - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420, H7
- ▶ Shank Diameter ≙ Nominal Reamer Diameter
- ▶ LH Spiral Flutes / Right Hand Cut
- ▶ Chamfer Angle- tapered
- ▶ Type of center - Up to Ø3.75 : external centers
 - Over Ø3.75 : internal centers
- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
- ▶ Schaft-Ø = Nomineller Reibahlen-Ø
- ▶ Geradegenutet / Rechtsschneidend
- ▶ Anschnittwinkel - Konisch
- ▶ Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen
 - über Ø3,75 mm : Zentrierung

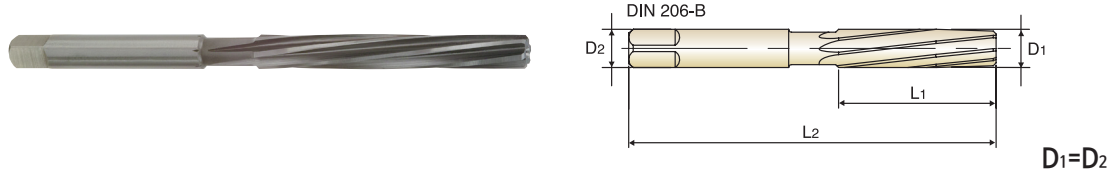

HSS
DIN 206
H7
LH7°



Unit : mm

EDP No.	Reamer Diameter		Flute Length		Overall Length		No. of Flute
	D		L1		L2		
K115302500	25.0		115		231		8
K115302600	26.0		115		231		8
K115302700	27.0		124		247		10
K115302800	28.0		124		247		10
K115302900	29.0		124		247		10
K115303000	30.0		124		247		10
K115303100	31.0		133		265		10
K115303200	32.0		133		265		10
K115303300	33.0		133		265		10
K115303400	34.0		142		284		10
K115303500	35.0		142		284		10
K115303600	36.0		142		284		10
K115303700	37.0		142		284		10
K115303800	38.0		152		305		10
K115303810	38.1		152		305		10
K115303900	39.0		152		305		10
K115304000	40.0		152		305		10
K115304100	41.0		152		305		12
K115304200	42.0		152		305		12
K115304300	43.0		163		326		12
K115304400	44.0		163		326		12
K115304500	45.0		163		326		12
K115304600	46.0		163		326		12
K115304700	47.0		163		326		12
K115304800	48.0		174		347		12
K115304900	49.0		174		347		12
K115305200	52.0		174		347		12
K115306000	60.0		184		367		12

◎ : Excellent ○ : Good

ISO	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○				○																

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○		○	○	○													

SELECTION GUIDE




SERIES

K4101

K4111

HOLETYPE



FLUTETYPE

Straight

LH Spiral

SIZE MIN

D2.0

D2.0

SIZE MAX

D20.0

D20.0

PAGE

406

407

SURFACE TREATMENT

Bright

CARBIDE, HSS & HSS-E REAMERS

Carbide NC Machine Reamers
HSS Hand Reamers
HSS-E Chucking Reamers



Please visit globalyg1.com/mat for material search


◎ : Excellent ○ : Good

Recommended cutting conditions : P.427

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	K4101	K4111
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎
	4		About 0.75% C Annealed	270	28	○	○
	5		About 0.75% C Quenched & Tempered	300	32	○	○
	6	Low alloy steel	Annealed	180	10	◎	◎
	7		Quenched & Tempered	275	29	◎	◎
	8		Quenched & Tempered	300	32	○	○
	9		Quenched & Tempered	350	38		
	10		High alloyed steel, and tool steel	Annealed	200	15	○
	11	Quenched & Tempered		325	35		
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○
	13		Martensitic Quenched & Tempered	240	23	○	○
	14		Austenitic	180	10	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	◎	◎
	16		Pearlitic (Martensitic)	260	26	○	○
	17	Nodular cast iron	Ferritic	160	3	◎	◎
	18		Pearlitic	250	25	○	○
	19		Ferritic	130		◎	◎
20	Malleable cast iron	Pearlitic	230	21	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	○
	22		Curable Hardened	100		○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○
	24		≤ 12% Si, Curable Hardened	90		○	○
	25		> 12% Si, Not Curable	130			
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○
	27		CuZn, CuSnZn (Brass)	90		○	○
	28		CuSn, lead-free copper and electrolytic copper	100		○	○
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic Rubber, Wood, etc.			
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15		
	32		Cured	280	30		
	33		Annealed	250	25		
	34		Ni or Co Based Cured	350	38		
	35		Cast	320	34		
	36		Titanium Alloys	Pure Titanium	400 Rm		
37	Alpha + Beta Alloys	Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55		
	39		Hardened	630	60		
	40	Chilled Cast Iron	Cast	400	42		
	41	Hardened Cast Iron	Hardened	550	55		

K1143	K1153	K2101	K2111	K2121	K2102	K2112	K21B1
Straight	LH Spiral	Straight	LH Spiral	LH Spiral (Quick Spiral)	Straight	LH Spiral	LH Spiral
D2.0	D2.0	D2.0	D2.0	D4.0	D10.0	D10.0	D2.0
D60.0	D60.0	D20.0	D20.0	D20.0	D50.0	D50.0	D20.0
408	410	412	414	416	417	419	421

Bright

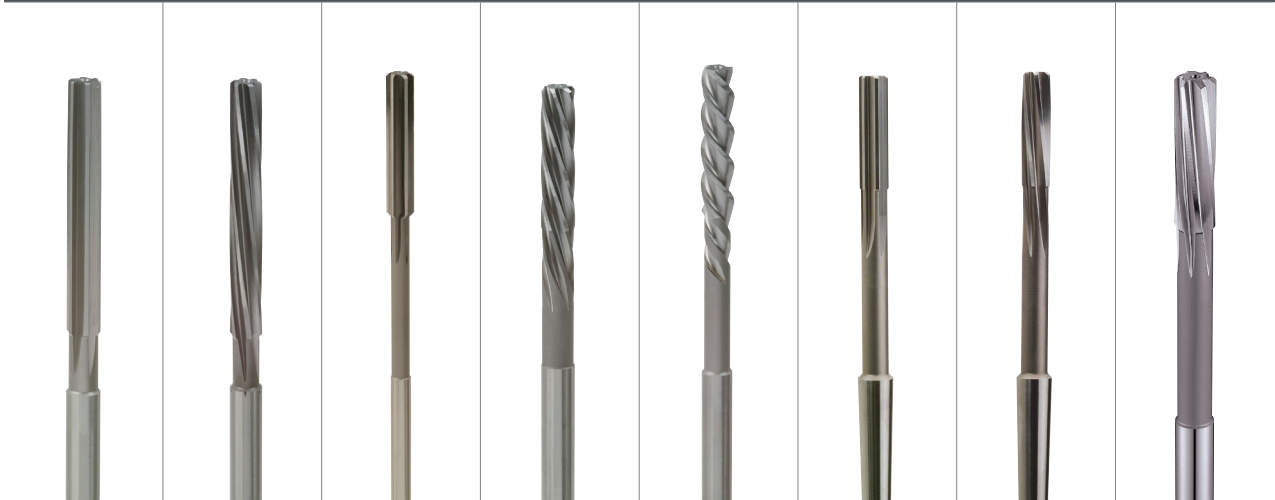

								1
								2
								3
								4
								5
								6 P
								7
								8
								9
								10
								11
								12
								13 M
								14
								15
								16
								17 K
								18
								19
								20
								21
								22
								23
								24
								25 N
								26
								27
								28
								29
								30
								31
								32
								33
								34 S
								35
								36
								37
								38
								39 H
								40
								41