


External Holders for CN** Insert

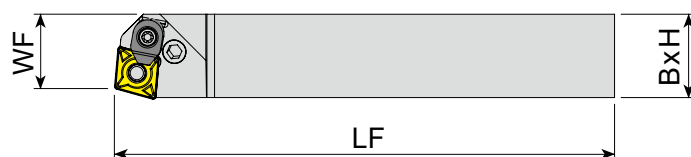

* 'C' Letter at Last : Optional Clamp Included

: p. 28

Unit:mm

Series	Designation	EDP 2700.. R	L	H	B	WF	LF	Insert
 PCBNR/L (Lever Type 75°)	PCBNR/L 2525M 16C	0444	0445	25	25	22	150	CN1606
	PCBNR/L 3232P 16C	0446	0447	32	32	27	170	
	PCBNR/L 3232P 19C	0448	0449	32	32	37	170	CN1906
	PCBNR/L 4040S 19C	0450	0451	40	40	37	250	
 PCLNR/L (Lever Type 95°)	PCLNR/L 1616H 12	0464	0465	16	16	20	100	CN1204
	PCLNR/L 2020K 12C	0466	0467	20	20	25	125	
	PCLNR/L 2525M 12C	0468	0469	25	25	32	150	
	PCLNR/L 3232P 12C	0470	0471	32	32	40	170	
	PCLNR/L 2525M 16C	0472	0473	25	25	32	150	CN1606
	PCLNR/L 3232P 16C	0474	0475	32	32	40	170	
	PCLNR/L 2525M 19C	0476	0477	25	25	32	150	CN1906
	PCLNR/L 3232P 19C	0478	0479	32	32	40	170	
 TCLNR/L (Hole Clamp Type 95°)	PCLNR/L 4040S 19C	0480	0481	40	40	50	250	CN1906
	TCLNR/L 2020K 12	0482	0483	20	20	25	125	CN1204
	TCLNR/L 2525M 12	0484	0485	25	25	32	150	
	TCLNR/L 3232P 12	0486	0487	32	32	40	170	
	TCLNR/L 2525M 16	0492	0493	25	25	32	150	CN1606
	TCLNR/L 3232P 16	0494	-	32	32	40	170	

Series	Size	Lever	Lever Screw	Clamp	Clamp Screw	Upper Ring	Lower Ring	Shim	Shim Screw	Shim Pin	Allen Key
PCBNR/L	..16C	YAPL-04	YALV-04-M8x22	YACK-09	YAAV-05-M6x15	-	-	YAACN-3-0002	-	YAAY-03	YAAL-03-3
	..19C	YAPL-05	YALV-05-M10x27	YACK-09	YAAV-05-M6x15	-	-	YAACN-3-0003	-	YAAY-04	YAAL-05-4
PCLNR/L	..12	YAPL-02	YALV-03-M8x19	-	-	-	-	YAACN-3-0001	-	YAAY-02	YAAL-03-3
	..2020~3232..12C	YAPL-02	YALV-03-M8x19	YACK-05	Y4015-M4x11	-	-	YAACN-3-0001	-	YAAY-02	YAAL-03-3
	..16C	YAPL-04	YALV-04-M8x22	YACK-09	YAAV-05-M6x15	-	-	YAACN-3-0002	-	YAAY-03	YAAL-03-3
	..19C	YAPL-05	YALV-05-M10x27	YACK-09	YAAV-05-M6x15	-	-	YAACN-3-0003	-	YAAY-04	YAAL-05-4
TCLNR/L	..12	-	-	YATK-02	YAKV-30-M6x22	YABPL-01	YAS-01	YAACN-3-0001	YAAV-02-M5x12	-	YAAL-03-3
	..16	-	-	YATK-04	YAKV-19-M7x25	YABPL-02	-	YAACN-3-0002	YAAV-05-M6x15	-	YAAL-05-4

Turning - Name Code System

External Turning Holder Code (Metric)

*Metric

1	2	3	4	5	6	7	8	9	10
P	C	L	N	R	25	25	M	12	(C)
Clamping System	Insert Shape (1st Letter of Insert)	Tool Style	Insert Clearance (2nd Letter of Insert)	Tool Hand	Shank Height (H)	Shank Width (B)	Length (LF)	Insert Size	(Optional Clamp)

1 - Clamping System

Symbol	System
C	Top Clamp (No Clamping Hole Insert)
M	Pin & Top Clamp (Straight Clamping Hole Insert)
P	Lever Lock (Straight Clamping Hole Insert)
S	Screw (Screw Clamping Hole Insert)
T (D, A)	Hole Clamp (Straight Clamping Hole Insert)

2, 4 — Insert Compatibility *

T	C	L	N	R	C	N	M	G
holder					insert			

* Related to Insert Designation to check compatibility

3 - Tool Style

Approach Angle (KAPR)	Side Direction		End Direction
	Straight Shank	Offset Shank	
45°	D 	S 	
60°		T 	
63°	N 		
72.5°	V 		
75°	B 		K
90°	A 	G 	F
93°		J 	U
95°		L (Both Direction) 	
107.5°		H 	

Turning - Name Code System

External Turning Holder Code (Metric)

*Metric

1	2	3	4	5	6	7	8	9
S	D	J	C	R	20	20	K	11
Clamping System	Insert Shape (1st Letter of Insert)	Tool Style	Insert Clearance (2nd Letter of Insert)	Tool Hand	Shank Height (H)	Shank Width (B)	Length (LF)	Insert Size


5 - Hand Direction

Symbol	Hand Direction
R	Right Hand
L	Left Hand
N	Neutral

8 - Length (LF)

Symbol	Length (mm)	Symbol	Length (mm)
E	70	Q	180
F	80	R	200
H	100	S	250
K	125	T	300
M	150	U	350
P	170	V	400

6, 7 - Shank Height (H) Shank Width (B)

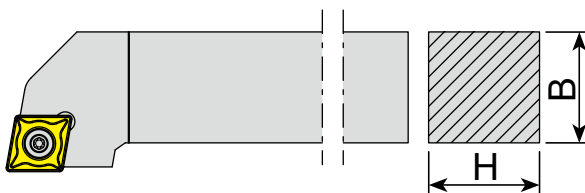

9 - Insert Size *

Examples	is Compatible with...
PCLNR 2525M 12	CNMG 120408
SCLCR 2020K 09	CCMT 09T308
TWLNr 2525M 08	WNMG 080408

* Related to Insert Designation to check compatibility

(10 - Optional Clamp)

Symbol	Optional Clamp
C	Included